



INVEST IN THE FUTURE

CHARGE



CHARGERS - BATTERY SUPPORT UNITS - BOOSTERS - STARTERS
TESTERS - PORTABLE ENERGY - JUMPER CABLES - EV CHARGING - ACCESSORIES

2025 A

Scan to download
PDF of catalogue
with prices



A solid manufacturing group



900 people

C1+

Credit Rating
Banque de France



€ 140 000 000



55 000 m²
2 factories



FRENCH MANUFACTURER
SINCE 1964

A family company



Nicolas & Bruno
Bouygues



Global coverage

125 countries

3 catalogues

3 500+ references



- MMA/SAW
- TIG/GTAW
- MIG-MAG/GMAW-FCAW
- Plasma cutting
- Induction heating
- Stud welding
- Spot welding
- Accessories
- Protection
- Consumables



- Spot welding
- Dent pulling
- MIG-MAG/GMAW-FCAW
- Plasma cutting
- Induction heating
- Riveting
- Lifting
- Bodyshop tools



- Chargers
- Battery support units
- Boosters
- Starters
- Testers
- Portable energy
- Jumper cables
- EV charging
- Accessories



GYS FRANCE - HEADQUARTERS
Laval



GYS LOGISTIC CENTER
Laval



GYS GERMANY
Aachen



GYS U.K.
Rugby



GYS CHINA
Shanghai



GYS ITALIA
Venezia



GYS IBERICA
Madrid


Table of contents

CHARGERS & BATTERY SUPPORT UNIT	6 > 47
STARTERS & CHARGERS	48 > 51
BOOSTERS	52 > 70
ACCESSORIES	71 > 87



★★★★★ **THEY TRUST US** ★★★★★

ILS NOUS FONT CONFIANCE

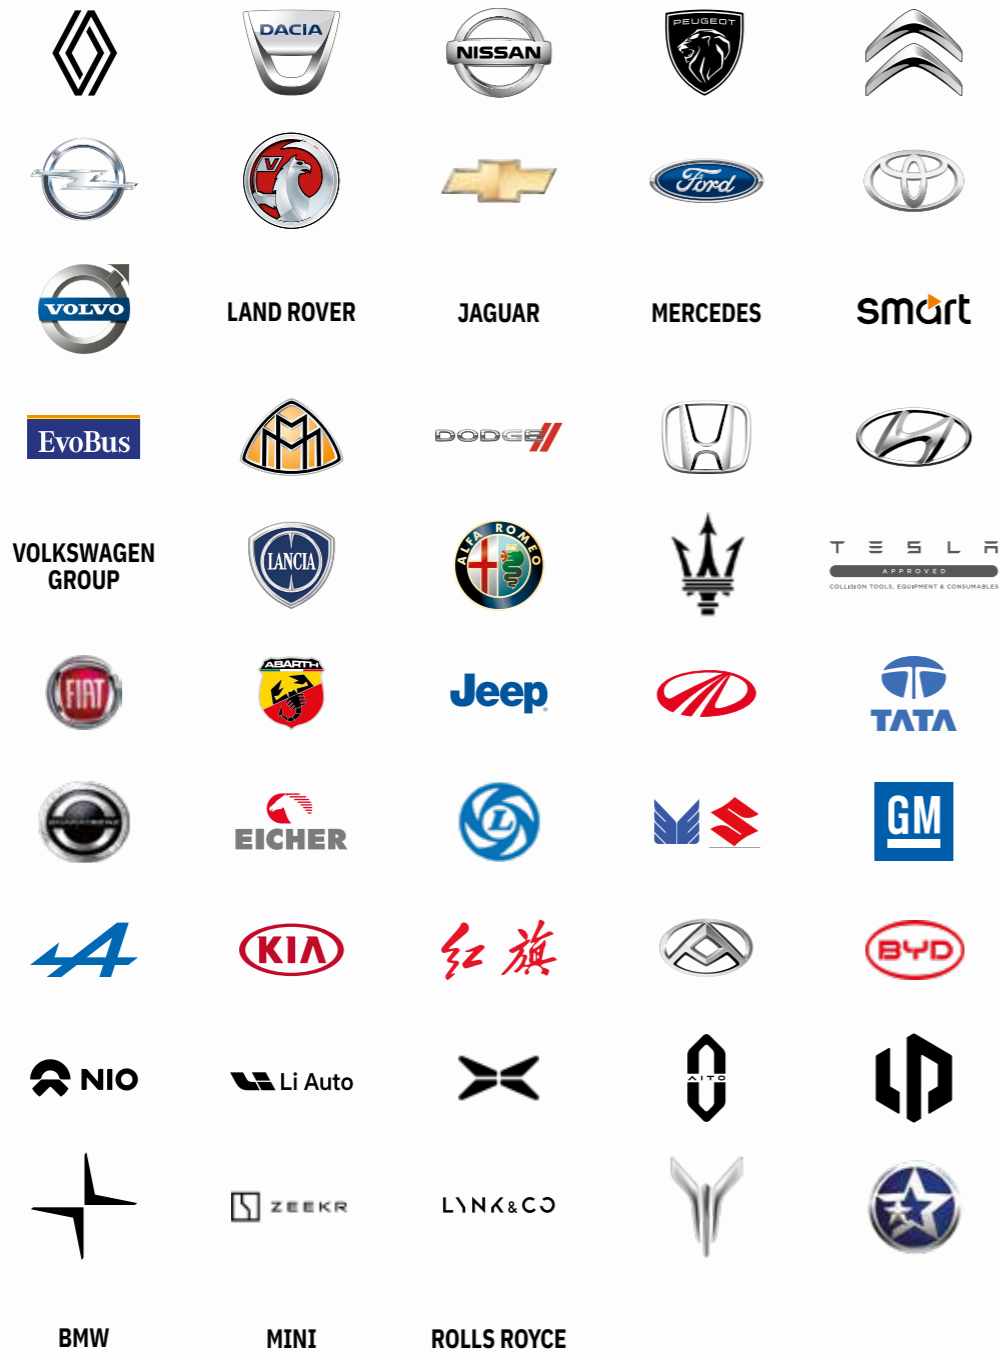

CHARGERS & BATTERY SUPPORT UNIT

6 - 12 - 16 - 24 - 36 - 48 V

GYSFLASH

GYSFLASH Pb	6
GYSFLASH LITHIUM	9
GYSFLASH Pb / LITHIUM	10
GYSFLASH ON BOARD	18

CONVERTER DC/DC

ENERGYS DC · DC CHARGER	19
-------------------------	----

BATTERY SUPPORT UNIT


GYSFLASH PRO	20
GYSFLASH PRO CNT	22
STARTFLASH	28
EQUALIZE MODE	30
CNT TECHNOLOGY & ACCESSORIES	34

MORE

ARTIC	40
ENERGY / TCB	41
CT / CA / WATTMATIC	42
BATIUM	44
DIAG-BATIUM	46
MULTICHARGE STATION	47

CHARGERS Pb

BEST SELLER

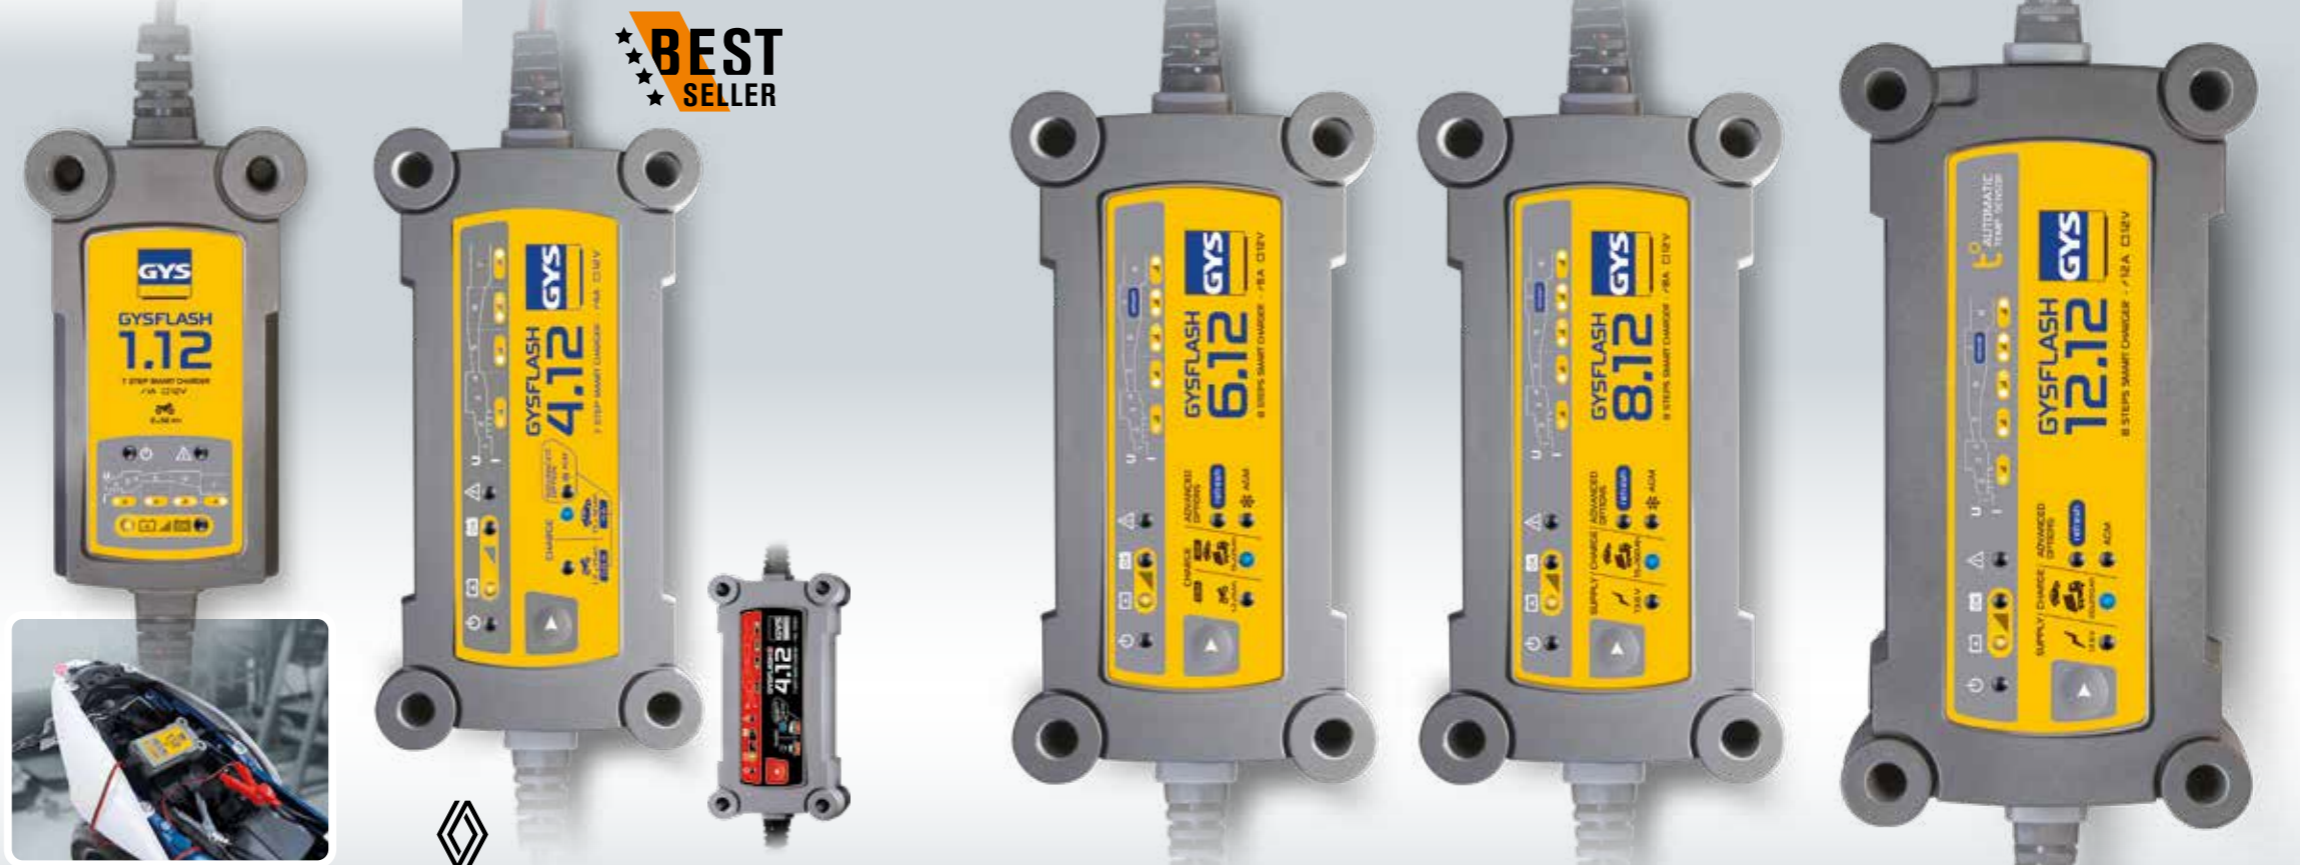

GYSFLASH TECHNOLOGY



SSM
Save and load settings. Automatic restart in case of power cut.
Mémorisation des réglages. Redémarrage automatique en cas de coupure électrique.
Einstellungsspeicherung. Automatisches Starten nach einem Netzausfall.



Start/stop Engine :
Compatible with Start/Stop vehicles.
Compatible véhicules Start/Stop.
Geeignet für START-STOP- Fahrzeuge.



Can Bus ready: compatible with Can Bus Technology, the Gysflash can be connected to the motorcycle 12V socket (cable is optional).

Can bus ready : compatible avec la technologie Can Bus, le Gysflash se branche directement sur la prise 12 V de la moto (câble en option).

Can-Bus Ready: Mit der Can-Bus Technologie kompatibel. Das GYSFLASH wird direkt an den 12V-Anschluss des Motorrads angeschlossen (Kabel optional).



Auto Recovery : Recovers deeply discharged (min 2V) and/or sulfated batteries.

Auto Recovery : Récupération des éléments des batteries profondément déchargées (mini 2V) et/ou sulfatées.

Auto Recovery: Wiederherstellung der Zellen bei tiefentladenen bzw. sulfatierten Batterien (min. 2V).



“Cold charge” mode: performance-enhancing charging mode for cold or freezing weather conditions.

Mode “Cold charge”: optimisation des performances en cas de temps froid ou de gel.

-Cold Charge--Modus: Leistungsoptimierung bei kaltem Wetter oder bei Frost.



Fitted with a highly sensitive sensor, Gysflash automatically adjusts the charge based on ambient temperature.

Équipé d'un capteur haute sensibilité, le Gysflash ajuste automatiquement les paramètres de charge en fonction de la température ambiante.

Ausgestattet mit einem hochempfindlichen Sensor stellt das GYSFLASH automatisch die Ladeparameter der Umgebungstemperatur entsprechend ein.



Power supply mode: Optimum floating charge, ideal for use during battery change to protect vehicle memory.
Also for when the vehicle is not in use for extended periods or for demonstration use.

Source d'énergie : mode de maintien optimal de l'état de charge. Idéal pour les véhicules en hivernage, de démonstration, ou pour le remplacement de batterie.

Energiequelle: Aufrechterhaltung des Batteriezustands. Ideal für Saison-, Ausstellungsfahrzeuge oder bei Batteriewechsel.

GYSFLASH 1.12

1 A



7 STEP

F FLASH Connector



1.45 m 0.45 m 0.45 m
029361 **56,00 €HT**
029514

GYSFLASH 4.12 & 4.12S

0.8/4 A



7 STEP

F FLASH Connector



4.12 029422 **76,00 €HT**
029521
4.12S (110 V) 069190
072701
072817


GYSFLASH 6.12

0.8/6 A



8 STEP

F FLASH Connector



029378 **98,00 €HT**
029613


GYSFLASH 8.12

8 A



8 STEP

S SAE Connector



029385 **103,00 €HT**
029545

GYSFLASH 12.12

12 A



8 STEP

S SAE Connector



029392 **151,00 €HT**
029552

110V




GYSFLASH 4.12 S
GYSFLASH 1.12 PL S



SMART CHARGE

7 STEP / 8 STEP

1. Status analysis
2. Recovery
3. Test desulfation
4. Desulfation
5. Fast charge 80%
6. Absorption
7. Refresh (for "8 step" only)
8. Floating 100%



REFRESH 8 STEP

Rebalancing of the battery cells for greater longevity (not available on all models).
Rééquilibrage des cellules de la batterie pour plus de longévité (suivant modèle).
Regenerierung der Batteriezellen für eine längere Lebensdauer (je nach Modell).

PATENTS REGISTERED NUMBERS
002280008 & 002279927
EUROPEAN TRADEMAR & DESIGN

	50 / 60 Hz	Power	I _{charge}	V	Charge	Maintenance	Zz	Ondulation/ Ripple	Charging curve	IP	Weight	Dimensions	Volume
GYSFLASH 1.12	220-240 V AC	18 W	1 A	12 V	2 > 32 Ah	2 > 100 Ah	<0.4 Ah/month	<150 mV Rms	IUoU	7 steps	0.44 kg	13 × 8 × 3.8 cm	30 × 15.5 × 6 / 0.6
GYSFLASH 4.12	220-240 V AC	70 W	0,8/4 A	12 V	1.2 > 90 Ah	1.2 > 130 Ah	<0.4 Ah/month	<150 mV Rms	IUoU	7 steps	0.69 kg	17 × 9 × 5.1 cm	34.5 × 17.9 × 36.2 / 0.89
GYSFLASH 4.12S	100-127 V AC												
GYSFLASH 6.12	220-240 V AC	90 W	0,8/6 A	12 V	1.2 > 125 Ah	1.2 > 170 Ah	<0.4 Ah/month	<150 mV Rms	IUoU	8 steps	0.77 kg	19 × 10 × 5.2 cm	36 × 19.5 × 7 / 1
GYSFLASH 8.12	220-240 V AC	130 W	8 A	12 V	15 > 160 Ah	15 > 240 Ah	<0.4 Ah/month	<150 mV Rms	IUoU	8 steps	0.85 kg	19 × 10 × 5.2 cm	36 × 19.5 × 7 / 1
GYSFLASH 12.12	220-240 V AC	195 W	12 A	12 V	20 > 250 Ah	20 > 330 Ah	<0.4 Ah/month	<100 mV Rms	IUoU	8 steps	1.1 kg	22.1 × 11.1 × 5.8 cm	36.4 × 20 × 6.8 / 1.3

DESIGN GYS FRANCE

MADE IN GYS CHINA

Download the page with prices





CHARGERS Pb



HERITAGE • 6/12V

GYSFLASH 6 HERITAGE

0.8/6 A



029538 98,00 €HT

6/12/24V

GYSFLASH 6.24

0.8/6 A



029460 114,00 €HT

GYSFLASH 9.24

9 A



029477 164,00 €HT

Model	Voltage	Power	I charge	V	Charge	Maintenance	Zz	Ondulation/Ripple	Charging curve	Steps	IP	Weight	Dimensions (LxWxH)	Weight (kg)	Dimensions (cm/kg)
GYSFLASH 6 HERITAGE	220-240 V AC	2m	90 W	0.8/6 A	6/12 V	1.2 > 125 Ah	1.2 > 170 Ah	<0.4 Ah/month	<150 mV Rms	IUoU	8 steps	IP 65	0.77 kg	19 x 10 x 5.2 cm	36.5 x 19.4 x 7 cm / 1
GYSFLASH 6.24	220-240 V AC	2m	130 W	0.8/6 A	6/12 V	1.2 > 125 Ah	1.2 > 170 Ah	<0.4 Ah/month	<150 mV Rms	IUoU	7 step	IP 65	0.85 kg	19 x 10 x 5.2 cm	36.5 x 19.5 x 7 cm / 1
				0.8/4 A	24 V	1.2 > 100 Ah	1.2 > 140 Ah								
GYSFLASH 9.24	220-240 V AC	2m	190 W	9 A	6/12 V	18 > 220 Ah	18 > 300 Ah	<0.4 Ah/month	<100 mV Rms	IUoU	8 step	IP 65	1.1 kg	22.1 x 11.1 x 5.8 cm	36.5 x 19.5 x 7 cm / 1.3
				6 A	24 V	15 > 125 Ah	15 > 170 Ah								

GYSFLASH TECHNOLOGY



Save and load settings. Automatic restart in case of power cut.
Mémorisation des réglages. Redémarrage automatique en cas de coupure électrique.
Einstellungsspeicherung. Automatisches Starten nach einem Netzausfall.



Start/stop Engine : Compatible with Start/Stop vehicles. Compatible véhicules Start/Stop. Geeignet für START-STOP- Fahrzeuge.



Can Bus ready: compatible with Can Bus Technology, the Gysflash can be connected to the motorcycle 12V socket (cable is optional).
Can bus ready : compatible avec la technologie Can Bus, le Gysflash se branche directement sur la prise 12 V de la moto (câble en option).
Can-Bus Ready: Mit der Can-Bus Technologie kompatibel. Das GYSFLASH wird direkt an den 12V-Anschluss des Motorrads angeschlossen (Kabel optional).



Auto Recovery : Recovers deeply discharged (min 2V) and/or sulfated batteries. Auto Recovery : Récupération des éléments des batteries profondément déchargées (mini 2V) et/ou sulfatées.
Auto Recovery: Wiederherstellung der Zellen bei tiefentladenen bzw. sulfatierten Batterien (min. 2V).




Fitted with a highly sensitive sensor, Gysflash automatically adjusts the charge based on ambient temperature.
Équipé d'un capteur haute sensibilité, le Gysflash ajuste automatiquement les paramètres de charge en fonction de la température ambiante.
Ausgestattet mit einem hochempfindlichen Sensor stellt das GYSFLASH automatisch die Ladeparameter der Umgebungstemperatur entsprechend ein.

SMART CHARGE 7 STEP / 8 STEP / 8 STEP LiFePO4

Pb


- Status analysis
- Recovery
- Test desulfation
- Desulfation
- Fast charge 80%
- Absorption
- Refresh (for "8 step" only)
- Floating 100%



Rebalancing of the battery cells for greater longevity (not available on all models).
Rééquilibrage des cellules de la batterie pour plus de longévité (suivant modèle).
Regenerierung der Batteriezellen für eine längere Lebensdauer (je nach Modell).

LiFePO4 (LFP)

- UVP Wake up - Status analysis
- Recovery
- Fast charge 90%
- Absorption 95%
- Test
- Completion
- Equalization
- Floating 100%



UVP Wake up (Under Voltage Protection) Battery reactivation when in UVP protection. Réactivation de la batterie en protection UVP. Reaktivierung der Batterie mit UVP-Schutz.

Equalizing Balancing System Balancing of the battery cells. Équilibrage des cellules. Ausgleich der Batteriezellen.



CHARGERS LiFePO4



12V

GYSFLASH 1.12 Lithium

1 A



029675 61,00 €HT

GYSFLASH 6.12 Lithium

4/6 A



029729 100,00 €HT

Download the page with prices



Model	Voltage	Power	I charge	V	Charge	Maintenance	Zz	Ondulation/Ripple	Charging curve	Steps	IP	Weight	Dimensions (LxWxH)	Weight (kg)	Dimensions (cm/kg)
GYSFLASH 1.12 Lithium	220-240 V AC	1m	18 W	1 A	12 V	0.5 > 20 Ah	0.5 > 50 Ah	<0.4 Ah/month	<150 mV Rms	IUoU	8 step	IP 65	0.44 kg	13 x 8 x 3.8 cm	29.7 x 15 x 5.7 / 0.6
GYSFLASH 6.12 Lithium	220-240 V AC	2m	90 W	4/6 A	12 V	1.2 > 125 Ah	1.2 > 170 Ah	<0.4 Ah/month	<150 mV Rms	IUoU	8 step	IP 65	0.77 kg	19 x 10 x 5.2 cm	36.5 x 19.5 x 7 / 1



CHARGERS Pb / LiFePO₄



OPTION
Gysflash 18.12 PL,
30.12 PL, 20.12/24 PL,
10.36/48 PL

Magnetfix 20
026063 37,00 € HT



x4

12V


12/24V

GYSFLASH 1.12 PL & 1.12 PL S

1A

GO > 7V | SSM | START STOP | CAN BUS

7 STEP Pb | 8 STEP LiFePO₄

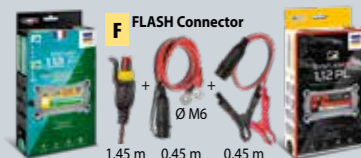

1.12 PL 026902 **67,00 € HT**
027541

1.12 PL S (110 V) 070851
072794
072824

GYSFLASH 8.12 PL

1/4 / 8A

GO > 2V | SSM | START STOP | CAN BUS

7 STEP Pb | 8 STEP LiFePO₄



069282 **121,00 € HT**

GYSFLASH 18.12 PL

7/12 / 18A GO > 2V

GO > 2V | SSM | START STOP

t° | 7 STEP Pb | 8 STEP LiFePO₄



026926 **245,00 € HT**

GYSFLASH 30.12 PL

7/15 / 30A

GO > 2V | SSM | START STOP

t° | 7 STEP Pb | 8 STEP LiFePO₄



029668 **299,00 € HT**
026070

GYSFLASH 20.12/24 PL

7/15 / 20A

GO > 2V | SSM | START STOP

t° | 7 STEP Pb | 8 STEP LiFePO₄



026049 **294,00 € HT**
027558

DESIGN GYS FRANCE	MADE IN GYS CHINA	MADE IN FRANCE	50 / 60 Hz	Power	I _{charge}	V	Charge	Maintenance	Zz	Ondulation/ Ripple	Charging curve	IP	Weight	Dimensions	L x W x H cm / kg	
GYSFLASH 1.12 PL	GYSFLASH 1.12 PL S	GYSFLASH 1.12 PL	220-240 V AC	20 W	1 A	12 V	2 > 32 Ah (Pb) 0,5 > 20 Ah (LiFePO ₄)	2 > 100 Ah (Pb) 0,5 > 50 Ah (LiFePO ₄)	<0.4 Ah/month	<150 mV Rms	IUoU	7 step (Pb) 8 step (LiFePO ₄)	IP 65	0,69 kg	17 × 9 × 5,1 cm	33 × 17,5 × 6 / 0,8
GYSFLASH 8.12 PL	GYSFLASH 8.12 PL	GYSFLASH 8.12 PL	220-240 V AC	130 W	1/4/8 A	12 V	15 > 160 Ah (Pb) 1,2 > 160 Ah (LiFePO ₄)	15 > 240 Ah (Pb) 1,2 > 240 Ah (LiFePO ₄)	<0.4 Ah/month	<150 mV Rms	IUoU	7 step (Pb) 8 step (LiFePO ₄)	IP 65	0,85 kg	19 × 10 × 5,2 cm	—
GYSFLASH 18.12 PL	GYSFLASH 18.12 PL	GYSFLASH 18.12 PL	220-240 V AC	300 W	7/12/18 A	12 V	15 > 270 Ah (Pb) 7 > 270 Ah (LiFePO ₄)	15 > 270 Ah (Pb) 7 > 270 Ah (LiFePO ₄)	<0.5 Ah/month	<100 mV Rms	IUoU	7 step (Pb) 8 step (LiFePO ₄)	IP 31	1,55 kg	19 × 19 × 7,3 cm	30 × 22 × 9 / 1,9

DESIGN GYS FRANCE	MADE IN FRANCE	MADE IN FRANCE	50 / 60 Hz	Power	I _{charge}	V	Charge	Maintenance	Zz	Ondulation/ Ripple	Charging curve	IP	Weight	Dimensions	L x W x H cm / kg	
GYSFLASH 30.12 PL	GYSFLASH 30.12 PL	GYSFLASH 30.12 PL	220-240 V AC	500 W	7/15/30 A	12 V	15 > 375 Ah (Pb) 7 > 375 Ah (LiFePO ₄)	15 > 375 Ah (Pb) 7 > 375 Ah (LiFePO ₄)	<0.5 Ah/month	<150 mV Rms	IUoU	7 step (Pb) 8 step (LiFePO ₄)	IP 31	1,85 kg	19 × 19 × 7,3 cm	30 × 22 × 9 / 2,2
GYSFLASH 20.12/24 PL	GYSFLASH 20.12/24 PL	GYSFLASH 20.12/24 PL	220-240 V AC	500 W	7/15/20 A 7/15 A	12 V 24 V	15 > 300 Ah (Pb) 7 > 300 Ah (LiFePO ₄)	15 > 300 Ah (Pb) 7 > 300 Ah (LiFePO ₄)	<1 Ah/month	<150 mV Rms	IUoU	7 step (Pb) 8 step (LiFePO ₄)	IP 31	1,85 kg	19 × 19 × 7,3 cm	30 × 22 × 8,5 / 2,2



Download the page with prices

GYSFLASH TECHNOLOGY

SSM

Save and load settings. Automatic restart in case of power cut.

Mémorisation des réglages. Redémarrage automatique en cas de coupure électrique.

Einstellungsspeicherung. Automatisches Starten nach einem Netzausfall.

START STOP

Start/stop Engine :
Compatible with Start/Stop vehicles.
Compatible véhicules Start/Stop.
Geeignet für START-STOP- Fahrzeuge.

Auto Recovery

Auto Recovery : Recovers deeply discharged (min 2V) and/or sulfated batteries.

Auto Recovery : Récupération des éléments des batteries profondément déchargées (mini 2V) et/ou sulfatées.

Auto Recovery: Wiederherstellung der Zellen bei tiefentladenen bzw. sulfatierten Batterien (min. 2V).

t°

Fitted with a highly sensitive sensor, Gysflash automatically adjusts the charge based on ambient temperature.


Équipé d'un capteur haute sensibilité, le Gysflash ajuste automatiquement les paramètres de charge en fonction de la température ambiante.

Ausgestattet mit einem hochempfindlichen Sensor stellt das GYSFLASH automatisch die Ladeparameter der Umgebungstemperatur entsprechend ein.

SMART CHARGE 7 / 8 STEP


Pb

1. Status analysis
2. Recovery
3. Test desulfation
4. Desulfation
5. Fast charge 80%
6. Absorption
7. Floating 100%



LiFePO₄ (LFP) / Li-ion

1. UVP Wake up
2. Recovery
3. Fast charge 90%
4. Absorption 95%
5. Test
6. Completion
7. Equalization
8. Floating 100%



UVP Wake up (Under Voltage Protection)
Battery reactivation when in UVP protection.
Réactivation de la batterie en protection UVP.
Reaktivierung der Batterie mit UVP-Schutz.

Equalizing Balancing System
Balancing of the battery cells.
Équilibrage des cellules.
Ausgleich der Batteriezellen.

GYSFLASH Pb / LITHIUM

CHARGER Pb / LiFePO₄

INTENSIVE



SC **SMART COOLING TECHNOLOGY**

100% DUST PROOF



SILENT

IP 23

INDOOR / OUTDOOR

12V

GYSFLASH 32.12 PL

7/15 / 30 A

GO > 2V SSM START STOP

7 STEP Pb 8 STEP LiFePO₄

2,5 m - 6 mm²


027381 **450,00 €HT**

GYSFLASH Pb

CHARGER Pb

INCLUDED


Fixing kit



OPTIONS

Magnetfix 50

029637 **105,00 €HT**



GYSFLASH PRO vertical wall mounting kit

082694 **27,00 €HT**



INTENSIVE



SHOCK RESISTANT

IP 65

INDOOR / OUTDOOR

12/24V

GYSFLASH 15.24 XTREM

15 A

GO > 2V SSM START STOP

7 STEP Pb SC

5 m - 4 mm²

025813 **560,00 €HT**

Double insulation

ROBUST & SAFE
2 pts connection

included for Gysflash 15.24 XTREM
028760 **75,00 €HT**

INCLUDED

Fixing kit for Gysflash 32.12 PL, 15.24 XTREM



OPTIONS

NATO CONNECTOR
026780 **99,00 €HT**



2 pts/NATO 5 m - 4 mm²
025837 **255,00 €HT**

2 pts/NATO Spiral 5 m
028968 **472,00 €HT**



2 pts/DIN 1490 Emergency vehicle 5 m
028777 **210,00 €HT**

MADE IN FRANCE	PATENTS REGISTERED NUMBERS 002280008 & 002279927 EUROPEAN TRADEMARK & DESIGN	50/60 Hz	Power	I _{charge}	V	Charge	Maintenance	Zz	Ondulation/Ripple	Charging curve	IP	Weight	Dimensions	Box
														L x W x H cm / kg
	GYSFLASH 32.12 PL	230V	500W	7/15/30 A	12V	10 · 400 Ah	<0.5 Ah/month	<150 mV Rms	IUoU	IP 23	4,7 kg	8 × 25 × 20 cm	36 × 27,5 × 20,5 / 4,6	
	GYSFLASH 15.24 XTREM	230V	500W	7/10/15 A	12/24V	5 · 240 Ah	<1 Ah/month	<150 mV Rms	IUoU	IP 65	5,4 kg	7,5 × 25 × 21 cm	27 × 20 × 36 / 5,4	

GYSFLASH TECHNOLOGY

SSM

Save and load settings. Automatic restart in case of power cut.

Mémorisation des réglages. Redémarrage automatique en cas de coupure électrique.

Einstellungsspeicherung. Automatisches Starten nach einem Netzausfall.

START STOP

Start/stop Engine :
Compatible with Start/Stop vehicles.
Compatible véhicules Start/Stop.
Geeignet für START-STOP- Fahrzeuge.

Auto Recovery

Auto Recovery : Recovers deeply discharged (min 2V) and/or sulfated batteries.

Auto Recovery : Récupération des éléments des batteries profondément déchargées (mini 2V) et/ou sulfatées.

Auto Recovery: Wiederherstellung der Zellen bei tiefentladenen bzw. sulfatierten Batterien (min. 2V).

t°

Fitted with a highly sensitive sensor, Gysflash automatically adjusts the charge based on ambient temperature.


Équipé d'un capteur haute sensibilité, le Gysflash ajuste automatiquement les paramètres de charge en fonction de la température ambiante.

Ausgestattet mit einem hochempfindlichen Sensor stellt das GYSFLASH automatisch die Ladeparameter der Umgebungstemperatur entsprechend ein.

SMART CHARGE


Pb

1. Status analysis
2. Recovery
3. Test desulfation
4. Desulfation
5. Fast charge 80%
6. Absorption
7. Floating 100%



LiFePO₄ (LFP) / Li-ion

1. UVP Wake up - Status analysis
2. Recovery
3. Fast charge 90%
4. Absorption 95%
5. Test
6. Completion
7. Equalization
8. Floating 100%



UVP Wake up (Under Voltage Protection)
Battery reactivation when in UVP protection.
Réactivation de la batterie en protection UVP.
Reaktivierung der Batterie mit UVP-Schutz.

Equalizing Balancing System
Balancing of the battery cells.
Équilibrage des cellules.
Ausgleich der Batteriezellen.




GYSFLASH Pb / LITHIUM

ELECTRO MOBILITY CHARGERS

Pb / Lithium

LiFePO₄ / Li-ion / Li-Po /
NMC / LCO / MCO / NCA...

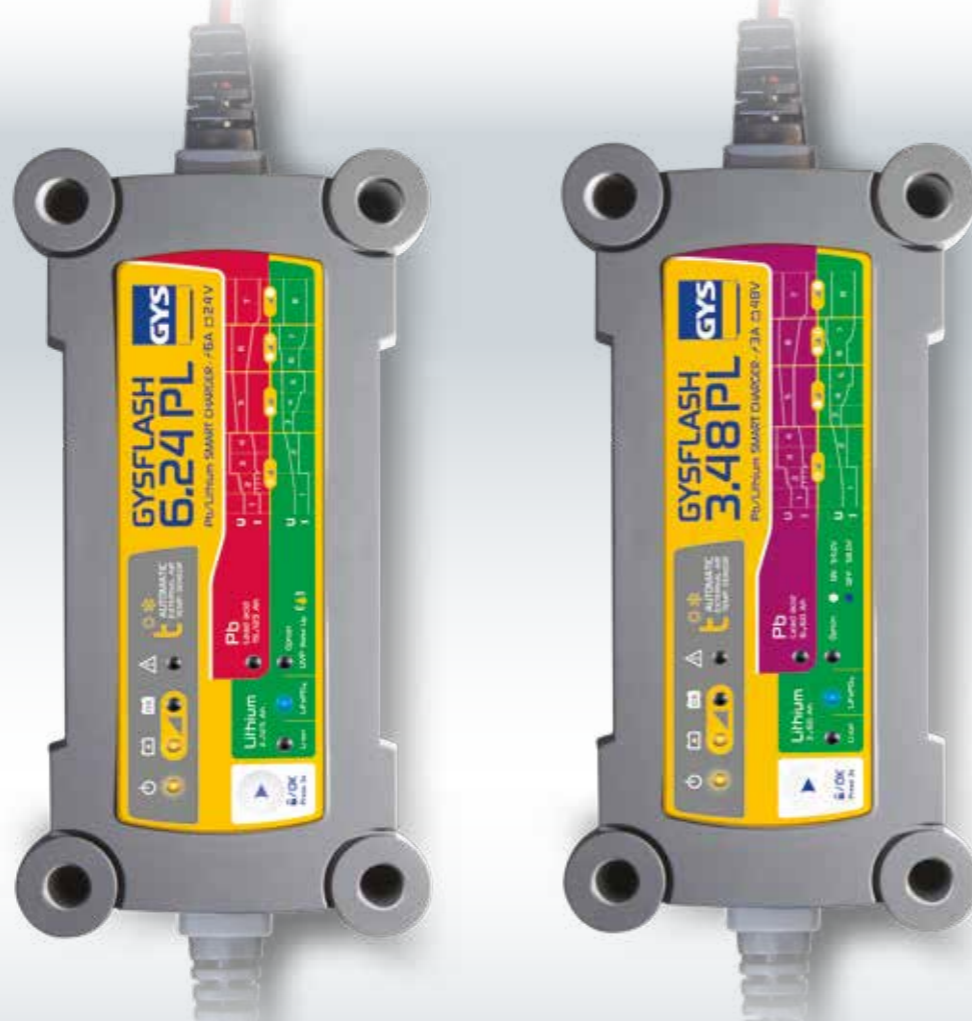

24 V • ELECTRICAL MOBILITY

GYSFLASH 6.24 PL

6 A GO > 2 V

GO > 2 V SSM t°

7 STEP Pb 8 STEP LiFePO₄ 8 STEP Li-ion



027398 **162,00 €HT**



48 • INDUSTRY / ELECTROMOBILITY

GYSFLASH 3.48 PL


3 A

GO > 5 V SSM t°

7 STEP Pb 8 STEP LiFePO₄ 8 STEP Li-ion



027893 **151,00 €HT**



OPTION Magnetfix 20
026063 **37,00 €HT**



36 / 48 • INDUSTRY / ELECTROMOBILITY

GYSFLASH 10.36/48 PL

10 A

GO > 5 V SSM t°

7 STEP Pb 8 STEP LiFePO₄ 8 STEP Li-ion



027060 **299,00 €HT**



DESIGN GYS FRANCE	PATENTS REGISTERED NUMBERS 002280008 & 002279927 EUROPEAN TRADEMARK & DESIGN	50 / 60 Hz	Power	I _{charge}	V	n cell			Charge	Maintenance	Zz	Ondulation/Ripple	Charging curve	IP	Person	Weight	L x W x H cm / kg	
						Pb	LFP	NMC										
MADE IN GYS CHINA	GYSFLASH 6.24 PL	220-240 V AC	2 m	190 W	6 A	24V	12	8	6	15 > 125 Ah (Pb) 2 > 125 Ah (Li)	15 > 170 Ah (Pb) 2 > 170 Ah (Li)	<0.4 Ah /month	<150 mV Rms	IUoU	7 step (Pb) 8 step (Li)	IP 65	1,1 kg	22.1 x 11.1 x 5.8 cm / 1.4
							12	15/16	13/14	6 > 60 Ah (Pb) 3 > 60 Ah (Li)	6 > 60 Ah (Pb) 3 > 60 Ah (Li)	<0.4 Ah /month	<150 mV Rms	IUoU	7 step (Pb) 8 step (Li)	IP 65	1,1 kg	22.1 x 11.1 x 5.8 cm / 1.2
MADE IN FRANCE	GYSFLASH 10.36/48 PL	220-240 V AC	2 m	500 W	10 A	36V	18	12	9	20 > 230 Ah (Pb) 10 > 230 Ah (Li)	20 > 230 Ah (Pb) 10 > 230 Ah (Li)	<0.4 Ah /month	<150 mV Rms	IUoU	7 step (Pb) 8 step (Li)	IP 31	1,85 kg	19 x 19 x 7.3 cm / 2
							18	15/16	13/14	15 > 160 Ah (Pb) 8 > 160 Ah (Li)	15 > 160 Ah (Pb) 8 > 160 Ah (Li)	<0.4 Ah /month	<150 mV Rms	IUoU	7 step (Pb) 8 step (Li)	IP 31	1,85 kg	19 x 19 x 7.3 cm / 2

ELECTROMOBILITY

MOBILITY



SAE CONNECTOR S3
027428 **10,10 €HT**

OUTDOOR



ANDERSON CONNECTOR
A3
027855 **24,80 €HT**

SAE CONNECTOR S4
027442 **19,20 €HT**

SAE CONNECTOR S3
027428 **10,10 €HT**

INDUSTRY



SAE CONNECTOR S5
027473 **15,20 €HT**

MEDICAL



SAE CONNECTOR S3
027428 **10,10 €HT**






GYSFLASH ON BOARD

CHARGERS ON BOARD

Pb NMC / LCO / MCO / NCA...
Lithium LiFePO4 / Li-ion / Li-Po



BROCHURE
GYSFLASH
18.12 PL-E



INCLUDED



Ø 5.5 mm
GYSFLASH 18.12 PL-E, 15.24 PL-E,
8.48 PL-E
Fixing Kit

PFC POWER FACTOR CORRECTION

185 V ↔ 265 V



OPEN & CONNECT

cables not included



4 pts connector included
3G
0.75 x 2.5 mm²

3 pts connector included
max 2.5 mm² or
AWG14



21.5 cm

7 cm
GYSFLASH 18.12 PL-E

8 cm
GYSFLASH 30.12 PL-E
GYSFLASH 15.24 PL-E
GYSFLASH 8.48 PL-E

12V

GYSFLASH 18.12 PL-E

18 A

Pb/LFP
025806

GYSFLASH 30.12 PL-E

30 A COMING SOON

Pb/LFP

24V

GYSFLASH 15.24 PL-E

15 A

Pb / Traction / LFP / Li-ion
025943

48V

GYSFLASH 8.48 PL-E

8 A

Pb / Traction / LFP / Li-ion
025950




ENERGY DC · DC CHARGER

DC · DC CONVERTER REVERSIBLE

Pb Liquid / Gel, AGM
Lithium LiFePO4

NEW
01 2025

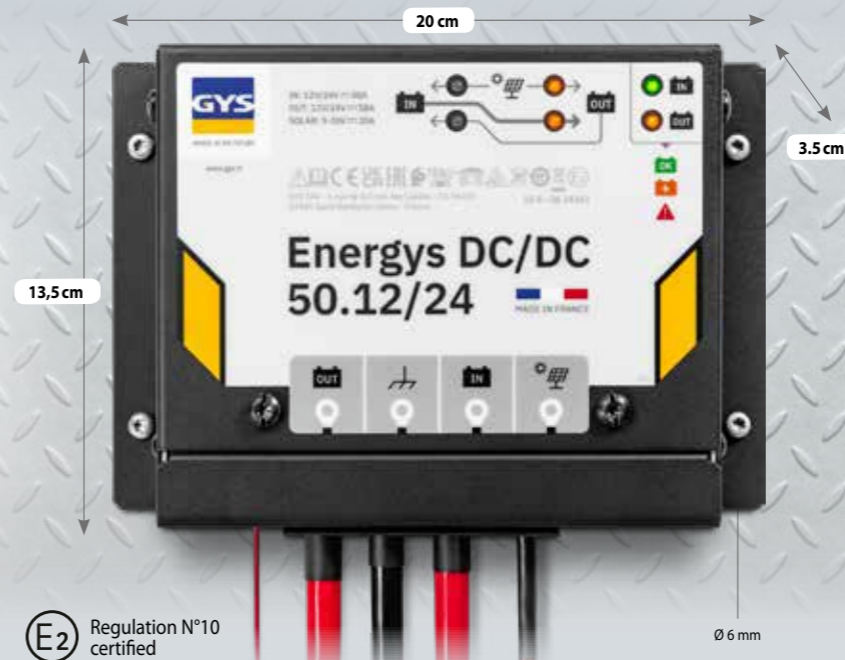

Regulation N°10 certified

ENERGY DC/DC 50.12 / 24


50 A

072534

Bat. input		Bat. output		Solar input		EFFICIENCY	Zz	mm	g
U	I max	U	I max	U _{MPPT}	I max				
12/24V	50A	12/24V	50A	9-30V	20A	98%	<2.5 mA	135 x 35 x 200	560


EURO 6 STANDARD

Vehicle started

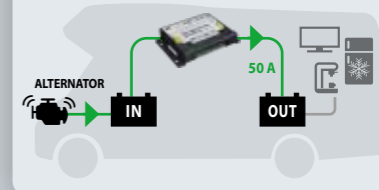


SOLAR REGULATOR

MPPT integrated (Max Power Point Tracker)

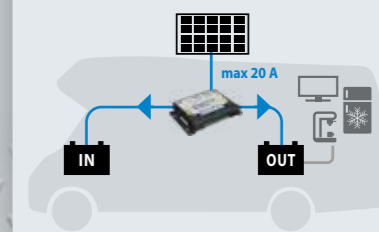


REVERSIBLE CHARGE (Over-wintering)

WITH GYSFLASH vehicle stopped

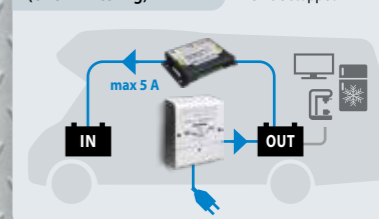

MORE OUTPUT POWER

PARALLEL CHARGING

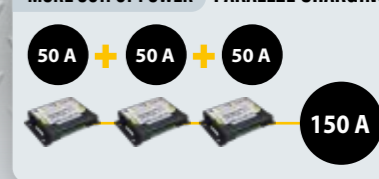

OPEN & CONNECT



Terminals included

Auxiliary connector included


cables not included




Download the page with prices

SMART CHARGE


Pb
1. Status analysis
2. Recovery
3. Test desulfation
4. Desulfation
5. Fast charge 80%
6. Absorption
7. Floating 100%



Pb TRACTION
1. Status analysis
2. Recovery
3. Sulphation test
4. Desulfation
5. Fast charge 80%
6. Absorption
7. Test Absorption
8. Refresh
9. Floating 100%



LiFePO4 (LFP) / Li-ion
1. Status analysis
2. Recovery
3. Fast charge 90%
4. Absorption 95%
5. Test
6. Completion
7. Equalization
8. Floating 100%



UVP Wake up (Under Voltage Protection)
Battery reactivation when in UVP protection.
Réactivation de la batterie en protection UVP.
Reaktivierung der Batterie mit UVP-Schutz.

Equalizing Balancing System
Balancing of the battery cells.
Équilibrage des cellules.
Ausgleich der Batteriezellen.

GYSFLASH PL-E TECHNOLOGIES

SSM Save and load settings. Automatic restart in the event of a power cut.
Mémorisation des réglages. Redémarrage automatique en cas de coupure électrique.
Einstellungsspeicherung. Automatisches Starten nach einem Netzausfall.

Auto Recovery : Recovers deeply discharged (min 2V) and/or sulfated batteries.
Auto Recovery : Récupération des éléments des batteries profondément déchargées (mini 2V) et/ou sulfatées.

Auto Recovery : Wiederherstellung der Batterien (min. 2V).

SPECIAL PROJECT - CONTACT US

Contact us for special projects. Quick customization : CAN BUS / CAN Open / J1939 / NMEA 2000 / R5485 / SM BVS / Automation / Relays...

SMART COOLING TECHNOLOGY

100% DUST PROOF

SILENT

HIGH EFFICIENCY Up to 15% Energy Saving
93%


ALU RUST PROTECTION

ULTRA LIGHTWEIGHT

VIBRATION & SHOCK RESISTANT

-25 / +60°C

ACCESSORIES

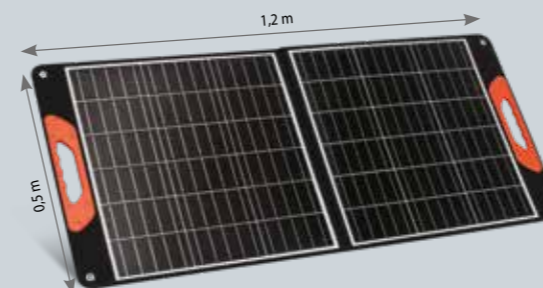

foldable

Solar panel

monocrystalline - ETFE quality
18V - 100 W max

OUTPUT
USB 1 : 5V/3A
USB 2 : 5V/3A ; 9V/2A ; 12V/1.5A
Type C : 5V/3A ; 9V/2A ; 12V/1.5A
Jack : 18V/5.6A max

079410 **244,00 €HT**




Battery monitor - Moniteur de batterie - Schlagzeugmonitor - Monitor de batería - Monitoraggio della batteria - Monitor baterii

12/24/36/48 V

Data analysis : Charge/discharge current (0-500A), Voltage (V), Temperature (°C), Input/output power (W), Remaining capacity (Ah)

Security detection : Overvoltage/ Undervoltage, Overcurrent, Overheating

082557 **68,80 €HT**



Shunt

RJ11 cable

Temperature cable



Battery coupler - Coupleur de batteries - Acoplador de batería - Batteriekoppler - Innesto batteria - Separator akumulatora

12 V - 140 A
Pb battery only
Euro 6 not compatible

082564 **35,40 €HT**

MADE IN FRANCE	50 / 60 Hz	START MINI	I max	Temperature (°C)					Capacity (Ah)		Ondulation/ Ripple	IP	Weight (kg)	Dimensions (L x W x H cm)		
				25°C @ 100%	40°C @ 100%	50°C @ 100%	60°C @ 100%	Pb	LFP							
GYSFLASH 18.12 PL-E	230V	12V	300W	2V	18A	18A	16A	14A	12.5A	36 > 270 Ah	18 > 270 Ah	<150 mV Rms	20	1.3 kg	21.5 x 17.5 x 7 cm	30 x 27 x 13 / 1.7
GYSFLASH 30.12 PL-E	230V	12V	500W	2V	30A	30A	27A	23A	18A	60 > 400 Ah	30 > 400 Ah	<150 mV Rms	20	1.6 kg	21.5 x 8 x 17.5 cm	—
GYSFLASH 15.24 PL-E	230V	24V	500W	2V	15A	15A	13.5A	11.5A	9A	30 > 240 Ah	15 > 240 Ah	<150 mV Rms	20	1.6 kg	21.5 x 8 x 17.5 cm	29 x 13 x 27 / 2
GYSFLASH 8.48 PL-E	230V	48V	500W	2V	8A	8A	6A	4.5A	3.5A	15 > 160 Ah	8 > 160 Ah	<150 mV Rms	20	1.6 kg	21.5 x 8 x 17.5 cm	—



BSU

BATTERY SUPPORT UNIT


Battery support for:

- ✓ Diagnostics
- ✓ ECU programming
- ✓ ADAS recalibration

YouTube



PLAYLIST
GYSFLASH
PRO



10.5 cm

PFC POWER FACTOR CORRECTION

FV FLEXIBLE VOLTAGE



22 languages

- GB DK CZ
- FR FI PL
- DE TR SK
- NL HR UA
- ES GR
- PT HU
- IT CN simplified
- RU CN traditional
- SE JP


SC SMART COOLING TECHNOLOGY

100% DUST PROOF




SILENT

SMART 8 STEP

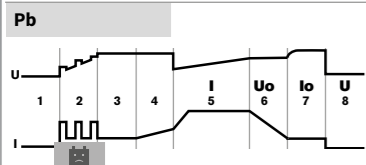

1. Status analysis
2. Recovery
3. Sulphation test
4. Desulfation
5. Fast charge 80%
6. Absorption
7. Refresh
8. Floating 100%

LiFePO₄ 7 steps



1. Status analysis
2. Recovery
3. Fast charge 90%
4. Absorption 95%
5. Completion
6. Equalization
7. Floating 100%

CHARGE

Pb AUTOMOTIVE

- ✓ GEL
- ✓ AGM
- ✓ LIQUID
- ✓ EASY
- ✓ EXPERT

Pb TRACTION

- ✓ GEL
- ✓ LIQUID

LITHIUM READY

- ✓ LFP/LiFePO₄

BSU

DIAG +




U2 ADJUSTABLE

SHOWROOM



CHANGE BATTERY



POWER SUPPLY



U2 & 12 max ADJUSTABLE



12 V

<p>GYSFLASH 30.12</p> <p>30 A</p> <p>PFC SC</p> <p>2,5 m - 6 mm²</p> <p>029224</p> <p>635,00 €HT</p>	<p>GYSFLASH 50.12 FV</p> <p>50 A</p> <p>PFC FV SC</p> <p>2,5 m - 10 mm²</p> <p>026056</p> <p>765,00 €HT</p>	<p>GYSFLASH 100.12</p> <p>100 A</p> <p>PFC SC</p> <p>2,5 m - 16 mm²</p> <p>029071 825,00 €HT</p> <p>029453</p> <p>5 m - 16 mm²</p> <p>029415 840,00 €HT</p> <p>029002</p> <p>082304</p>
--	---	---

6 / 12 / 24 V

<p>GYSFLASH 30.24</p> <p>30 A</p> <p>PFC SC</p> <p>2,5 m - 6 mm²</p> <p>029231</p> <p>635,00 €HT</p>	<p>GYSFLASH 50.24</p> <p>50 A</p> <p>PFC SC</p> <p>2,5 m - 10 mm²</p> <p>029095 757,00 €HT</p> <p>5 m - 10 mm²</p> <p>029620 817,00 €HT</p>
--	---

12 V

GYSFLASH 102.12

100 A

PFC SC

5 m - 16 mm²

029606 **920,00 €HT**

082311


INCLUDED

Fixing kit for Gysflash 102.12



ACCESSORIES p.38

MADE IN FRANCE	50 / 60 Hz	V L	mm ²	START MINI	I max	25°C @ 100%	40°C @ 100%	TRACTION BATTERIES	SHOWROOM CONNECT	IP	Weight	Dimensions	L x W x H cm / kg			
GYSFLASH 30.12	185 > 265V	2,5 m	6	12V	540W	2V	30 A	30 A	30 A	10 > 400 Ah	—	Ø M6	21	4.9 kg	25.5 x 10.5 x 23 cm	41.4 x 25 x 31.1 / 4.9
GYSFLASH 50.12 FV	85 > 265V	2,5 m	10	12V	850W	2V	50 A	50 A	40 A	10 > 600 Ah	—	Ø M6	21	6.6 kg	30 x 10.5 x 29 cm	40 x 24 x 30 / 6.6
GYSFLASH 100.12	185 > 265V	2,5 m / 5 m	16	12V	1600W	2V	100 A	75 A	66 A	20 > 1200 Ah	—	Ø M6	21	7.4 kg / 8.3 kg	32 x 10.5 x 29.2 cm	31 x 25 x 41 / 7.4
GYSFLASH 30.24	185 > 265V	2,5 m	6	6V / 12V / 24V	540W	2V	30 A	30 A	30 A	10 > 400 Ah	•	Ø M6	21	4.9 kg	25.5 x 10.5 x 23 cm	41.5 x 24.3 x 31 / 4.9
GYSFLASH 50.24	185 > 265V	2,5 m / 5 m	10	6V / 12V / 24V	1600W	2V	50 A	50 A	45 A	10 > 600 Ah	•	Ø M6	21	6.6 kg / 7.9 kg	30 x 10.5 x 29.2 cm	41 x 24.5 x 31 / 6.6
GYSFLASH 102.12	185 > 265V	5 m	16	12V	1600W	2V	100 A	75 A	66 A	20 > 1200 Ah	—	Ø M6	21	9.1 kg	12 x 34.5 x 29.5 cm	24 x 40 x 30 / 9.1



Download the page with prices



BSU

BATTERY SUPPORT UNIT

- Battery support for:
- ✓ Diagnostics
 - ✓ ECU programming
 - ✓ ADAS recalibration

CNT
Connected
Technology

FULLY CUSTOMIZABLE
p.34


FV FLEXIBLE VOLTAGE

85 V ← 265 V


PFC POWER FACTOR CORRECTION

16 V COMPATIBLE WITH 16V BATTERIES

- 22 languages**
- GB RU GR CN simplified
 - FR SE CZ CN traditional
 - DE DK PL JP
 - NL FI SK UA
 - ES TR HR
 - PT HU



12 V (factory preset)
16/24 V READY
Use custom configuration tool
(detail p.34)



GYSFLASH 51.12 CNT FV

50 A

PFC FV SC CNT

2,5 m - 10 mm²
068179



GYSFLASH 101.12 CNT FV

100 A

PFC FV SC CNT

2,5 m - 16 mm²
025790
5 m - 16 mm²
026988



12 V

GYSFLASH 121.12 CNT FV

120 A

PFC FV CNT

5 m - 25 mm²
026971
UK: 027756 US: 071605 AU: 082298
no accessories
JP: 027923



GYSFLASH 125.12 CNT FV

120 A 120 A @ 100%

PFC FV CNT

5 m - 25 mm²
028883
AU: 082274



6 / 12 / 16 / 24 V

GYSFLASH 101.24 CNT FV

100 A

PFC FV CNT

16 V ✓
5 m - 25 mm²
025967



6 / 12 / 16 / 24 / 36 / 48 V

GYSFLASH 51.48 CNT FV

50 A

PFC FV CNT

16 V ✓
5 m - 10 mm²
072015



SC

SMART COOLING TECHNOLOGY

100% DUST PROOF

SILENT

SMART 9 STEP

Pb

- Status analysis
- Recovery
- Sulphation test
- Desulfation
- Fast charge 80%
- Absorption
- Test Absorption
- Refresh
- Floating 100%

LiFePO₄

- Status analysis
- UVP Wake Up
- Recovery 90%
- Fast charge 90%
- Absorption 95%
- Test
- Completion
- Equalization
- Floating 100%

UVP Wake up (Under Voltage Protection). Battery reactivation when in UVP protection

Equalizing Balancing System 100% Perfect charge

CHARGE (150 CURVE CAPACITY)

Pb AUTOMOTIVE

- ✓ GEL
- ✓ AGM
- ✓ LIQUID
- ✓ EASY
- ✓ NORMAL
- ✓ BOOST
- ✓ RECOVERY+
- ✓ and more

Pb TRACTION

- ✓ GEL
- ✓ LIQUID
- ✓ and more

LITHIUM

- ✓ LFP/LiFePO₄
- ✓ LI-ION STD
- ✓ LFP CELL+
- ✓ LI-ION CELL+
- ✓ and more

BSU (10 CURVE CAPACITY)

DIAG +

SHOWROOM

CHANGE BATTERY

POWER SUPPLY

AND MORE

TEST

- ✓ VOLTAGE
- ✓ START UP
- ✓ ALTERNATOR

STARTER

- ✓ START

CNT

Connected Modules & Technology
p.36

MADE IN FRANCE	50/60 Hz	mm ²	START MINI	I max	25°C @100%	40°C @100%	TRACTION BATTERIES	SHOWROOM CONNECT	IP	kg	L x W x H cm / kg				
GYSFLASH 51.12 CNT FV	85 > 265 V	2,5 m	10	12V / 24V	850 W	1 V	50 A / 25 A	50 A / 25 A	40 A / 20 A	10 > 600 Ah / 10 > 300 Ah	•	Ø M6	41	6.8 kg	30 x 10.5 x 29 cm / 38.5 x 22 x 40.5 / 6.8
GYSFLASH 101.12 CNT FV	85 > 265 V	2,5 m / 5 m	16	12V	1600 W	1 V	110 V: 100 A / 230 V: 100 A	50 A / 75 A	50 A / 66 A	20 > 1200 Ah	•	Ø M6	21	7.5 kg / 8.3 kg	32 x 10.5 x 29.2 cm / 35.5 x 23 x 35 / 8.6
GYSFLASH 121.12 CNT FV	85 > 265 V	5 m	25	12V	2000 W	1 V	110 V: 100 A / 230 V: 120 A	75 A / 110 A	55 A / 90 A	20 > 1500 Ah	•	Ø M6	20	10.4 kg	31 x 13 x 26 cm / 35.5 x 23 x 35 / 10.4
GYSFLASH 125.12 CNT FV	85 > 265 V	5 m	25	12V	2000 W	1 V	110 V: 100 A / 230 V: 120 A	100 A / 120 A	77 A / 116 A	20 > 1500 Ah	•	Ø M6	40	10.9 kg	31 x 13 x 26 cm / 38.5 x 22 x 40.5 / 10.9
GYSFLASH 101.24 CNT FV	85 > 265 V	5 m	25	6/12V / 24V	3200 W	1 V	110 V: 100 A / 230 V: 100 A	72 A / 89 A	47 A / 68 A	20 > 1200 Ah	•	Ø M6	20	10.6 kg	31 x 13 x 26 cm / 38.5 x 22 x 40.5 / 10.6
GYSFLASH 51.48 CNT FV	85 > 265 V	5 m	10	6/12/24V / 36/48V	3200 W	1 V	110 V: 50 A / 230 V: 50 A	44 A / 49 A	21 A / 39 A	10 > 600 Ah	•	Ø M6	20	9 kg	31 x 13 x 26 cm / 41 x 22 x 38.5 / 9






BSU

BATTERY SUPPORT UNIT

- Battery support for:
- ✓ Diagnostics
 - ✓ ECU programming
 - ✓ ADAS recalibration

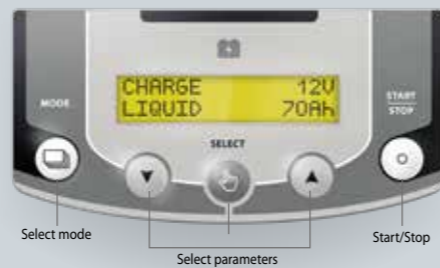

22 languages

- | | | | | | | | |
|----|----|----|----|----|----|----|----------------|
| GB | NL | IT | DK | HR | PL | UA | CN simplified |
| FR | ES | RU | FI | GR | SK | | CN traditional |
| DE | PT | SE | TR | CZ | HU | | JP |

CNT
Connected
Technology
FULLY CUSTOMIZABLE
p.34

PFC POWER FACTOR CORRECTION

16 V COMPATIBLE WITH 16V BATTERIES

FV FLEXIBLE VOLTAGE
85 V ← 265 V


INCLUDED

Fixing kit



OPTIONS

Magnetfix 50
029637 105^{no}ert



GYSFLASH PRO vertical wall mounting kit
082694 27^{no}ert



12 V



6 / 12 / 16 / 24V



GYSFLASH 103.12 CNT FV

100 A

PFC FV SC CNT

5 m - 16 mm²
072008



GYSFLASH 123.12 CNT FV

120 A

PFC FV CNT

5 m - 25 mm²
025677



GYSFLASH 53.24 CNT FV

50 A

PFC FV CNT SC 16 V

5 m - 10 mm²
082540



GYSFLASH 103.24 CNT FV

100 A

PFC FV CNT 16 V

5 m - 25 mm²
025684



Download the page with prices



SC

SMART COOLING TECHNOLOGY


100% DUST PROOF



SILENT



SMART 9 STEP

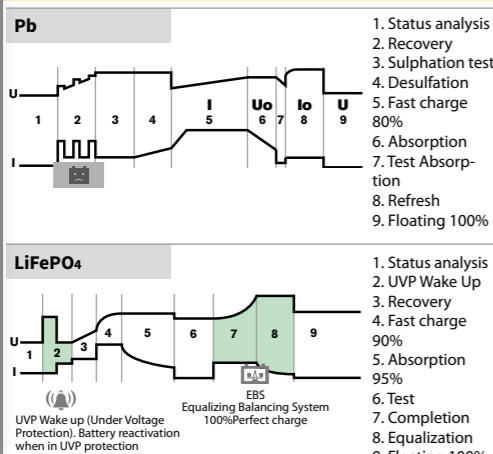

CHARGE (150 CURVE CAPACITY)

- Pb AUTOMOTIVE**
- ✓ GEL
 - ✓ AGM
 - ✓ LIQUID
 - ✓ EASY
 - ✓ NORMAL
 - ✓ BOOST
 - ✓ RECOVERY+
 - ✓ and more
- Pb TRACTION**
- ✓ GEL
 - ✓ LIQUID
 - ✓ and more
- LITHIUM**
- ✓ LFP/LiFePO₄
 - ✓ LI-ION STD
 - ✓ LFP CELL+
 - ✓ LI-ION CELL+
 - ✓ and more

BSU (10 CURVE CAPACITY)

- DIAG +**
- SHOWROOM**
- CHANGE BATTERY**
- POWER SUPPLY**
- AND MORE**
- ✓ TEST
 - ✓ VOLTAGE
 - ✓ START UP
 - ✓ ALTERNATOR
 - ✓ STARTER
 - ✓ START

CNT

- Connected Modules & Technology**
p.36
-

MADE IN FRANCE	50/60 Hz	mm ²	START MINI	I max	25°C @ 100%	40°C @ 100%	TRACTION BATTERIES	SHOWROOM CONNECT	IP	Weight	L x W x H cm / kg				
GYSFLASH 103.12 CNT FV	85 > 265 V	5 m	12 V	1600 W	1 V	110 V : 100 A	50 A	50 A	20 > 1200 Ah	—	Ø M6	21	8,2 kg	34,5 × 29,5 × 12 cm	41 × 38,5 × 22 / 9,2
						230 V : 100 A	75 A	66 A							
GYSFLASH 123.12 CNT FV	85 > 265 V	5 m	12 V	2000 W	1 V	110 V : 100 A	100 A	85 A	20 > 1200 Ah	•	Ø M6	30	11 kg	34 × 25 × 15 cm	35,5 × 23,5 × 35 / 11
						230 V : 50 A	120 A	120 A							
GYSFLASH 53.24 CNT FV	85 > 265 V	5 m	6/12 V	1600 W	1 V	50 A	110 V : 40 A	110 V : 27 A	10 > 600 Ah	•	Ø M6	21	5,8 kg	33,5 × 11 × 27 cm	41 × 38,5 × 22 / 11
			24 V			110 V : 25 A	110 V : 27 A	110 V : 22 A							
GYSFLASH 103.24 CNT FV	85 > 265 V	5 m	6/12 V	3200 W	1 V	110 V : 100 A	100 A	68 A	20 > 1200 Ah	•	Ø M6	30	11 kg	34 × 25 × 15 cm	35 × 23 × 37 / 11
			24 V			230 V : 100 A	100 A	79 A							



GYSFLASH PRO CNT

BSU

BATTERY SUPPORT UNIT

Battery support for:

- ✓ Diagnostics
- ✓ ECU programming
- ✓ ADAS recalibration

CNT
Connected
Technology

FULLY CUSTOMIZABLE
p.34

FV FLEXIBLE VOLTAGE

85 V ← 265 V

PFC POWER FACTOR CORRECTION

16 V COMPATIBLE WITH 16V BATTERIES



22 languages

- | | | | | | | | |
|----|----|----|----|----|----|----|----------------|
| GB | NL | IT | DK | HR | PL | UA | CN simplified |
| FR | ES | RU | FI | GR | SK | | CN traditional |
| DE | PT | SE | TR | CZ | HU | | JP |

TRACTION



27

GYSFLASH PRO CNT

BATTERY SUPPORT UNIT



NEW
01 2025

19 languages

- | | |
|----|----|
| GB | FI |
| FR | TR |
| DE | HR |
| NL | GR |
| ES | CZ |
| PT | PL |
| HU | SK |
| IT | UA |
| RU | |
| SE | |
| DK | |

6 / 12 / 16 / 24 V

GYSFLASH 107.24 CNT FV

100 A

PFC FV CNT 16 V

5 m - 25 mm²
082939



INCLUDED

Fixing kit



OPTIONS

Magnetfix 50



GYSFLASH PRO vertical wall mounting kit



6 / 12 / 16 / 24 / 36 / 48 V

GYSFLASH 25.48 CNT FV

25 A

PFC SC FV CNT 16 V

5 m - 10 mm²
075962



GYSFLASH 53.48 CNT FV

50 A

PFC FV CNT 16 V

5 m - 10 mm²
025998



Download the page with prices



SC

SMART COOLING TECHNOLOGY

100% DUST PROOF

SILENT

SMART 9 STEP

Pb

- Status analysis
- Recovery
- Sulphation test
- Desulfation
- Fast charge 80%
- Absorption
- Test Absorption
- Refresh
- Floating 100%

LiFePO₄

- Status analysis
- UVP Wake Up
- Recovery
- Fast charge 90%
- Absorption 95%
- Test
- Completion
- Equalization
- Floating 100%

UVP Wake up (Under Voltage Protection). Battery reactivation when in UVP protection

Equalizing Balancing System 100% Perfect charge

CHARGE (150 CURVE CAPACITY)

Pb AUTOMOTIVE

- ✓ GEL
- ✓ AGM
- ✓ LIQUID
- ✓ EASY
- ✓ NORMAL
- ✓ BOOST
- ✓ RECOVERY+
- ✓ and more

Pb TRACTION

- ✓ GEL
- ✓ LIQUID
- ✓ and more

LITHIUM

- ✓ LFP/LiFePO₄
- ✓ LI-ION STD
- ✓ LFP CELL+
- ✓ LI-ION CELL+
- ✓ and more

BSU (10 CURVE CAPACITY)

DIAG +

SHOWROOM

CHANGE BATTERY

POWER SUPPLY

AND MORE

TEST

- ✓ VOLTAGE
- ✓ START UP
- ✓ ALTERNATOR

STARTER

- ✓ START

CNT

Connected Modules & Technology p.36

MADE IN FRANCE	50 / 60 Hz	V	mm ²	START MINI	I max	25°C @ 100%	40°C @ 100%	TRACTION BATTERIES	SHOWROOM CONNECT	IP	kg	L x W x H cm	kg
GYSFLASH 107.24 CNT FV	85 - 265 V	5 m	25	3200 W	1 V	110 V : 100 A	100 A	68 A	•	0 M6	30	34 × 25 × 15 cm	35 × 23 × 37 / 11
						230 V : 100 A	100 A	79 A					
GYSFLASH 25.48 CNT FV	100 - 127 V	5 m	10	800 W	1 V	110 V : 12 A	19 A	12 A	•	0 M6	21	12 × 34.5 × 29.5 cm	40.5 × 38 × 22.5 / 8.8
						230 V : 25 A	13 A	10 A					
GYSFLASH 53.48 CNT FV	85 - 265 V	5 m	10	800 W	1 V	110 V : 50 A	50 A	28 A	•	0 M6	30	34 × 25 × 15 cm	40 × 39 × 23 / 9.5
						230 V : 50 A	26 A	20 A					



BSU BATTERY SUPPORT UNIT & STARTER

CNT Connected Technology


- Battery support for:
- ✓ Diagnostics
 - ✓ ECU programming
 - ✓ ADAS recalibration

SPECIAL PROJECTS

Contact us for special projects.
Quick Customization:
Modes, Curves, parameters...

22 languages

- GB RU GR CN simplified
- FR SE CZ CN traditional
- DE DK PL JP
- NL FI SK
- ES TR UA
- PT HR
- IT HU

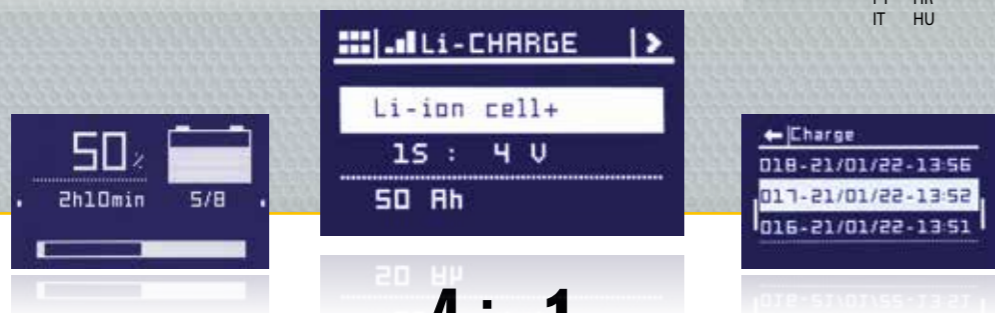

4 in 1

AUTOMATIC CHARGE

Pb AUTOMOTIVE

- ✓ GEL
- ✓ AGM
- ✓ LIQUID
- ✓ EASY
- ✓ EXPERT
- ✓ NORMAL
- ✓ BOOST
- ✓ RECOVERY+

Pb TRACTION

- ✓ GEL
- ✓ LIQUID

LITHIUM READY

- ✓ LFP/LiFePO₄
- ✓ LI-ION STD
- ✓ LFP CELL+
- ✓ LI-ION CELL+

BSU

DIAG +



SHOWROOM



CHANGE BATTERY



POWER SUPPLY



AUTOMATIC STARTER

- ✓ START

TEST

- ✓ VOLTAGE
- ✓ START UP
- ✓ ALTERNATOR

- FULL PROTECTION**
- On-board electronics
 - Over voltage
 - No sparks

- UNIVERSAL MODE
- AUTO SELECTION
- SULFATED BATTERIES
- ALL BATTERIES
- >1V


PFC POWER FACTOR CORRECTION
185 V ← 265 V

1 WORLD FIRST



CNT Connected Technology


SOFTWARE UPDATE

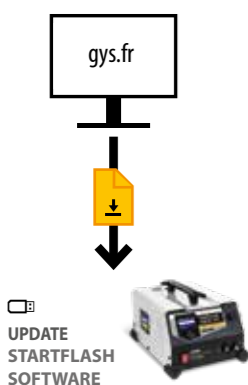

CUSTOMIZATION





TRACEABILITY

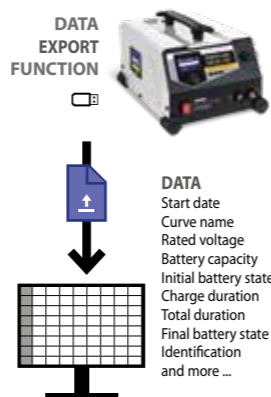

Connected Modules & Technology p.36



SMART 9 STEP

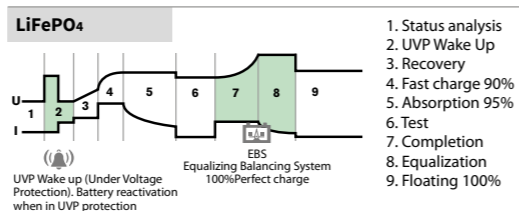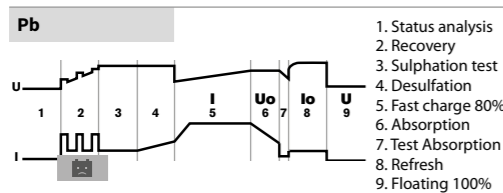

OPTION

Trolley 074965 510,00 €HT



6/12/16/24V

STARTFLASH 120.24 CNT

2 > 300 A

5 m - 35 mm² 700 A

073616

STARTER RECOMMENDATION	6V	12V	24V	10 > 180 Ah	180 > 250 Ah

MADE IN FRANCE	50 / 60 Hz	CHARGE	START MINI	I max	25°C @100%	40°C @100%	TRACTION BATTERIES	START	1V/C	0V/C	AUTO START	IP	LxWxH cm / kg	LxWxH cm / kg	
STARTFLASH 120.24 CNT	85 > 265 V	6/12/24V	3500W	2V	110V: 100A	75 A	55 A	•	6/12/24V	150 A	150 A	•	20	49 x 37.5 x 30.5 / 14	41.5 x 32.5 x 25.5 / 18.5
					230V: 120 A	110 A	90 A		6V:	300 A	300 A				
									12V:	300 A	300 A				

Download the page with prices





BSU BATTERY SUPPORT UNIT


CNT Connected Technology



YouTube VIDEO EQUALIZE MODE



BATTERY BALANCING

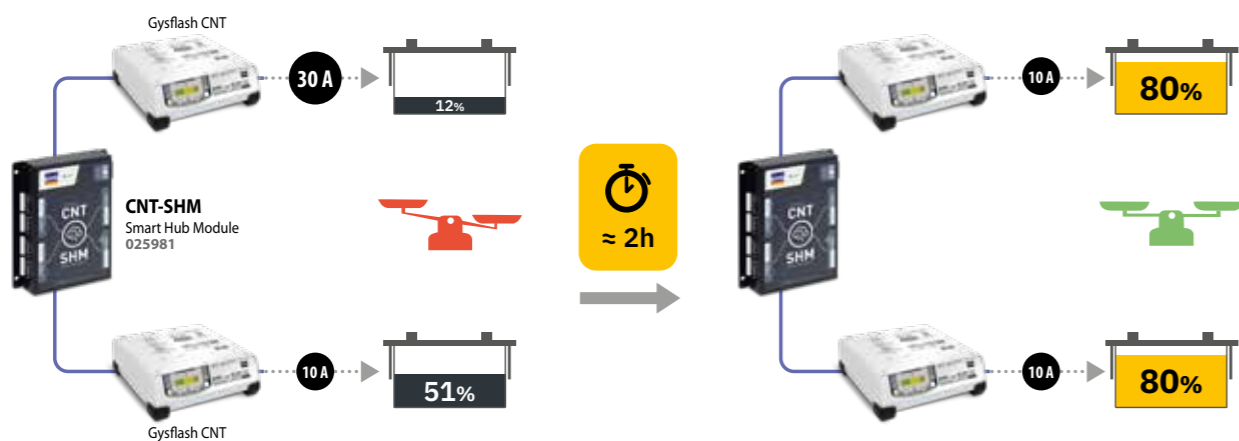

BENEFITS



- Increased reliability
- Healthy batteries
- Waste reduction

EQUALIZATION & BSU

Use all your BSU modes while balancing the batteries

- DIAG + U2 ADJUSTABLE
- SHOWROOM
- CHANGE BATTERY
- POWER SUPPLY U2 & I2 max ADJUSTABLE
- AND MORE

SMART 9 STEP CHARGE

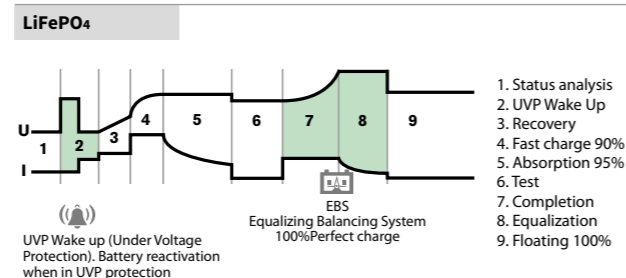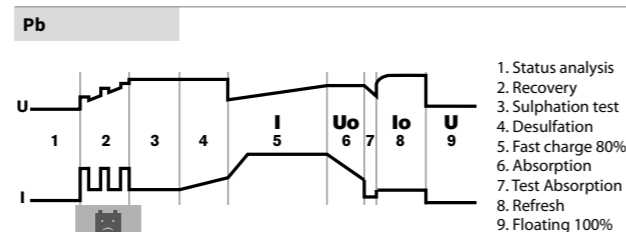

GYSFLASH EQUALIZE PACKS



NEW 01 2025

EQUALIZE (2 × 12 V CHARGERS)



Gysflash 101.12 CNT FV 026988 12 V



Gysflash 101.12 CNT FV 026988 12 V



CNT SHM 025981



SMC Cable (1m) 056596



BSU Flash Plus 085510

pack EQUALIZE 1 085534 2 229,50 €HT

pack EQUALIZE 2 085534 2 229,50 €HT

EQUALIZE (2 × 24 V CHARGERS)



Gysflash 101.24 CNT FV 025967 24 V



Gysflash 101.24 CNT FV 025967 24 V



CNT SHM 025981



SMC Cable (1m) 056596



BSU Flash Plus 085510

pack EQUALIZE 3 085558 2 739,50 €HT

pack EQUALIZE 4 085565 3 184,50 €HT

Download the page with prices



CNT

Connected Modules & Accessories p.36





BSU BATTERY SUPPORT UNIT

CNT
Connected
Technology
FULLY CUSTOMIZABLE
p.34

CAR MANUFACTURING



YouTube

PLAYLIST
CNT TECHNOLOGY


19 languages

- GB ES RU TR PL
- FR PT SE HR SK
- DE HU DK GR UA
- NL IT FI CZ




SPECIAL PROJECT - CONTACT US


AUTOMATIC BATTERY DETECTION & MODE SELECTION

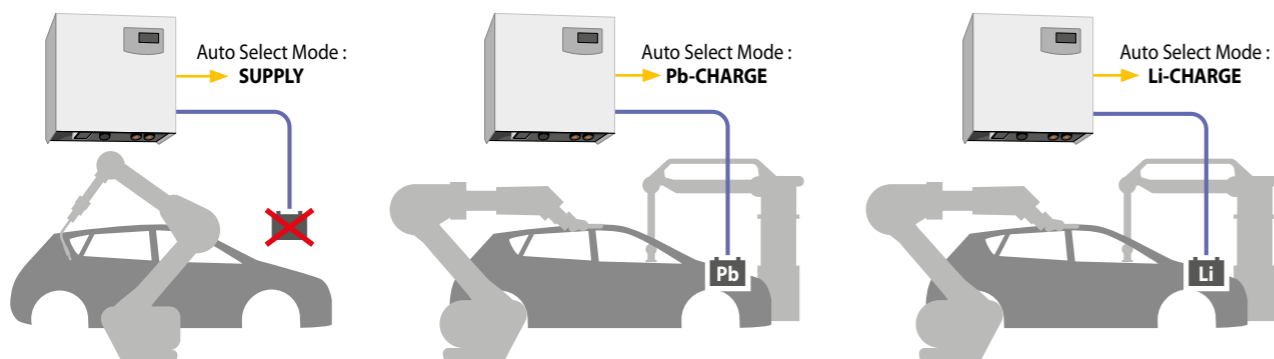

CONTROL VIA 1D/2D BARCODES

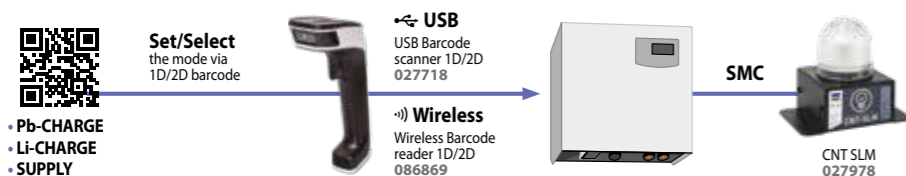

ADVANCED AUTOMATION

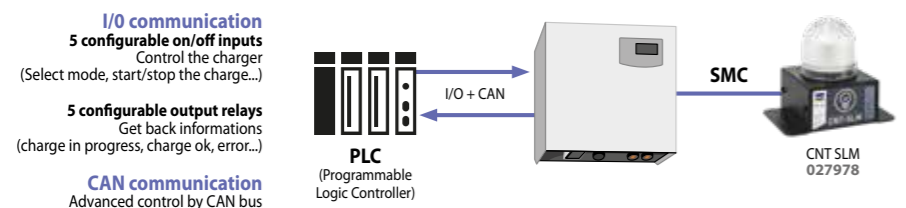

CHARGE (150 CURVE CAPACITY)

- Pb CHARGE**
- Li CHARGE**
- LEAD ACID
- LITHIUM
- and more
- and more

SUPPLY (10 CURVE CAPACITY)

- EPS (External Power Supply)**
- and more

POWER-UP

- LITHIUM REACTIVATION MODE

CONFIG DESIGNER MENU

Setting the charge curve from the Gysflash interface :

```

lead-acid n°001
U_esp 11.5 V
U_lade 14.8 V
I_lade 150.0 A
I_ehl 2.5 A
T_min 00:05:00
T_max 65:00:00
Q_max 250 Ah
T/Q_max error EHL
U_ehl 13.2 V
T_res 250:00:00
U_low 5.0 V
  
```

SECURE ACCESS

- Customizable manual accesses
- Configurable password

PFC POWER FACTOR CORRECTION


FV FLEXIBLE VOLTAGE
85 V ← 265 V

FV FLEXIBLE VOLTAGE
320V ← 520V

GYSFLASH 108.12 CNT FV
GYSFLASH 148.12 CNT FV

GYSFLASH 158.12 CNT FV

NEW 01 2025

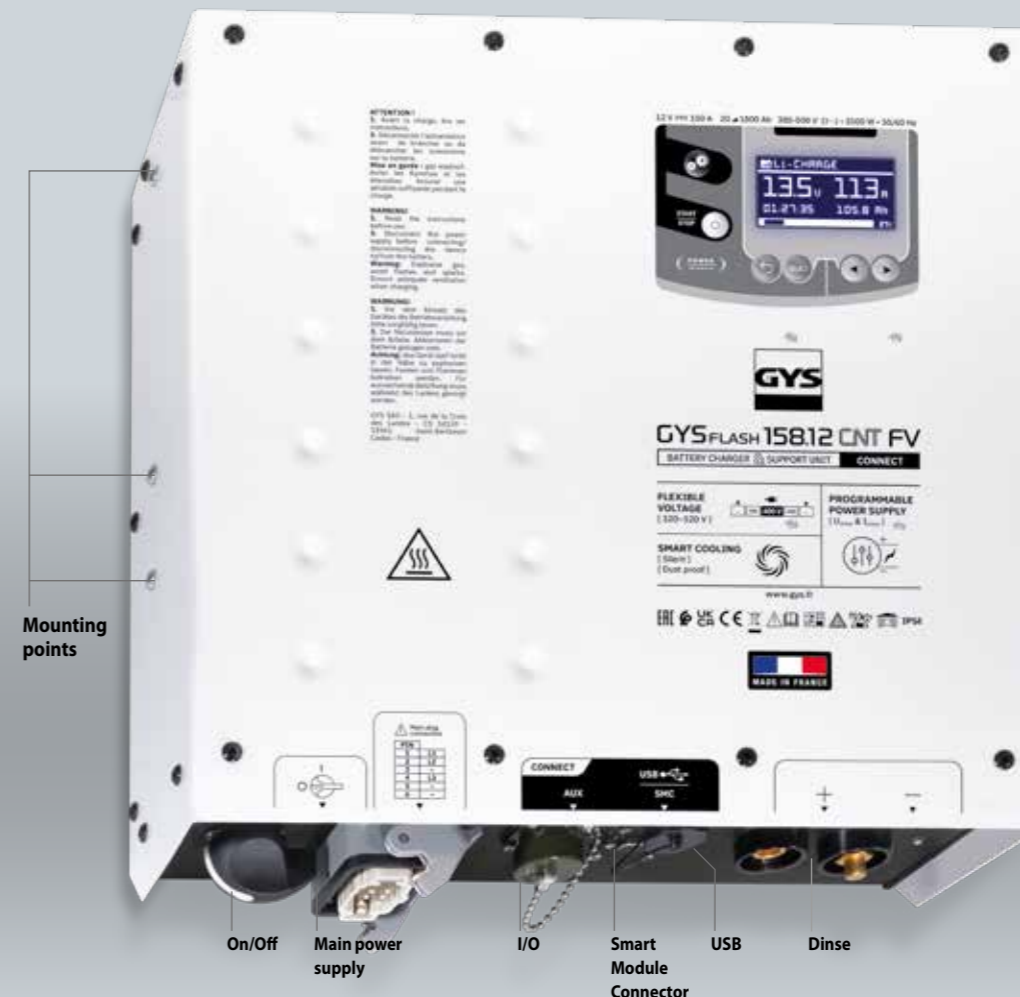

ACCESSORIES p.39

SCREW CONNECTOR available on request



12 V

NEW 01 2025

105 A 1~

PFC SC FV CNT

no accessories
085602

NEW 01 2025

145 A 1~

PFC SC FV CNT

no accessories
069916

NEW 01 2025

150 A 3~

SC FV CNT

no accessories
069909

Download the page with prices




MADE IN FRANCE	50 / 60 Hz			START MINI	I _{max}	25°C @ 100%	40°C @ 100%	60°C @ 100%		IP		
GYSFLASH 108.12 CNT FV	85 - 265V	12V	1800W	1V	110V : 65 A 230V : 105 A	65 A 105 A	65 A 105 A	62 A 88 A	20 · 700 Ah 20 · 1200 Ah	54	9.4 kg	37.6 × 14.5 × 29.6 cm
GYSFLASH 148.12 CNT FV	85 - 265V	12V	2500W	1V	110V : 100 A 230V : 145 A	100 A 134 A	90 A 116 A	62 A 88 A	20 · 1200 Ah 20 · 1800 Ah	54	9.4 kg	37.6 × 14.5 × 29.6 cm
GYSFLASH 158.12 CNT FV	320 - 520V	12V	2500W	1V	150 A	140 A	120 A	100 A	20 · 1800 Ah	54	10.3 kg	37.6 × 14.5 × 38 cm




BSU BATTERY SUPPORT UNIT

CNT Connected Technology

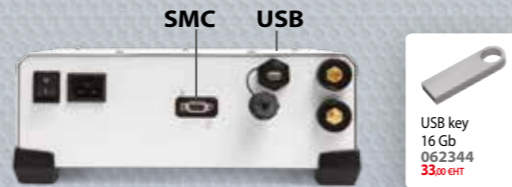

USB key
16 Gb
062344
33000HT

SOFTWARE UPDATE LIFETIME EVOLUTION

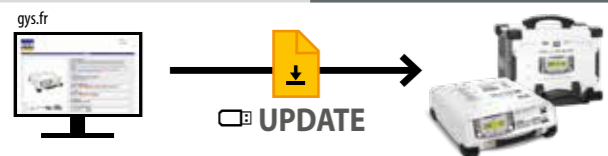

TRACEABILITY CHARGING DATA



DESIGN YOUR CHARGING CURVE PRODUCT CONFIGURATION


CNT MANAGER (gys.fr)

- GYSFLASH parameters
- Custom curves
- Multi-unit management
- Import/export configurations
- ...



Full customisation

Create your personalised configuration

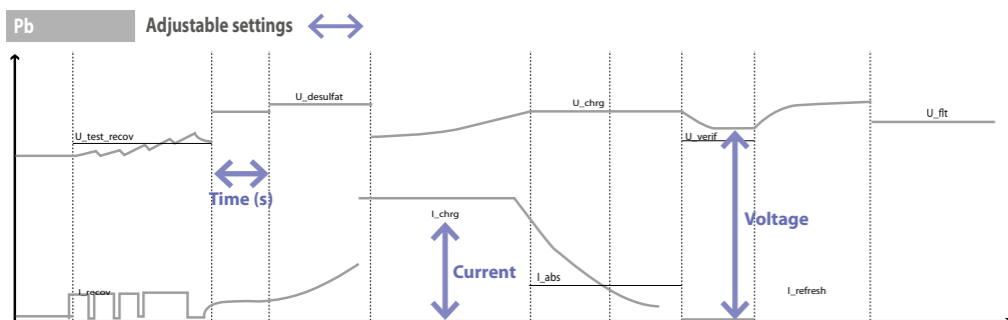

Adjust your unit to best suit your application

	LEAD-ACID - PB	Lithium - LFP	Lithium - Li-ion std
CELL VOLTAGE (20% - 100%)	2.0V/cell – 2.15 V/cell	3.2V/cell – 3.6 V/cell	3.5 V/cell – 4.2 V/cell
CHARGING VOLTAGE	2.33 V/cell – 2.47 V/cell	3.6 V/cell	4.2 V/cell
Gysflash xx.12 CNT	1 S* – 6 S	1 S – 4 S	1 S – 3 S
Gysflash xx.24 CNT	1 S – 12 S	1 S – 8 S	1 S – 7 S
Gysflash xx.48 CNT	1 S – 24 S	1 S – 16 S	1 S – 14 S

*S = Battery serial cells

Download one of our GYS configuration

Configuration file (gys.fr)	Applications	CHARGE MODE										POWER MODE				MISCELLANEOUS				
		Pb-CHARGE					LI-CHARGE			TRACTION		SHOWROOM	CHANGE BAT.	STARTER MODE	POWER SUPPLY	LI-SUPPLY/LFP	LI-SUPPLY/Li-ion	TESTER MODE		
		normal	AGM	liquid	Easy	Boost	Recovery + Ca / Ca recov	LFP/LiFePO4	Li-ion std	LFP cell+	Li-ion cell+								liquid	gel
1_gys_original.gfc	Initial configuration of the charger	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
2_car_extended.gfc	Extensive features for garages	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
3_showroom_only.gfc	Simplified version for dealerships and demonstration vehicles												✓							
4_pro_lithium.gfc	Professional of lithium battery											✓	✓	✓	✓					
5_traction.gfc	Forklift truck, electric pallet truck, stacker...																	✓	✓	
6_full_version.gfc	Full version	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓



Contact us for special projects.

Quick Customization:
Modes, Curves, parameters...

MODULES MAXIMUM VERSATILITY

SINGLE MODULE





MULTI MODULES




ADVANCED




MULTI-MODULES GROUPS

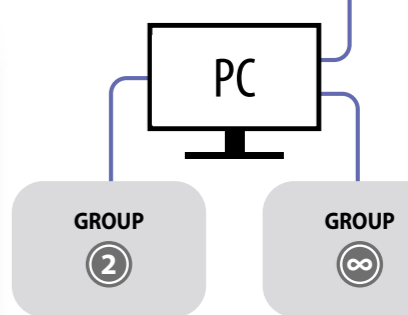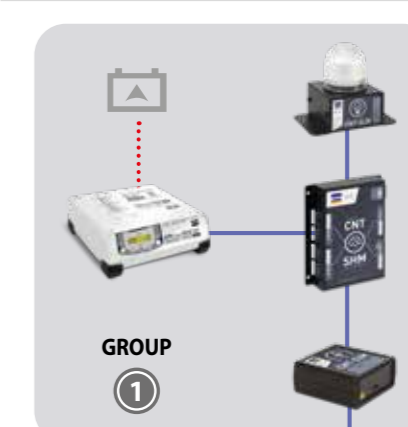

PARALLEL CHARGING EXAMPLE : GYSFLASH 101.12 CNT (X4)

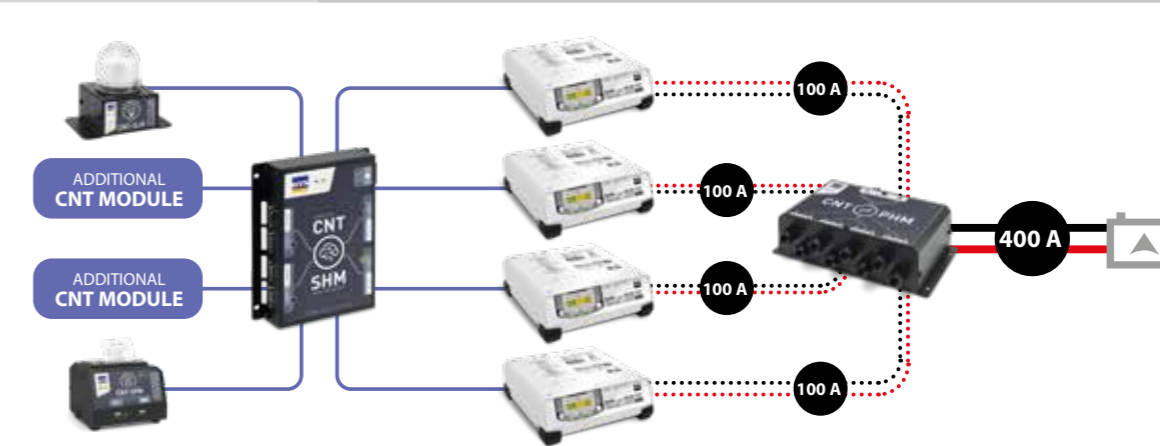

PORTABLE BSU

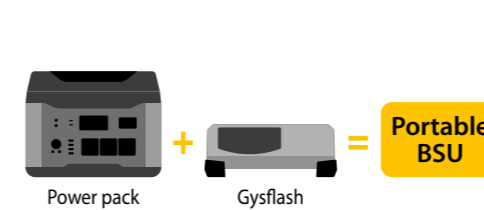

USAGE DURATION Power pack + Gysflash	GYSFLASH			
	30.12 30.24	50.12 51.12	100.12 / 102.12 101.12 / 103.12 50.24 / 53.24 25.48	121.12 123.12 125.12
POWER PACK 520	1 h 10	—	—	—
POWER PACK 1300	2 h 50	1 h 40	—	—
POWER PACK 14.22	3 h 10	1 h 50	1 h	45 min
POWER PACK 14.15 FC	3 h 10	1 h 50	1 h	—



Download the page with prices





CNT TECHNOLOGY MODULES

CNT Connected Technology

SMC CABLE


1 m
056596
11,50 € HT

3 m
025691
14,00 € HT



YouTube
PLAYLIST
CNT TECHNOLOGY

COMING SOON



SCAN

CRIT'AIR



Customer data



Battery data



Charge data



USB Barcode scanner

1D/2D

027718



USB direct connection



Wireless Barcode reader

1D/2D

086869



Wireless



NEW
01 2025

Download Brochure
Télécharger la brochure



OPTIONS

Support Barcode scanner
025745 20,00 € HT



LIGHT & SOUND




Scratch mounted

CNT-SLM Smart Light Module 027978



65dB

↳ 12.6 × 14.6 × 9.3 cm / 560g
☞ 23 × 17 × 13 cm / 840g



Pb charge
Lithium charge
OK
Error

OPTIONS

SLM/SPM support
028906 27,00 € HT



PRINT



Magnetic mounting

CNT-SPM Smart Printer Module 026919

↳ 14 × 10.5 × 13.3 cm / 1.4 kg
☞ 23 × 17 × 13 cm / 1.9 kg



Customizable receipt

Included
SMC Cable - 1 m
056596 11,50 € HT



Standard roller x2
57mm x 7.5 m, Ø 25 mm
056633 3,20 € HT

OPTIONS

SLM/SPM support
028906 27,00 € HT

USB Keyboard

AZERTY 027725 36,00 € HT
QWERTY 027770 37,00 € HT

QWERTY compatibility

BSU SMART COMMUNICATION




CNT-SUM Smart USB Module 025974

USB micro A

↳ 6.9 × 6.8 × 2.9 cm / 85g
☞ 28.5 × 11 × 11.5 cm / 380g


Computer / Diag System



Included
SMC Cable - 1 m
056596 11,50 € HT



Computer connection




CNT-SWM Smart Wireless Module 070837

Bluetooth LE Wifi

↳ 6.9 × 6.8 × 2.9 cm / 85g
☞ 27.6 × 9.6 × 9.6 cm / 440g

Computer / Diag System



Included
SMC Cable - 1 m
056596 11,50 € HT



SMART HUB MODULE




CNT-SHM Smart Hub Module 025981

↳ 22 × 18 × 4.5 cm / 1 kg
☞ 16.4 × 13.4 × 24 cm / 1.7 kg

Included
SMC Cable
1 m
056596 11,50 € HT



UP TO 4 MODULES + 4 GYSFLASH

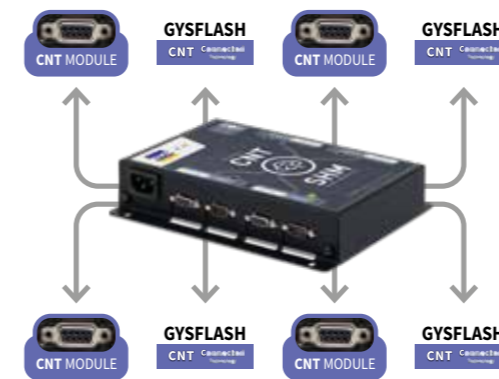

POWER HUB MODULE



CNT-PHM Power Hub Module 056589

↳ 31.7 × 24.5 × 9 cm / 2.7 kg
☞ 32 × 29 × 13.5 cm / 3.2 kg

Included
M6 KIT



4 GYSFLASH IN Ø Cables: 10 → 25 mm²



OUT
Ø Cables: 25 → 70 mm²

Download the page with prices





SUPPORTS



BSU Flash XL
028890 415.00 € HT



ALL GYSFLASH
- COMPATIBILITY -
Vertical & Horizontal

TROLLEYS

BSU Flash XL
028890 415.00 € HT



robust tyres

NEW
01 2025

BSU Flash Plus
085510 445.00 € HT

OPTION Protective cover
062733 159.00 € HT



OPTION Cable support
052284 106.00 € HT



Battery charging rack
Rack de charge
Ladeständer
079595 510.00 € HT




Heavy-duty case
Valise de chantier
Hartschalenkoffer
060432 159.00 € HT



WALL SUPPORT


Magnetfix 50
029637 105.00 € HT

✓ for vertical Gysflash



GYSFLASH PRO vertical wall mounting kit
082694 27.00 € HT

✓ for vertical Gysflash



Wall support
Tablette
Wandhalterung
055513 72.00 € HT

↳ 21 x 43 x 57 cm / 3.9 kg
☞ 36 x 43 x 20 cm / 3.3 kg

✓ for horizontal Gysflash



STANDARD ACCESSORIES

Anderson Cables	for GYSFLASH	
	32.12 PL / 30.12 / 50.12 51.12 / 30.24 / 50.24 / 53.24 25.48 / 51.48 / 53.48	100.12 / 101.12 102.12 / 103.12
Anderson / Clamps		
2.5 m - 10 mm ² 085800 59.00 € HT	✓	—
2.5 m - 16 mm ² 056503 85.00 € HT	✓	—
5 m - 16 mm ² 054615 123.00 € HT	✓	✓
8 m - 16 mm ² 056572 161.00 € HT	✓	✓
Anderson / NATO		
5 m - 16 mm ² 026810 279.00 € HT	✓	✓
Anderson / Rema 160 A		
5 m - 16 mm ² 069091 189.00 € HT	✓	✓
Anderson / Anderson 175 A		
5 m - 16 mm ² 069107 128.00 € HT	✓	✓
Anderson / Texas		
0.2 m - 16 mm ² 055902 27.00 € HT	✓	✓
1 m - 16 mm ² 028791 76.00 € HT	✓	✓

Texas Cables	for GYSFLASH	
	121.12 / 123.12 / 125.12 108.12 / 148.12 / 158.12 101.24 / 103.24 / 107.24	
Texas / Clamps		
2.5 m - 25 mm ² 028876 120.00 € HT	✓	—
5 m - 25 mm ² 027886 173.00 € HT	✓	—
Texas / Rema 160 A		
5 m - 25 mm ² 025714 229.00 € HT	✓	—
Texas / Anderson 175 A		
5 m - 25 mm ² 025721 193.00 € HT	✓	—
Texas / NATO		
5 m - 25 mm ² 025707 306.00 € HT	✓	—
10 m - 25 mm ² 056626 499.00 € HT	✓	—

PARALLEL CABLES KIT 072954




Anderson/Cable lugs M6 x2 16 mm² - 1 m
Cable lugs/Cable lugs M6 x2 (1 red + 1 black) 35 mm² - 5 m
Texas/Cable lugs M6 x2 25 mm² 1 m
M6 KIT Ø16 (x4) Ø25 (x4) Ø35 (x4)
SMC Cable 1 m

INTERNAL FUSES



40 A for GYSFLASH 30 054646 10.00 € HT
x2
125 A for GYSFLASH 100, 101, 102 054585 6.00 € HT
x2
150 A for GYSFLASH 121, 123, 103 027930 3.00 € HT
x2

EXTERNAL FUSES



6.3 A for GYSFLASH 30 054578 3.00 € HT
x5
10 A for GYSFLASH 40, 50 100, 101, 102 056527 3.00 € HT

CONNECTORS



NATO 026780 99.00 € HT
USB key 16 Go/GB 062344 33.00 € HT

GYSFLASH CNT PACKS



SINGLE GYSFLASH	101.12 CNT	121.12 CNT	101.24 CNT	CNT-SPM + paper roll + support	Barcode Scanner + support	BSU Flash XL	CNT SLM	CNT SHM	CNT PHM	Parallel cable kit
pack GYSFLASH CNT 1 068117	✓	—	—	✓	✓	✓ QWERTY	✓	—	—	—
pack GYSFLASH CNT 2 068124	✓	—	—	✓	✓	✓ AZERTY	✓	—	—	—
pack GYSFLASH CNT 3 068131	—	✓	—	✓	✓	✓ QWERTY	✓	—	—	—
pack GYSFLASH CNT 4 068148	—	✓	—	✓	✓	✓ AZERTY	✓	—	—	—
DOUBLE GYSFLASH										
pack GYSFLASH CNT 5 072978	✓ x2	—	—	✓	✓	✓ AZERTY	✓	✓	✓	✓
pack GYSFLASH CNT 6 074972	✓ x2	—	—	✓	✓	✓ QWERTY	✓	✓	✓	✓
WITHOUT GYSFLASH										
pack Parallel Charging 072961	—	—	—	—	—	—	—	✓	✓	✓
pack GYSFLASH PRO 1 079908 1393.00 € HT	—	—	—	✓	✓	✓ AZERTY	✓	✓	✓	—
pack GYSFLASH PRO 2 079915 1394.00 € HT	—	—	—	✓	✓	✓ QWERTY	✓	✓	✓	—



Download the page with prices



CHARGERS

ARTIC

IP 65

WATER PROTECTION
ARTIC 1500, 4000 & 8000

CHARGERS ONLY



SSM

Save and load settings.
Automatic restart in case of power cut.

Mémorisation des réglages.
Redémarrage automatique en cas de coupure électrique.

Einstellungsspeicherung.
Automatisches Starten nach einem Netzausfall.

START STOP

Start/stop Engine :
Compatible with Start/Stop vehicles.

Compatible véhicules Start/Stop.
Geeignet für START-STOP-Fahrzeuge.

Cold charge

"Cold charge" mode:
performance-enhancing charging mode for cold or freezing weather conditions.

Mode "Cold charge":
optimisation des performances en cas de temps froid ou de gel.

-Cold Charge--Modus:
Leistungsoptimierung bei kaltem Wetter oder bei Frost.



AUTOMATIC SMART HF INVERTER



ARTIC 800

12V 0.8A GO > 7V



029569 27,50 €HT
☎: 029682



ARTIC 1500

12V 1.5A GO > 7V



029576 35,00 €HT



ARTIC 4000

6/12V 4/1-4A GO > 2V (6V)
GO > 7V (12V)



029583 58,00 €HT
☎: 029705



ARTIC 8000

2/8A 12V GO > 7V



029590 94,00 €HT
☎: 029712



ENERGY

PATENTS REGISTERED NUMBERS
001652090-0001
EUROPEAN TRADEMARK & DESIGN



12V • TRADITIONAL W

ENERGY 126

4A



023222 59,90 €HT
☎: 025165



Fuse X10
10A 054530 3,00 €HT
15A 054493 3,00 €HT

TCB

PATENTS REGISTERED NUMBERS
001652090-0001
EUROPEAN TRADEMARK & DESIGN



2 IN 1

CHARGE



TEST

12V • AUTOMATIC WU

TCB 60

2/4A GO > 3.5V



023253 78,80 €HT



TCB 90

2/5.5A GO > 3.5V



023260 92,00 €HT



TCB 120

3.5/7A GO > 3.5V



023284 96,00 €HT
☎: 025240



Download the page with prices



INCLUDED

all ARTIC

Eyelets /
Céillets /
Ösen
30 cm
026872 6,00 €HT



Clamps /
Pincers /
Klemmen
35 cm
026865
8,00 €HT



	50/60 Hz	Power	CHARGE			Reg	Polarity protection	Cold Charge	SSM	Full security	Start/Stop engine	Fuse	CHARGER + TESTER	CONTROL	L x W x H cm / kg	Weight
			Moyen / Average (EN 60335)	Efficace / RMS	Reg											
MADE IN CHINA																
MADE IN GYS CHINA																

RECOMMENDATION	6V												12V												24V													
	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ Ah	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ Ah	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah
Maintenance																																						
ARTIC 800													1.6 • 25 Ah												1.6 Ah •													
ARTIC 1500													3 Ah •												> 40 Ah													
ARTIC 4000													2 Ah •												> 70 Ah													
ARTIC 8000													4 Ah •												> 160 Ah													
ENERGY 124													10 • 45 Ah																									
ENERGY 126													15 • 60 Ah																									
TCB 60													10 Ah •												> 60 Ah													
TCB 90													15 • 90 Ah																									
TCB 120													20 • 120 Ah																									



CT

CHARGERS



CT 160
9 A
 SSM
 1.5 m - 1.5 mm² → 40 A
 024106 **110,00 €HT**
 025325



CT 210
12 A
 SSM
 1.5 m - 2.5 mm² → 40 A
 024113 **135,00 €HT**
 025349

12/24 V • MANUAL **W**

CA



Protection for on-board electronics



CA 150
10 A
 SSM
 1.5 m - 2.5 mm² → 40 A
 024434 **180,00 €HT**



CA 360
25 A
 SSM
 2 m - 6 mm² → 60 A
 023185 **349,00 €HT**

12/24 V • AUTOMATIC **W2**

MULTICHARGE



6 charging speeds

MULTICHARGE CT 48
32 A
 SSM
 026087 **440,00 €HT**
 2 m - 6 mm² → 60 A

12/24/36/48 V • MANUAL **W**

WATTMATIC



Protection for on-board electronics



WATTMATIC 100
5 A GO > 3.5 V
 SSM START STOP
 024823 **118,00 €HT**
 1.5 m - 1.5 mm² → 40 A



WATTMATIC 140
9 A GO > 3.5 V
 SSM START STOP
 025608 **132,00 €HT**
 1.5 m - 2.5 mm² → 40 A



WATTMATIC 170
10 A GO > 3.5 V
 SSM START STOP
 025615 **146,00 €HT**
 1.8 m - 2.5 mm² → 40 A

6/12 V • AUTOMATIC **WUoU**



Fuse x10

10A WATTMATIC 100 054530 **3,00 €HT**

15A CT 160, WATTMATIC 140 054493 **3,00 €HT**

20A CT 210, WATTMATIC 150 & 170 054509 **3,00 €HT**

25A CA 150, WATTMATIC 180 054516 **3,00 €HT**

40A CT 48 054646 **10,20 €HT**

50A CA 360 054622 **5,00 €HT**

	Voltage	Power	Output	CHARGE				Eff. / RMS	Reg	Fuse	L x W x H cm / kg	Weight
				Average / Moyen (EN 60335)			Reg					
				Reg 1	Reg 2	Reg 3						
CT 160	230V, 50/60 Hz	190W	12/24V	12V > 7A 24V > 3A	9A (boost) 5A (boost)	—	13,5A 7,5A	2	15A	30.3 x 20.7 x 13.9 / 3.9	3,9 kg	
CT 210	230V, 50/60 Hz	260W	12/24V	12V > 8A 24V > 4A	12A (boost) 6A (boost)	—	18A 9A	2	20A	33.4 x 22.5 x 14.4 / 5.3	5,2 kg	
MULTICHARGE CT 48	230V, 50/60 Hz	1200W	12/24/36/48V	12V > 20,8A 24V > 20,1A 36V > 19,6A 48V > 15,5A	32,4A 31,8A 30,4A (boost) 18,7A (24,3A boost)	—	31A 29A 29A 28A	6 6 6 6	40A	40.5 x 34 x 24 / 15.8	15,5 kg	
CA 150	230V, 50/60 Hz	500W	12/24V	8A	10A (boost)	—	18A	2	25A	32.8 x 25.5 x 14.6 / 6.5	6 kg	
CA 360	230V, 50/60 Hz	920W	12/24V	7A	15A (boost1) 25A (boost2)	—	37A	3	50A	43 x 30 x 23 / 14	14 kg	
WATTMATIC 100	230V, 50 Hz	170W	6/12V	3A	5A	—	11.4A	2	10A	26.9 x 24.3 x 12.8 / 3.7	3.8 kg	
WATTMATIC 140	230V, 50 Hz	230W	6/12V	5A	9A (boost)	—	16.5A	2	15A	33.9 x 22.2 x 13.4 / 4.8	4.8 kg	
WATTMATIC 170	230V, 50 Hz	280W	6/12V	6.5A	10A (boost)	—	18.8A	2	20A	33.9 x 22.2 x 13.6 / 5	5 kg	



Download the page with prices



RECOMMENDATION	6V													12V													24V													48V												
	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ Ah	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ Ah	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ Ah	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ Ah
CT 160													12 V : 25 > 160 Ah - 24 V : 15 > 90 Ah																																							
CT 210													12 V : 35 > 210 Ah - 24 V : 20 > 100 Ah																																							
MULTICHARGE CT 48													+48 V												12, 24, 36 V : 90 > 450 Ah - 48 V : 70 > 360 Ah																											
CA 150													35 > 150 Ah																																							
CA 360													40 > 350 Ah																																							
WATTMATIC 100	15 > 100 Ah																																																			
WATTMATIC 140	20 > 150 Ah																																																			
WATTMATIC 170	25 > 180 Ah																																																			



BATIUM



SELF START MEMORY



AUTO DETECT BATTERY VOLTAGE DETECTION




ALL BATTERIES



Microprocessor Control

FULL PROTECTION



YouTube

PLAYLIST BATIUM

CHARGERS

AUTOMATIC, SMART & FAST



BATIUM 7.12
7 A GO > 2 V
SSM START STOP V AUTO DETECT

1.5 m - 1.5 mm² → 40 A

024496 **136,00 €HT**

024557



BATIUM 15.12
15 A GO > 0.5V
SSM START STOP V AUTO DETECT

1.5 m - 2.5 mm² → 40 A

024519 **173,00 €HT**

024632



6/12V IUoU



BATIUM 7.24
7 A GO > 2 V
SSM START STOP V AUTO DETECT

1.5 m - 1.5 mm² → 40 A

024502 **149,00 €HT**



BATIUM 15.24
15 A GO > 0.5V
SSM START STOP V AUTO DETECT

1.5 m - 2.5 mm² → 40 A

024526 **216,00 €HT**

024588



6/12/24V IUoU




45


BATIUM

CHARGERS


I REGULATED FAST CHARGE

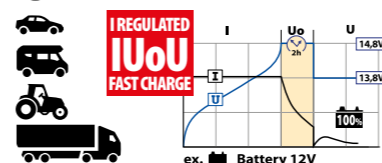

TRACTION BATTERY CHARGING

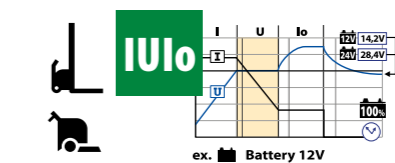

TEST



BATIUM 25.24 X
25 A GO > 0.5V
SSM START STOP V AUTO DETECT

2 m - 6 mm² → 60 A

024830 **561,00 €HT**

MODE SOS RECOVERY

6/12/24V



IUoU

Specific charge
Traction batteries



Fuse x10

15A BATIUM 7/12 & 7/24
054493 **3,00 €HT**


30A BATIUM 15/12 & 15/24
054523 **3,00 €HT**

RECOMMENDATION



	6V	12V	24V	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ Ah
BATIUM 7.12	•	•														
BATIUM 7.24	•	•														
BATIUM 15.12	•	•														
BATIUM 15.24	•	•														
BATIUM 25.24 X	•	•														

MADE IN FRANCE	50/60 Hz	Reg	CHARGE							Fuse	L x W x H cm / kg	MODE SOS RECOVERY	
			RMS / Efficace	Average / Moyen (EN 60335)				boost	Deeply Sulfated batteries				
				Reg 1	Reg 2	Reg 3	Reg 3						
BATIUM 7.12	230V	105W	6/12V	2	11 A	3 A	—	—	7 A	15 A	13.5 x 36 x 21 / 4.6	4.6 kg	—
BATIUM 15.12	230V	225W	6/12V	3	22 A	7 A	10 A	—	15 A	30 A	36.2 x 21.2 x 14 / 5.7	5.6 kg	•
BATIUM 7.24	230V	210W	6/12/24V	2	11 A	3 A	—	—	7 A	15 A	34.8 x 21 x 14.1 / 5.4	5.4 kg	—
BATIUM 15.24	230V	450W	6/12/24V	3	22 A	7 A	10 A	—	15 A	30 A	36.2 x 21 x 14.3 / 7.1	7.1 kg	•
BATIUM 25.24X	230V	1150W	6/12/24V	3	37 A	7 A	15 A	25 A	—	—	42 x 28 x 24.5 / 13.5	13.4 kg	•



Download the page with prices



DIAG-BATIUM

BSU

BATTERY SUPPORT UNIT

PFC POWER FACTOR CORRECTION

FV FLEXIBLE VOLTAGE



NEW
04 2025



DIAG-BATIUM 100.12

100 A


2.5 m - 16 mm²
076969

PFC FV

12 V

BSU: DIAG (POWER SUPPLY)

BSU adjustable voltage: 12.7 > 15.5 V




U2 ADJUSTABLE

CHARGE: Pb

Pb adjustable courant: 5 > 100 A

1. Status analysis
2. Recovery
3. Test desulfation
4. Desulfation
5. Fast charge 80%
6. Absorption
7. Floating 100%




Auto Recovery :
Recovers deeply discharged (min 2V) and/or sulfated batteries.
Récupération des éléments des batteries profondément déchargées (mini 2V) et/ou sulfatées.
Wiederherstellung der Zellen bei tiefentladenen bzw. sulfatierten Batterien (min. 2V).

CHARGE: LiFePO₄

LiFePO₄ adjustable courant: 5 > 100 A

1. UVP Wake up-Status analysis
2. Recovery
3. Fast charge 90%
4. Absorption 95%
5. Test
6. Completion
7. Equalization
8. Floating 100%



UVP Wake up (Under Voltage Protection)
Battery reactivation when in UVP protection.
Réactivation de la batterie en protection UVP.
Reaktivierung der Batterie mit UVP-Schutz.

Equalizing Balancing System
Balancing of the battery cells.
Équilibrage des cellules.
Ausgleich der Batteriezellen.

MADE IN FRANCE

DIAG-BATIUM 100.12	50 / 60 Hz	2,5 m	16	12V	1600W	2V	100 A	75 A @100 %	66 A @100 %	20 > 1200 Ah	Ø M6	20	NC	32 × 23.5 × 13.6 cm



MULTICHARGE STATION

CHARGERS

MULTICHARGE STATION

FULL PROTECTION

Reverse polarity

Over voltage

No sparks



12V

DHC 54E

4×5 A

Liquid-Gel

025097 **335,00 €HT**
35 × 19 × 7.5 cm / 2.5 kg

NEW
05 2025

6/12V

I REGULATED I UoU FAST CHARGE

MULTICHARGE STATION

4×10 A

Pb-Li

083578


34.5 × 38 × 31.5 cm / 6.3 kg



REPAIR MODE

RECOVERY OF SULFATED BATTERIES

I REGULATED I UoU FAST CHARGE




RECOMMENDATION

DHC 54E

MULTICHARGE STATION

	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah
6V												
12V												
24V												
6V												
10 × 100 Ah												
10 × 100 Ah												
8 × 250 Ah												
8 × 250 Ah												

Download the page with prices



BATIUM

CHARGERS

STARTERS & CHARGERS
AUTOMATIC



3 in 1

- AUTOMATIC CHARGE**
= BATTERY
- AUTOMATIC START**
- TEST ALTERNATOR**

TIMER

- UNIVERSAL MODE** **AUTO SELECTION**
- SULFATED BATTERIES**
- ALL BATTERIES**
- GO >1V**

- FULL PROTECTION**
- On-board electronics
 - Over voltage
 - No sparks



35/50 mm²



NATO OTAN Compatibility p.63



BSU Battery Support Unit

POWER SUPPLY **DIAG+ 60A**
Voltage adjustable 12 V · 15 V

BATTERY EXPERT

12/24V **12V** **12/24V**

STARTIUM 330E
25 A
1,9 m - 10 mm² → 500 A
026469 **570,00 €HT**
☎ : 025578

STARTIUM 480E
40 A
1,9 m - 16 mm² → 600 A
026483 **730,00 €HT**
☎ : 025578

STARTIUM 680E
45 A
2,2 m - 25 mm² → 600 A
026490 **810,00 €HT**
☎ : 025578

STARTIUM 980E
50 A
2,5 m - 35 mm² → 600 A
026506 **1 030,00 €HT**

DIAG STARTIUM 60-12
60 A
2,2 m - 25 mm² → 600 A
026513 **1 060,00 €HT**

DIAG STARTIUM 60-24
60 A
2,2 m - 25 mm² → 600 A
026520 **1 100,00 €HT**
☎ : 025592
☎ : 076969

MADE IN FRANCE	I ₁	CHARGE		START		BSU	FUSE	LxWxH cm / kg	LxWxH cm / kg	CCA (EN) START					
		CHARGE kW	START kW	1V/Cell	0V/Cell										
STARTIUM 330E	230V	16 A	0,8	6,5	12V : 20 > 370 Ah 24V : 20 > 300 Ah	40 A	25 A	4	—	•	12V : 165 A / 270 A 24V : 130 A / 210 A	100 A	26 x 26 x 47 / 15,5	28 x 28 x 47 / 16	500 A
STARTIUM 480E	230V	16 A	1,7	9	12V : 20 > 600 Ah 24V : 20 > 450 Ah	65 A	30 A	4	40 A	•	12V : 280 A / 390 A 24V : 210 A / 290 A	200 A	34 x 30 x 64 / 20,5	64 x 37 x 31 / 29	750 A
STARTIUM 680E	230V	16 A	2	10	12V : 20 > 675 Ah 24V : 20 > 525 Ah	75 A	30 A	4	45 A	•	12V : 380 A / 550 A 24V : 270 A / 380 A	200 A	34 x 30 x 64 / 25,5	65 x 37 x 31 / 31	900 A
STARTIUM 980E	230V	16 A	2	12	12V : 20 > 750 Ah 24V : 20 > 525 Ah	80 A	40 A	4	50 A	•	12V : 500 A / 720 A 24V : 400 A / 560 A	250 A	34 x 30 x 80 / 30	65 x 37 x 32 / 36	1400 A
DIAG STARTIUM 60-12	230V	16 A	2	10	12V : 20 > 900 Ah	95 A	60 A	4	—	•	12V : 310 A / 440 A	200 A	35 x 35 x 72 / 30,5	80 x 37 x 35 / 36	900 A
DIAG STARTIUM 60-24	230V	16 A	2	10	6V : 20 > 900 Ah 12V : 20 > 900 Ah 24V : 20 > 525 Ah	65 A / 95 A / 65 A	40 A / 60 A / 40 A	4	—	•	6V : — / — 12V : 300 A / 430 A 24V : 280 A / 410 A	200 A	35 x 35 x 72 / 30,5	80 x 37 x 35 / 36	900 A

Fuse x2

100 A Startium 330E 054394 4,50 €HT	200 A Startium 480E, 680E, Diag. 60-12, 60-24 054547 6,50 €HT	250 A Startium 980E 055568 7,00 €HT
--	--	--

RECOMMENDATION

	6V	12V	24V	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ Ah
STARTIUM 330E													40 > 80 Ah	80 > 120 Ah		
STARTIUM 480E													40 > 120 Ah	120 > 160 Ah		
STARTIUM 680E													50 > 180 Ah	180 > 200 Ah		
STARTIUM 980E													50 > 240 Ah			
DIAG STARTIUM 60-12													50 > 180 Ah	180 > 200 Ah		
DIAG STARTIUM 60-24													50 > 180 Ah	180 > 200 Ah		





BOOSTERS

6 - 12 - 24 V

Pb inside

GYSPACK	54
STARTPACK	58
ENERGVSTATION	61

LITHIUM inside

NOMAD POWER	64
-------------	----

SUPER CAPACITOR inside

STARTRONIC	68
GYSCAP	69

MEMORY SAVER

GYSPACK OBD / NOMAD OBD	70
-------------------------	----



GYSPACK

BOOSTERS Pb/LEAD

 POWER SUPPLY
12V DC



SPIRAL TECHNOLOGY



SPIRAL TECHNOLOGY



 **TPPL**
TECHNOLOGY
Thin Plate
Pure Lead
PREMIUM QUALITY BATTERIES




12 V **28 Ah** INSIDE HOBBIES OCCASIONAL PRO INTENSIVE

GYSPACK 660
1 900 A **640 A**
1V/Cell
1.3 m - 25 mm² → 600 A
027862 **370,00 €HT**
027992 32,50 €HT



INCLUDED GYSPACK 660

CHARGER
Power in 100-240 V/out 12 V
50/60 Hz
027992 **32,50 €HT**
025929



12 V **28 Ah** INSIDE HOBBIES OCCASIONAL PRO INTENSIVE

GYSPACK 750
2 500 A **750 A**
1V/Cell
1.3 m - 25 mm² → 600 A
026179 **456,00 €HT**
026353



INCLUDED GYSPACK 750

CHARGER
Power in 110-240 V/out 12 V
50/60 Hz
054684 **42,50 €HT**
054691



12 V **28 Ah** INSIDE HOBBIES OCCASIONAL PRO INTENSIVE

GYSPACK PRO 800
2 500 A **700 A**
1V/Cell
1.8 m - 25 mm² → 600 A
068759 **527,00 €HT**
072107

INCLUDED GYSPACK PRO 800

CHARGER
Power in 110-240 V/out 12 V
50/60 Hz
054684 **42,50 €HT**
054691



12 V **16 Ah** INSIDE HOBBIES OCCASIONAL PRO INTENSIVE

GYSPACK PRO 700
1 800 A **640 A**
1V/Cell
1.4 m - 25 mm² → 600 A
027077 **635,00 €HT**
1 096 701



INTEGRATED CHARGER
7 STEP

12 V **30 Ah** INSIDE HOBBIES OCCASIONAL PRO INTENSIVE

GYSPACK PRO 900
3 100 A **830 A**
1V/Cell
1.8 m - 35 mm² → 600 A
027084 **830,00 €HT**
027954 1 096 701



INTEGRATED CHARGER
7 STEP



DESIGN GYS FRANCE

MADE IN GYS CHINA

MADE IN FRANCE

	START	CHARGER INSIDE	EXTERNAL Charge 230V	Protection	Power out	Fuse	Fuse	LxWxH cm	LxWxH cm / kg
	1V/Cell 0 V/Cell Peak Battery	50/60 Hz	12V/2 A DC	ON/OFF	Memory	10A	1x200A		
GYSPACK 660	28 Ah 12V 640 A 1200 A 1900 A	•	110-240 V	•	12V DC	•	1x200 A	35 x 19 x 40	39 x 23 x 45 / 13.5
GYSPACK 750	28 Ah 12V 750 A 1450 A 2500 A	•	110-240 V	•	12V DC	•	2x200 A	35 x 19 x 40	39 x 23 x 45 / 13.5
GYSPACK PRO 800	28 Ah 12V 700 A 1320 A 2500 A	•	110-240 V	•	12V DC	•	2x200 A	31 x 19 x 35	32 x 23 x 37 / 18.4
GYSPACK PRO 700	16 Ah 12V 640 A 1200 A 1800 A	•	220-240 V	•	12V DC	•	1x200 A	33 x 15 x 32	35 x 24 x 36 / 12
GYSPACK PRO 900	30 Ah 12V 830 A 1700 A 3100 A	•	220-240 V	•	12V DC	•	1x300 A	33 x 15 x 32	35 x 24 x 36 / 16

RECOMMENDATION	6V	12V	24V	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ Ah
GYSPACK 660																
GYSPACK 750																
GYSPACK PRO 800																
GYSPACK PRO 700																
GYSPACK PRO 900																



Download the page with prices

BOOSTERS Pb/LEAD INSIDE

+ POWER SUPPLY
12V DC



12/24 V **22Ah + 22Ah** INSIDE OCCASIONAL PRO INTENSIVE

STARTPACK TRUCK

12V	3 200 A	750 A 1V/Cell
24V	1 600 A	650 A 1V/Cell




1.8 m - 25 mm² → 600 A **025448 515,00 €HT**
UK: 026339

STARTPACK TRUCK MOBILE

12V	3 200 A	750 A 1V/Cell
24V	1 600 A	650 A 1V/Cell

1.8 m - 25 mm² → 600 A **026025 655,00 €HT**
UK: 028807


INCLUDED STARTPACK TRUCK & TRUCK MOBILE



After each use
Après chaque utilisation
Nach jeder Anwendung

CHARGER

⊕ Power in 110-240 V/out 12V
50/60 Hz
054684 **42,50 €HT**
UK: 054691



OPTION MEMORY AUTO SAVE
CABLE OBD 1,5 m
054202 **23,10 €HT**
Fuse 7,5A



DESIGN GYS FRANCE

MADE IN GYS CHINA

MADE IN FRANCE

Inside	START			START PETROL & DIESEL	TEST OK	50/60 Hz	CHARGER INSIDE	EXTERNAL Charge 230V	Protection		Power out	Fuse	LxWxH cm	LxWxH cm / kg
	1V/Cell	0V/Cell	Peak Battery						ON	OFF				
2x 22Ah	12V	750 A	1450 A	3200 A	•	110-240 V	—	12V/2 A DC	•	•	⊖ 12V DC	1x300 A	37 x 20 x 46	39 x 22 x 50 / 18
	24V	650 A	1300 A	1600 A							⊖ 12V DC			
2x 16Ah	12V	900 A	1700 A	3600 A	—	220-240 V	4 A	—	•	•	—	1x300 A	26 x 20 x 48	34 x 20 x 51 / 19
	24V	700 A	1350 A	1800 A							—			
2x 30Ah	12V	1300 A	2400 A	6200 A	—	220-240 V	4 A	—	•	•	—	1x300 A	14 x 35 x 56	63 x 39 x 30 / 34
	24V	1200 A	2250 A	3100 A							—			



EnerSys
TPPL TECHNOLOGY
Thin Plate Pure Lead
PREMIUM QUALITY BATTERIES

12/24 V **16Ah + 16Ah** INSIDE OCCASIONAL PRO INTENSIVE

STARTPACK 12.24 CI

12V	3600 A	900 A 1V/Cell	★ 24V	1 800 A	700 A 1V/Cell
-----	---------------	------------------	-------	----------------	------------------

1.8 m - 35 mm² → 600 A **024991 1 095,00 €HT**
UK: 068155

STARTPACK PRO 12.24 CI

12V	6200 A	1300 A 1V/Cell	★★★ 24V	3100 A	1200 A 1V/Cell
-----	---------------	-------------------	---------	---------------	-------------------

2 m - 50 mm² → 600 A **028920 1 725,00 €HT**
UK: 068162

INCLUDED STARTPACK 12.24 & PRO 12.24

Fuse x2 200A 054547 **6,50 €HT**
300A 054561 **6,50 €HT**



INTEGRATED CHARGER
7 STEP

OFF Après chaque utilisation
After each use
Nach jeder Anwendung



RECOMMENDATION	6V	12V	24V	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ Ah
STARTPACK TRUCK	•	•														> 150 Ah
STARTPACK TRUCK MOBILE	•	•														> 150 Ah
STARTPACK 12.24 CI	•	•														> 160 Ah
STARTPACK PRO 12.24 CI	•	•														> 220 Ah



STARTPACK

BOOSTERS

Pb/LEAD

INSIDE



SMART STARTER MANAGEMENT SYSTEM

- FULL PROTECTION**
 - On-board electronics
 - Reverse polarity
 - Over voltage
 - No sparks
- AUTO DETECT**
 - Battery voltage detection
 - Microprocessor Control
 - TIMER Adjustable



INCLUDED



12/24 V

50 Ah SPIRAL + 50 Ah SPIRAL INSIDE

HOBBIES OCCASIONAL PRO +++ INTENSIVE

STARTPACK PRO 12.24 XL



12V **8 500 A** 1600 A 1V/Cell
 24V **4 250 A** 1400 A 1V/Cell

2 m - 70 mm² 1000 A 026711 2 270,00 €HT

OPTION



ENERGY STATION

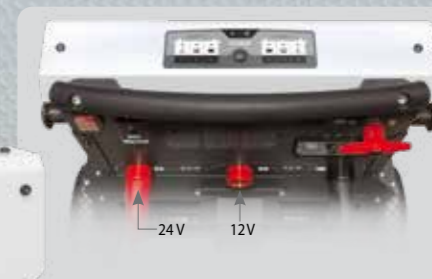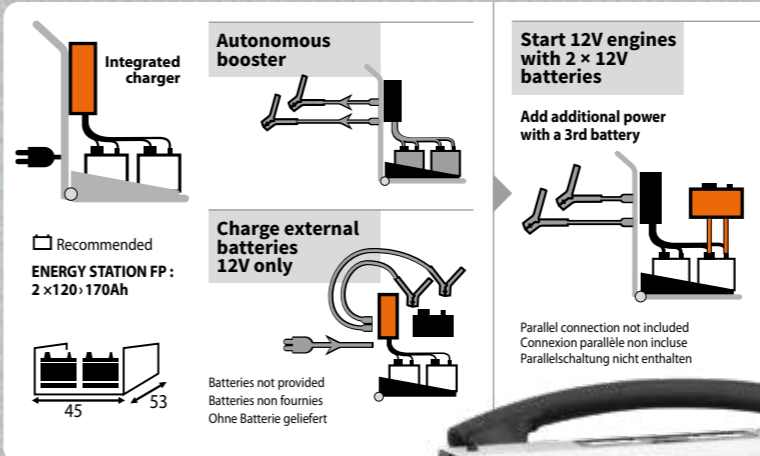

- FULL PROTECTION**
 - On-board electronics
 - Over voltage
 - No sparks
 - Reverse polarity

12/24 V

HOBBIES OCCASIONAL PRO INTENSIVE +++

ENERGY STATION FP

069589 1 020,00 €HT

INTEGRATED CHARGER 6 STEP



After each use / Après chaque utilisation / Nach jeder Anwendung

MADE IN FRANCE

STARTPACK PRO 12.24 XL

2x 50 Ah

12V 1 600 A 3 000 A 8 500 A

24V 1 400 A 2 600 A 4 250 A

Lead/LFP

according to battery / selon batteries / je nach Batterie (Pb only)

12/24 V

100 · 375 Ah (x2)

30 A inside

automatic

300 A

2 m ø 70 mm²

106 x 32 x 35

112 x 35 x 43 / 68

2,5 m ø 50 mm²

70 x 65 x 91

80 x 53 x 28 / 29

RECOMMENDATION

12V	24V	5 Ah	10 Ah	15 Ah	20 Ah	40 Ah	80 Ah	90 Ah	110 Ah	120 Ah	180 Ah	240 Ah	300 Ah	+ Ah
STARTPACK PRO 12.24 XL														
ENERGY STATION FP														



Download the page with prices

STARTPACK / ENERGYSTATION

BOOSTERS • Pb/LEAD INSIDE

SELECT THE RIGHT BOOSTER

CHOISISSEZ VOTRE BOOSTER • WÄHLEN SIE IHREN BOOSTER AUS

		12 V									12-24 V				ENERGY STATION FP
		GYSPACK 400	GYSPACK AIR	GYSPACK 600	GYSPACK PRO	GYSPACK 660	GYSPACK PRO 700	GYSPACK 750	GYSPACK PRO 800	GYSPACK PRO 900	STARTPACK TRUCK/ TRUCK MOBILE	STARTPACK 12.24 CI	STARTPACK PRO 12.24 CI	STARTPACK PRO 12.24 XL	ENERGY STATION FP
		025844	025455	026322	027336	026155	027862	027077	026179	068759	025448 / 026025	024991	028920	026711	069589
		6 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V
		12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	12 V	24V	24V	24V	24V	24V
START	1V/Cell	400 (6 V)	480 A	480 A	550 A	600 A	640 A	640 A	750 A	700 A	750 (12 V)	900 A (12 V)	1300 A (12 V)	1600 A (12 V)	/
	0V/Cell	450 (12 V)									650 (24 V)	700 A (24 V)	1200 A (24 V)	1400 A (24 V)	
	PEAK BATTERY	800 (6 V)	900 A	900 A	1050 A	1100 A	1200 A	1200 A	1450A	1320 A	1450 A (12 V)	1700 A (12 V)	2400 A (12 V)	3000 A (12 V)	
		850 (12 V)									1300 A (24 V)	1350 A (24 V)	2250 A (24 V)	2600 A (24 V)	
		3200 (6 V)	1250 A	1250 A	1750 A	1750 A	1900 A	1800 A	2500 A	2500 A	3200 A (12 V)	3600 A (12 V)	6200 A (12 V)	8500 A (12 V)	
		1600 (12 V)	1250 A	1250 A	1750 A	1750 A	1900 A	1800 A	2500 A	2500 A	1600 A (24 V)	1800 A (24 V)	3100 A (24 V)	4250 A (24 V)	
		2 x 20 Ah	18 Ah	18 Ah	22 Ah	22 Ah	28 Ah	16 Ah <i>EnerSys</i>	28 Ah	28 Ah	2 x 22 Ah	2 x 16 Ah <i>EnerSys</i>	2 x 30 Ah <i>EnerSys</i>	2 x 50 Ah <i>EXIDE TECHNOLOGIES</i>	
SPIRAL TECHNOLOGY															
		external 2 A	external 0,5 A	external 0,5 A	external 0,5 A	external 0,5 A	external 2 A	internal 2,5 A	external 2 A	external 2 A	external 2 A	internal 4 A	internal 4 A	external 6 A	internal 30A
		IUoU	WU	WU	WU	WU	IUoU	7 step	IUoU	IUoU	7 step	7 step	7 step	7 step	6 step
		12 V DC	12 V DC	12 V DC	12 V DC	12 V DC	12 V DC	12 V DC	12 V DC	12 V DC	12 V DC				
		1,8 m ø25 mm ²	0,6 m ø16 mm ²	1,1 m ø25 mm ²	0,6 m ø16 mm ²	1,1 m ø25 mm ²	1,3 m ø25 mm ²	1,4 m ø25 mm ²	1,3 m ø25 mm ²	1,8 m ø25 mm ²	1,8 m ø25 mm ²	1,8 m ø35 mm ²	2 m ø50 mm ²	2 m ø70 mm ²	2,5 m ø50 mm ²
		37x20x46	26x10x29	33x17x37	26x10x29	35x14x37	35x19x40	33x15x32	35x19x40	31x19x35	37x20x46/37x20x57	34x18x46	63x39x30	112x35x43	70x65x91
		18 kg	6,5 kg	8,5 kg	6,5 kg	9 kg	13,5 kg	12 kg	13,5 kg	18,4 kg	18/21 kg	22 kg	34 kg	68 kg	29 kg +

★ **MINI PRO**

★★★ **PRO**

★★★★★ **UNIVERSAL PRO**

ATTENTION HORS UTILISATION
Laisser le chargeur branché en permanence.

ACHTUNG WENN NICHT IN GEBRAUCH
Ladegerät dauernd angeschlossen lassen.

ATTENTION CUANDO ESTA APAGADO
Dejar el cargador conectado permanentemente.

OPGELET BUITEN GEBRUIK
Laat de lader onafgebroken aangesloten.

OFF
After each use
Après chaque utilisation
Nach jeder Anwendung

CAUTION ON STAND BY
Keep your GYSPACK connected to the mains supply.



NATO / OTAN : COMPATIBLE PRODUCTS

- Produits compatibles - Kompatible Produkte



Product	GYFLASH 30.12, 50.12 FV, 51.12, 100.12, 101.12 CNT	GYFLASH 101.24 CNT FV, 121.12 CNT FV, 125.12 CNT FV	GYFLASH 123.12 CNT FV, 103.24 CNT FV, 107.24 CNT FV	GYFLASH 108.12 CNT FV, 148.12 CNT FV, 158.12 CNT FV	GYFLASH 53.48 CNT FV	GYFLASH 15.24 XTREM	STARTIUM 980E	STARTPACK PRO 12.24 XL
NATO CONNECTOR 026780 99,00 eHT								
Anderson/NATO 5 m - 16 mm ² 026810 279,00 eHT	✓	—	—	—	✓	—	—	—
Texas/NATO 5 m - 25 mm ² 025707 306,00 eHT	—	✓	✓	✓	—	—	—	—
Texas/NATO 10 m - 25 mm ² 056626 499,00 eHT	—	—	—	—	—	—	—	—
Anderson/NATO 3.5 m - 50 mm ² 025653 295,00 eHT	—	—	—	—	—	—	✓	—
Anderson/NATO 2 m - 50 mm ² 026803 286,00 eHT	—	—	—	—	—	—	—	✓
Anderson/NATO 3 m - 50 mm ² 072589 338,00 eHT	—	—	—	—	—	—	—	—
2pts/NATO 5 m - 4 mm ² 025837 255,00 eHT	—	—	—	—	—	✓	—	—
2pts/NATO Spiral 5 m 028968 472,00 eHT	—	—	—	—	—	✓	—	—





TRACTION BATTERIES : COMPATIBLE PRODUCTS

- Produits compatibles - Kompatible Produkte



	TYPE	6 h	7 h	8 h	9 h	10 h	11 h	12 h	13 h	14 h	CURRENT	
24 V	BATTERY 25.24 X	liquid	75 Ah	90 Ah	120 Ah	125 Ah	130 Ah	140 Ah	155 Ah	165 Ah	180 Ah	25 A
	GYFLASH 30.24 HF	liquid	—	—	—	75 Ah	85 Ah	105 Ah	125 Ah	145 Ah	175 Ah	15 A
	GYFLASH 50.24 HF	liquid	—	—	—	250 Ah	290 Ah	350 Ah	410 Ah	480 Ah	550 Ah	50 A
		gel	—	—	—	260 Ah	290 Ah	340 Ah	400 Ah	480 Ah	550 Ah	50 A
	GYFLASH 51.12	liquid	130 Ah	150 Ah	180 Ah	210 Ah	240 Ah	270 Ah	310 Ah	350 Ah	390 Ah	25 A
		gel	—	—	130 Ah	150 Ah	160 Ah	180 Ah	200 Ah	220 Ah	240 Ah	25 A
36 / 48 V	GYFLASH 101.24	liquid	390 Ah	470 Ah	550 Ah	630 Ah	720 Ah	820 Ah	930 Ah	1050 Ah	1200 Ah	100 A
		gel	—	—	400 Ah	450 Ah	500 Ah	560 Ah	610 Ah	670 Ah	720 Ah	100 A
	GYFLASH 103.24	liquid	490 Ah	580 Ah	680 Ah	790 Ah	900 Ah	1020 Ah	1160 Ah	1310 Ah	1500 Ah	100 A
	GYFLASH 107.24	gel	—	—	500 Ah	560 Ah	630 Ah	700 Ah	760 Ah	830 Ah	900 Ah	100 A
	GYFLASH 25.48	liquid	130 Ah	150 Ah	180 Ah	210 Ah	240 Ah	270 Ah	310 Ah	350 Ah	390 Ah	25 A
		gel	—	—	130 Ah	150 Ah	160 Ah	180 Ah	200 Ah	220 Ah	240 Ah	25 A
36 / 48 V	GYFLASH 51.48	liquid	260 Ah	310 Ah	360 Ah	420 Ah	480 Ah	540 Ah	610 Ah	690 Ah	790 Ah	50 A
	GYFLASH 53.48	gel	—	—	260 Ah	300 Ah	330 Ah	370 Ah	400 Ah	440 Ah	470 Ah	50 A

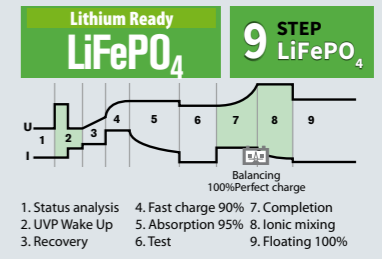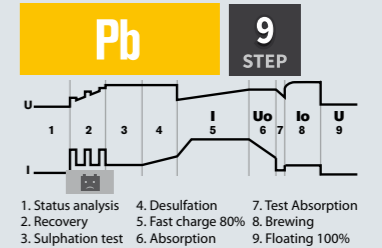

100 A		Cables Anderson 175A/Texas	5 m - 25 mm ²	025721 193,00 eHT
100 A		Cables REMA 160A/Texas	5 m - 25 mm ²	025714 229,00 eHT
15 A		Cables REMA 160A/Anderson	5 m - 16 mm ²	069091 189,00 eHT
50 A		Cables Anderson 175A/Anderson	5 m - 16 mm ²	069107 128,00 eHT

NATO COMPATIBILITY

Download the page with prices



BOOSTERS LITHIUM INSIDE

SPECIALIST HOBBY • Non professional use •
Utilisation non professionnelle • Nicht für gewerblichen
Gebrauch.



- ▶ START ENGINE
- + POWER BANK
- + LIGHT

PRO XL
★★★★

PRO
★★★



12V

NOMAD POWER 300
350 A



025875 110,00 €HT

NOMAD POWER 500
550 A



027145 175,00 €HT

NOMAD POWER 400
500 A



025882 123,00 €HT

NOMAD POWER PRO 700
600 A



027510 212,00 €HT

12 / 24 V

NOMAD POWER PRO TRUCK
2000 A 600 A
1V/Cell



027527 361,00 €HT

12 V

NOMAD POWER PRO 12 XL
3000 A 1000 A
1V/Cell



025912 547,00 €HT

24 V

NOMAD POWER PRO 24 XL
3000 A 1400 A
1V/Cell



025905 757,00 €HT

	LITHIUM			START			INPUT	OUTPUT			POWER BANK		cm	kg
	CAPACITY/CELL	TYPE	FULL CHARGE	1V/Cell	0V/Cell	Peak Battery		OB supply compatibility (with 054202)	OB supply compatibility (with 054202)	OB supply compatibility (with 054202)	OB supply compatibility (with 054202)			
NP 300	2.5 Ah - 37 Wh	LiCoO2	3 h	350 A	700 A	900 A	12V (Pb/Lead only)	USB-C: 5V/2A	(x1) USB 3.0 QC : 5/9/12V - 2A	(x1) USB-A : 5V - 2.1A	—	—	14.5 × 8.5 × 3	0.365
NP 400	3 Ah - 45 Wh	LiCoO2	3 h 30	500 A	1000 A	1200 A	12V (Pb/Lead only)	USB-C: 5V/2A	(x1) USB 3.0 QC : 5/9/12V - 2A (x1) USB-A : 5V - 2.1A	(x1) JACK DC ø5.5 : 15V - 5A	—	—	17.5 × 8.5 × 3	0.498
NP 500	5.25 Ah - 77.7 Wh	LiCoO2	4 h	550 A	1300 A	1500 A	12V (Pb/Lead only)	QC USB-C: 18W max	(x1) USB-A : 5V - 1A	(x1) USB-A : 5V - 2.1A	—	—	22.5 × 9.1 × 3.4	0.610
NP PRO 700	6 Ah - 92.5 Wh	LiCoO2	5h (with 15W charger) 1h15 (with 60W charger)	600 A	1500 A	2000 A	12V (Pb/Lead only)	PD USB-C: 60W max	(x1) USB 3.0 QC : 5V/2.4A 9V/2A 12V - 1.5A	(x1) USB-A : 5V - 2.1A (x1) USB-C Power Delivery : 60W (x1) JACK DC ø5.5 : 15V - 10A	—	—	22.8 × 10 × 3.8	0.82
NP PRO TRUCK	6 Ah - 155.4 Wh	LiCoO2	7 h	600 A	1500 A	2000 A	12V/24V (Pb/Lead only)	QC USB-C: 18W max	(x1) USB-A : 5V - 1A (x1) USB-A : 5V - 2.1A	(x1) Cigarette Lighter : 12V - 10A	•	—	24.8 × 24.8 × 9.6	2.4
NP PRO 12XL	8 Ah - 118.4 Wh	LiCoO2	2 h 30	1000 A	1800 A	3000 A	12V (Pb/Lead only)	JACK DC ø5.5 : 18V - 2A	(x2) USB-A : 5V - 2.1A (x2) Cigarette Lighter : 12V - 5A	(x1) QC USB-C : 18W max	•	—	27.4 × 27.8 × 11	5.6
NP PRO 24XL	8 Ah - 236.8 Wh	LiCoO2	5 h	1400 A	2400 A	3000 A	24V (Pb/lead only)	JACK DC ø5.5 : 18V - 2A	(x2) USB-A : 5V - 2.1A (x2) Cigarette Lighter : 12V - 5A	(x1) QC USB-C : 18W max	•	—	27.4 × 27.8 × 11	5.6

Recommendation	Motorcycle	Car	Van	Truck	Bus	Tractor	Excavator	Generator	Other
NP 300	5 > 70 Ah								
NP 400	5 > 90 Ah								
NP 500	5 > 120 Ah								
NP 700	5 > 140 Ah								
NP PRO TRUCK	5 > 140 Ah								
NP PRO 12XL	5 > 180 Ah								
NP PRO 24XL	> 240 Ah								



Download the page with prices



BOOSTERS LITHIUM INSIDE

SPECIALIST HOBBY • Non professional use • Utilisation non professionnelle • Nicht für gewerblichen Gebrauch.

▶ START ENGINE

+ POWER BANK



+ LIGHT

INCLUDED

SMART CABLE MULTI SECURITIES

- ✓ Nomad Power 401
- ✓ Nomad Power 501



- ✓ Nomad Power PRO 701
- ✓ Nomad Power PRO 801
- ✓ Nomad Power PRO 901 FC



NEW 05 2025

NEW 05 2025

12V

NOMAD POWER 401

900 A

350 A
1V/Cell



0,28 m - 5,2 mm²
AWG10

SMART CABLE
MULTI SECURITIES

087316

NOMAD POWER 501

1200 A

500 A
1V/Cell



0,28 m - 5,2 mm²
AWG10

SMART CABLE
MULTI SECURITIES

087323

NOMAD POWER PRO 701

1250 A

700 A
1V/Cell



0,26 m - 8,3 mm²
AWG8

SMART CABLE
MULTI SECURITIES

085855

NOMAD POWER PRO 801

1500 A

850 A
1V/Cell



0,26 m - 8,3 mm²
AWG8

SMART CABLE
MULTI SECURITIES

085831

NOMAD POWER PRO 901 FC

1700 A

900 A
1V/Cell



0,26 m - 8,3 mm²
AWG8

SMART CABLE
MULTI SECURITIES

085879

	LITHIUM			START			START PETROL & DIESEL	INPUT	OUTPUT	cm	kg
	CAPACITY/CELL	TYPE	FULL CHARGE	1V/Cell	0V/Cell	Peak Battery					
NP 401	2.5 Ah - 37 Wh	LiCoO2	3 h	350 A	700 A	900 A	12 V (Pb/Lead only)	USB-C : 5V/2A	(x1) USB 3.0 QC : 5/9/12V - 2A (x1) USB-A : 5V - 2.1A	14.5 x 8.5 x 3	0.32
NP 501	3 Ah - 45 Wh	LiCoO2	3 h 30	500 A	1000 A	1200 A	12 V (Pb/Lead only)	USB-C : 5V/2A	(x1) USB 3.0 QC : 5/9/12V - 2A (x1) USB-A : 5V - 2.1A (x1) JACK DC ø5.5 : 15V - 5A	17.5 x 8.5 x 3	0.48
NP PRO 701	4 Ah - 59.2 Wh	LiCoO2	3 h	700 A	1100 A	1250 A	12 V (Pb/Lead only)	USB-C : 5V/3A	(x1) USB 3.0 QC : 5V/2.4A 9V/2A 12V - 1.5A (x1) USB-A : 5V - 2.1A (x1) USB-C : 5V - 3A (x1) JACK DC ø5.5 : 15V - 10A	22.8 x 10 x 3.8	0.82
NP PRO 801	5 Ah - 74 Wh	LiCoO2	4 h	850 A	1300 A	1500 A	12 V (Pb/Lead only)	USB-C : 5V/3A	(x1) USB 3.0 QC : 5V/2.4A 9V/2A 12V - 1.5A (x1) USB-A : 5V - 2.1A (x1) USB-C : 5V - 3A (x1) JACK DC ø5.5 : 15V - 10A	22.8 x 10 x 3.8	0.82
NP PRO 901 FC	6 Ah - 92.5 Wh	LiCoO2	5h (with 15W charger) 1h15 (with 67W charger)	900 A	1400 A	1700 A	12 V (Pb/Lead only)	PD USB-C : 60W max	(x1) USB 3.0 QC : 5V/2.4A 9V/2A 12V - 1.5A (x1) USB-A : 5V - 2.1A (x1) USB-C Power Delivery : 60W (x1) JACK DC ø5.5 : 15V - 10A	22.8 x 10 x 3.8	0.82

i Recommendation	Icons for vehicle types											
	Motorcycle	Car	Van	Truck	Tractor	Boat	RV	RV	RV	RV	RV	RV
NP 401	5 > 70 Ah											
NP 501	5 > 90 Ah											
NP PRO 701	5 > 140 Ah											
NP PRO 801	5 > 150 Ah											
NP PRO 901 FC	5 > 150 Ah											

OPTION

- 67 W Fast USB-C Charger
✓ Nomad Power PRO 901 FC
087132
- 15 W USB-C Charger
✓ Nomad Power 401 / 501
✓ Nomad Power PRO 701 / PRO 801 / PRO 901 FC
087101
- 15 W USB-C Charger
✓ Nomad Power 401 / 501
✓ Nomad Power PRO 701 / PRO 801 / PRO 901 FC
087354




Download the page with prices

BOOSTERS SUPER CAPACITOR

BATTERYLESS - SANS BATTERIE
- OHNE BATTERIE

EASY TO USE



STARTRONIC 800 : 1 minute
STARTRONIC HYBRID 950 : 1 minute
STARTRONIC SUPERCAP 12 / 24 V : 3 minutes

DC/DC CONVERTER INSIDE (>5V)



800 : 4 minutes
HYBRID 950 : 4 minutes
SUPERCAP 12 / 24 V : 5 minutes



✓ SMART
✓ SAFE
✓ POWERFUL



- ✓ NO BATTERY INSIDE
- ✓ NO MAINTENANCE
- ✓ FAST TO USE
- ✓ BOOSTER SANS BATTERIE INTERNE
- ✓ AUCUNE MAINTENANCE
- ✓ RAPIDE D'UTILISATION
- ✓ KEINE INTERNE BATTERIE
- ✓ KEINE WARTUNG
- ✓ SCHNELL EINSETZBAR
- FULL PROTECTION
- 40/+65°C
- 1 MILLION CYCLES
- FAST CHARGE
- NO SULFATION DURING STORAGE
- UNLIMITED STARTS



5x 800 F INSIDE
12V

STARTRONIC 800
800 A 12V GO > 5V

026735 310,00 €HT

5x 950 F + Lithium INSIDE
12V

STARTRONIC HYBRID 950
950 A 12V GO > 1V

026117 385,00 €HT

10x 900 F INSIDE
12V / 24V

STARTRONIC SUPERCAP 12 / 24V
1050 A 12V GO > 7V
880 A 24V GO > 7V

082816 775,00 €HT

EASY & CONVENIENT

3 charging modes

<p>1 INCLUDED</p> <p>CLAMPS on running vehicle for Fast charge</p> <p>GYSCAP 680E : 1 minute GYSCAP 24V : 1 minute</p>	<p>2 INCLUDED</p> <p>CIGARETTE LIGHTER for Easy charge</p> <p>GYSCAP 680E : 10 minutes GYSCAP 24V : 30 minutes</p>	<p>3 OPTION</p> <p>GYFLASH 4.12 p.6 029422 F5 / Cigarette lighter p.16 029439</p> <p>GYFLASH 4.12 for mains charge</p> <p>GYSCAP 680E : 1 hour (max) GYSCAP 24V : 1 hour (max)</p>
---	---	---



12V
5x 3000 F INSIDE

GYSCAP 680E
1600 A 12V GO > 1V
026773 990,00 €HT
1.7 m - 25 mm² Cables 100% Cu



24V
10x 3000 F INSIDE

GYSCAP 24V
2500 A 24V GO > 2V
028944 1 450,00 €HT
2 m - 50 mm² Cables 100% Cu

INCLUDED STARTRONIC 800 & HYBRID 950
CIGARETTE LIGHTER for Easy charge
027404 6,00 €HT

INCLUDED STARTRONIC HYBRID 950 Lithium battery
027411 21,00 €HT

MADE IN CHINA

	START	START PETROL & DIESEL	Number of Capacitors	Integrated Inverter
STARTRONIC 800	800 A 1 400 A	-	12V 5x 800 F	•
STARTRONIC HYBRID 950	950 A 1 660 A	-	12V 5x 950 F	•
STARTRONIC SUPERCAP 12/24V	1 050 A 1 800 A 880 A 1 500 A	-	12V 10x 900 F 24V	•

MADE IN FRANCE

	START	START PETROL & DIESEL	Number of Capacitors	Integrated Inverter
GYSCAP 680E	1 600 A 2 700 A	9 000 A	12V 5x 3000 F	•
GYSCAP 24V	2 500 A 4 500 A	10 000 A	24V 10x 3000 F	•

	INPUT CHARGE				Charging time				MICRO USB Type B	internal lithium battery	LIGHT	cm	kg
	12V OFF	12V ON	12V/10A OFF	12V/10A ON	5V/2A	5V/2A	5V/2A	5V/2A					
STARTRONIC 800	4 min	60 s	4 min	4 min	5V/2A	40 min	-	-	26,7 x 19,5 x 5	1,86			
STARTRONIC HYBRID 950	4 min	60 s	4 min	4 min	5V/2A	40 min	30 min	•	25 x 18,5 x 6	1,86			
STARTRONIC SUPERCAP 12/24V	5 min	3 min	-	-	-	-	-	-	34 x 43 x 20	7			
GYSCAP 680E	-	1 min	10 min	10 min	-	-	-	-	35 x 44 x 19	8,2			
GYSCAP 24V	-	1 min	30 min	30 min	-	-	-	-	32 x 49 x 21,5	12			

Recommendation	Motorcycle	ATV	Motorboat	Caravan	Car	Van	Truck	Tractor	Excavator	Truck	Bus
STARTRONIC 800	5 < 90 Ah										
STARTRONIC HYBRID 950	5 < 100 Ah										
STARTRONIC SUPERCAP 12/24V	5 < 150 Ah										
GYSCAP 680 E	5 < 150 Ah										
GYSCAP 24V	225 Ah										



MEMORY SAVER

SAUVEGARDE MÉMOIRE • SICHTUNG DES SPEICHERS

Traditional Pb battery INSIDE

GYSPACK OBD
054998 **106,00 €HT**
055001



INSIDE	MEMORY SAVER		25 × 18 × 25 cm	3 kg
Pb 12V - 7 Ah	OBD < 4A	< 4A		



Lithium battery INSIDE


NOMAD OBD MEMORY SAVER **NEW 01 2025**
085480 **129,00 €HT**



FULL PROTECTION

Ultra light & Compact

INSIDE	MEMORY SAVER		14.5 × 7.2 × 3.5 cm	515 g
Li-ion 12V - 2 Ah	OBD < 4A	< 4A		

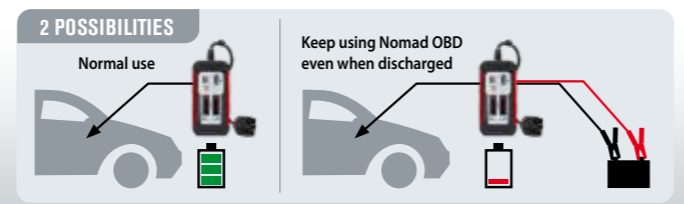

Connected to booster

CABLE OBD
- Câble OBD
- Kabel für OBD



MEMORY AUTO SAVE CABLE OBD
Fuse 7.5 A - 1.5 m
054202 **23,00 €HT**

Download the page with prices



ACCESSORIES

TRADITIONAL TESTERS	72
CONNECTED TESTERS	72
DIGITAL TESTERS	72
TESTERS WITH PRINTERS	74
POWER INVERTERS	76
PORTABLE ENERGY	78

JUMPER CABLES	80
EV CHARGING	81
EV BATTERY LIFT	82
EV BATTERY ACCESSORIES	83
BATTERY LIFT	84
ACCESSORIES	84
WORKING LIGHTS	86

TESTERS TRADITIONAL



NEW DESIGN
02/2025

TBP 100
6/12 V 20 > 100 Ah
055131 26,90 €HT

TBP 500
12 V 10 > 160 Ah
055148 109,00 €HT

TESTERS CONNECTED



x13
Languages
Sprachen

Download on the App Store
GET IT ON Google Play

BTW 6V/12V
6/12 V 7 > 240 Ah
077355 59,40 €HT

TESTERS DIGITAL



BT 001
12 V 7 > 230 Ah
056640 10,00 €HT



NBT 100
12 V 20 > 150 Ah
024151 49,40 €HT

NBT 200
12 V 20 > 150 Ah
024168 51,30 €HT

x1
Languages
Sprachen



DBT 300
12 V 4 > 150 Ah
024175 67,50 €HT

x10
Languages
Sprachen



DBT 350
12 V 7 > 240 Ah
025868 112,00 €HT

x8
Languages
Sprachen



DBT 410
6/12 V 7 > 240 Ah
083233 68,00 €HT

x12
Languages
Sprachen




DBT 500
6/12 V 7 > 240 Ah
079823 116,00 €HT

x12
Languages
Sprachen



DBT 710
6/12 V 7 > 240 Ah
083585 145,00 €HT




	BATTERY A	BATTERY V	TEST			DIGITAL	RESULT	TEMPERATURE COMPENSATION	kg	cm	L x W x H cm / kg	
			CHARGE & START SYSTEM VEHICLE									
TBP 100	6-12V	20 > 100 Ah	•	•	12V	—	5/10s	15 min	—	1.5	16x1.8x30	30.7x17.2x10.3 / 1.5
TBP 500	12V	10 > 160 Ah	•	•	12V	—	15s	15 min	—	3.75	27x26x13	31x28.6x18.2 / 3.8
BTW 6V/12V	6-12V	7 > 240 Ah	—	min 4,5V	12V	—	1s	instant	•	0.11	11x3x2	7.5x4.5x16.4 / 0.16
BT 001	12V	7 > 230 Ah	—	•	12V	LED	1s	instant	—	0.29	3x12x1.5	24.2x11.8x2.4 / 0.29
NBT 100	12V	20 > 150 Ah	•	min 7V	—	•	1s	instant	—	0.25	7x1.5x12	5x18x25.8 / 0.3
NBT 200	12V	20 > 150 Ah	•	min 7V	12V	•	1s	instant	—	0.25	7x1.5x12	5x18x25.8 / 0.3
DBT 300	12V	4 > 150 Ah	•	min 4,5V	12V	back-lit / rétro-éclairé	1s	instant	—	0.25	12x7.9x22.7	5x18x25.8 / 0.3
DBT 350	12V	7 > 240 Ah	•	min 8V	12 / 24V	back-lit / rétro-éclairé	1s	instant	•	0.8	9.6x3x13.8	6.5x10.5x21 / 0.35
DBT 410	6-12V	7 > 240 Ah	•	min 5V	6 / 12V	color screen 2.4"	1s	instant	•	0.24	8x1.8x13.4	4.2x8.5x15
DBT 500	6-12V	7 > 240 Ah	•	min 5V	6 / 12V	color screen 2.4"	1s	instant	•	0.3	8x2x14	5x18.5x18.5 / 0.44
DBT 710	6-12V	7 > 240 Ah	•	min 3V	12 / 24V	color screen 3.2"	1s	instant	•	0.9	10x3.5x20.5	10x18.4x25.3

i Recommendation	TEST										CURRENT CCA SAE	
	Battery/Batteries / Ladegeräte	Alternator Circuit / Circuit alternateur / Lichtmaschinenkreis	LIQUID	START / STOP ENGINE	EFB	AGM VRLA/GEL	🏍️	🚗	🚙	🚚		🚛
TBP 100	12V	🚗	12V	•	—	—	—	—	—	—	20 > 100 Ah	—
TBP 500	12V	🚗	12V	•	—	—	—	—	—	—	10 > 160 Ah	0 > 1000 A
BTW 6V/12V	6/12V	🚗	12V	•	•	•	•	•	•	•	7 > 240 Ah	10 > 2000 A
BT 001	12V	🚗	12V	•	•	•	•	•	•	•	7 > 230 Ah	—
NBT 100	12V	🚗	—	•	—	—	—	•	•	•	20 > 150 Ah	200 > 1200 A
NBT 200	12V	🚗	12V	•	—	—	•	•	•	•	20 > 150 Ah	200 > 1200 A
DBT 300	12V	🚗	12V	•	•	•	•	•	•	•	4 > 150 Ah	40 > 1200 A
DBT 350	12V	🚗	12-24V	•	•	•	•	•	•	•	7 > 240 Ah	40 > 2000 A
DBT 410	6/12V	🚗	6-12V	•	•	•	•	•	•	•	—	10 > 2000 A
DBT 500	6/12V	🚗	6-12V	•	•	•	•	•	•	•	7 > 240 Ah	100 > 2000 A
DBT 710	6/12V	🚗	6-12-24V	•	•	•	•	•	•	•	7 > 240 Ah	—

Languages - Sprachen

🇬🇧 🇫🇷 🇩🇪 🇮🇹 🇪🇸 🇵🇹 🇨🇿 🇳🇱 🇫🇷 🇵🇱 🇷🇺 🇹🇷 🇨🇳 🇯🇵 🇰🇷 🇮🇷

DBT 300	🇬🇧	🇫🇷	🇩🇪	🇮🇹	🇪🇸	🇵🇹	🇨🇿	🇳🇱	🇫🇷	🇵🇱	🇷🇺	🇹🇷	🇨🇳	🇯🇵	🇰🇷	🇮🇷
DBT 350	🇬🇧	🇫🇷	🇩🇪	🇮🇹	🇪🇸	🇵🇹	🇨🇿	🇳🇱	🇫🇷	🇵🇱	🇷🇺	🇹🇷	🇨🇳	🇯🇵	🇰🇷	🇮🇷
DBT 410	🇬🇧	🇫🇷	🇩🇪	🇮🇹	🇪🇸	🇵🇹	🇨🇿	🇳🇱	🇫🇷	🇵🇱	🇷🇺	🇹🇷	🇨🇳	🇯🇵	🇰🇷	🇮🇷
DBT 500	🇬🇧	🇫🇷	🇩🇪	🇮🇹	🇪🇸	🇵🇹	🇨🇿	🇳🇱	🇫🇷	🇵🇱	🇷🇺	🇹🇷	🇨🇳	🇯🇵	🇰🇷	🇮🇷
DBT 710	🇬🇧	🇫🇷	🇩🇪	🇮🇹	🇪🇸	🇵🇹	🇨🇿	🇳🇱	🇫🇷	🇵🇱	🇷🇺	🇹🇷	🇨🇳	🇯🇵	🇰🇷	🇮🇷
PBT 550	🇬🇧	🇫🇷	🇩🇪	🇮🇹	🇪🇸	🇵🇹	🇨🇿	🇳🇱	🇫🇷	🇵🇱	🇷🇺	🇹🇷	🇨🇳	🇯🇵	🇰🇷	🇮🇷
PBT 700	🇬🇧	🇫🇷	🇩🇪	🇮🇹	🇪🇸	🇵🇹	🇨🇿	🇳🇱	🇫🇷	🇵🇱	🇷🇺	🇹🇷	🇨🇳	🇯🇵	🇰🇷	🇮🇷
PBT 720	🇬🇧	🇫🇷	🇩🇪	🇮🇹	🇪🇸	🇵🇹	🇨🇿	🇳🇱	🇫🇷	🇵🇱	🇷🇺	🇹🇷	🇨🇳	🇯🇵	🇰🇷	🇮🇷
PBT 812	🇬🇧	🇫🇷	🇩🇪	🇮🇹	🇪🇸	🇵🇹	🇨🇿	🇳🇱	🇫🇷	🇵🇱	🇷🇺	🇹🇷	🇨🇳	🇯🇵	🇰🇷	🇮🇷
PBT 824	🇬🇧	🇫🇷	🇩🇪	🇮🇹	🇪🇸	🇵🇹	🇨🇿	🇳🇱	🇫🇷	🇵🇱	🇷🇺	🇹🇷	🇨🇳	🇯🇵	🇰🇷	🇮🇷
BTW 6V/12V	🇬🇧	🇫🇷	🇩🇪	🇮🇹	🇪🇸	🇵🇹	🇨🇿	🇳🇱	🇫🇷	🇵🇱	🇷🇺	🇹🇷	🇨🇳	🇯🇵	🇰🇷	🇮🇷





TESTERS WITH PRINTERS

056220 3 rd gen	x2	37 mm	7.5 mm	25 mm	BT 301 / BT 501 / BT 551
056237 4 th gen	x1	57 mm	28 mm	50 mm	RT 777 / PBT 700 / PBT 812 / PBT 824
056633 3 rd gen	x2	57 mm	7.5 mm	25 mm	PBT 550 / PBT 600 / PBT 700 / PBT 720 / PBT 812 / PBT 824 / SPM

YouTube
PLAYLIST
BATTERY TESTERS

Included for PBT 812 / PBT 824
4 wire connector = more precision
connecteur 4 fils = plus de précision

1.3 m 0.5 m *detachable
M/F plug Clamps 056510 43rd gen

COMPATIBILITY

USB Barcode scanner 1D/2D for PBT 812, PBT 824 027718 p.36

NEW DESIGN 04/2025

x6 Languages Sprachen

PBT 550 12V

PRINTER • 12 V

NEW 01/2025

x12 Languages Sprachen

XL Full Color screen

- Complete analysis
- Historical data
- Graphical data analysis Waveform function

• Download app & Print

PBT 700 6-12V

PRINTER • 12 V

NEW DESIGN 03/2025

x10 Languages Sprachen

Color screen

- Complete analysis
- Historical data
- Graphical data analysis Waveform function

• Battery-management software

PBT 812 6-12V

PRINTER • 6/12 V

NEW DESIGN 03/2025

x10 Languages Sprachen

LCD screen

- Complete analysis
- Battery-management software

PBT 824 6-12/24V

PRINTER • 6/12/24 V (2x12)

PBT 550

12 V 30 > 220 Ah

START STOP ALTERNATOR 12 V

024199 180,00 €HT

0.65 m x2 (included) 056633

PBT 700

12 V 7 > 240 Ah

START STOP ALTERNATOR 12/24 V

024229 231,00 €HT

1.2 m x1 (included) 056237

PBT 720

6/12 V 7 > 240 Ah

START STOP ALTERNATOR 6/12/24 V

083240 253,00 €HT

2.6 m x2 (included) 056633

PBT 812

6/12 V 7 > 240 Ah

START STOP ALTERNATOR 12/24 V

076686 369,00 €HT

x1 (included) 056237

PBT 824

6/12/24(2x12)V 7 > 240 Ah

START STOP ALTERNATOR 12/24 V

025738 386,00 €HT

x1 (included) 056237

MADE IN CHINA	Model	Voltage	Capacity	TEST		PRINT PAPER	DIGITAL	RESULT	TEMPERATURE COMPENSATION	Weight	Dimensions	L x W x H cm / kg
				CHARGE & START SYSTEM VEHICLE	AGM VRLA/GEL							
	PBT 550	12V	30 > 220 Ah	min 6V	12V	back-lit/rétro-éclairé	1s	instant	-	0.55	55 x 25	29 x 23 x 9 / 0.9
	PBT 700	12V	7 > 240 Ah	min 8V	12/24V	back-lit/rétro-éclairé	1s	instant	-	0.7	23.5 x 10.2 x 6.8	40.5 x 28 x 9 / 1.9
	PBT 720	6-12V	7 > 240 Ah	min 3V	6/12/24V	colour screen 3.2"	1s	instant	2x3.7V - 2A lithium-ion polymer batteries	0.9	26 x 10.5 x 5	27.2 x 36.4 x 9.3 / 2
	PBT 812	6-12V	7 > 240 Ah	min 1.5V	12/24V	colour TFT display 2.8"	1s	instant	6 x 1.5V LR6-AA or 18650 lithium battery (not included)	0.7	28 x 14 x 7.5	34 x 47 x 11.5 / 3.1
	PBT 824	6-12-24 (2x12)V	7 > 240 Ah	min 1.5V	12/24V	back-lit 4 colours / rétro-éclairé	1s	instant	6 x 1.5V LR6-AA	0.7	25 x 4.5 x 13	40 x 28 x 9 / 2.3

Recommendation	TEST		PRINT PAPER	LIQUID	START /STOP ENGINE	EFB	AGM VRLA/GEL	Truck	Van	Car	Motorcycle	CURRENT CCA SAE
	Battery/Batteries/Ladegeräte	Alternator Circuit/Circuit alterateur/Lichtmaschinenchaltkreis										
PBT 550	12V	12V	•	•	•	•						100 > 2000 A
PBT 700	12V	12-24V	•	•	•	•	7 > 240 Ah					40 > 2000 A
PBT 720	6V 12V	6-12-24V	•	•	•	•						10 > 2000 A
PBT 812	6V 12V	12V	•	•	•	•						25 > 3000 A
PBT 824	6V 12V 24V (2x12)	12-24V	•	•	•	•						40 > 2000 A

Download the page with prices

POWER INVERTERS





12/24 V DC > 230 V AC




PSW REMOTE CONTROL



MSW / PSW TECHNOLOGY

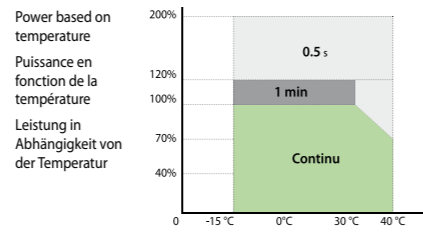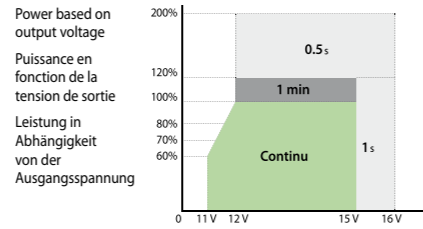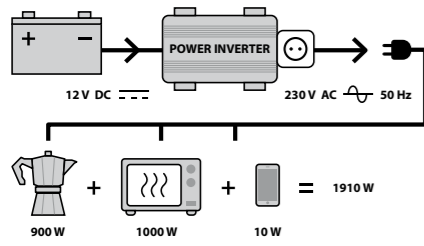

- Under-voltage / Over-voltage / Overload / Overheating / Output short-circuit
- Tension faible / Surtension / Surcharge / Surchauffe / Court-circuit
- Unterspannung / Überspannung / Überlastung / Überhitzung / Kurzschluss am Ausgang

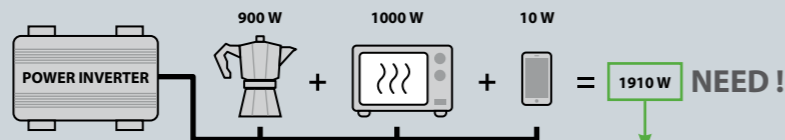

SELECT THE RIGHT POWER INVERTER

- CHOISISSEZ VOTRE CONVERTISSEUR
- WÄHLEN SIE IHREN WECHSELRICHTER

CONVERGYS 150	CONVERGYS 300	PSW 601W RC-12	PSW 1002W RC-12	PSW 1502W RC-12	PSW 2002W RC-12	PSW 2002W RC-24	MSW 82000
12 V		24 V					
		70 Ah		200 Ah			

HOME APPLIANCE - ÉLECTROMÉNAGER

Appliance	Power (W)	Usage duration (h)	Capacity (Ah)
Microwave - Micro-Ondes - Mikrowelle	700 - 1000 W	30 - 50 min	1 h 30 - 2 h
Toaster - Grille Pain	800 - 1500 W	20 - 40 min	1 h - 2 h
Fridge - Réfrigérateur - Kühlschrank (40 L)	45 W	12 h	35 h
Kettle - Bouilloire - Wasserkocher	700 - 2500 W	15 - 45 min	35 min - 2 h
Espresso coffee maker - Cafetière espresso - Espresso-Maschine	1000 - 1600 W	20 - 30 min	1 h - 1 h 30
Drip coffee maker - Cafetière filtre - Filterkaffee-Maschine	800 - 1200 W	25 - 40 min	1 h 30 - 2 h

ELECTRONIC - ÉLECTRONIQUE

Device	Power (W)	Usage duration (h)	Capacity (Ah)
Mobile phone - Téléphone - Telefon	5 - 10 W	55 - 110 h	155 - 310 h
Laptop - Ordinateur portable	60 - 95 W	5 - 9 h	16 - 28 h
Radio	10 - 40 W	14 - 55 h	40 - 155 h
TV 15"	40 W	13 h 30	39 h
TV 21"	50 W	11 h	31 h
Video game console - Console de jeux vidéo - Konsole für Videospiele	39 - 100 W	5 - 13 h	16 - 39 h
Camera - Appareil photo - Fotoapparat	4 - 19 W	25 - 135 h	78 - 390 h

COMFORT - CONFORT

Device	Power (W)	Usage duration (h)	Capacity (Ah)
Light - Eclairage - Beleuchtung	100 W	5 h 30	16 h
Electrical heater - Chauffage électrique - Elektrische Heizung	1800 - 2500 W	12 - 20 min	35 - 45 min
Fan - Ventilateur - Lüfter	50 W	11 h	31 h
Hairdryer - Séche cheveux - Fön	1000 - 2000 W	15 - 30 min	45 min - 1 h 30

SAILING - NAUTISME

Device	Power (W)	Usage duration (h)	Capacity (Ah)
Navigation lights - Feux de navigation - Navigationslichter	24 W	30 h	80 h
Radar	24 W	30 h	80 h
Autopilot mode - Pilote automatique	60 W	9 h	30 h
GPS/Sat nav. - GPS	6 W	110 h	310 h

* Usage duration (h) = $\frac{80\% \times \text{Capacity (Ah)} \times \text{Optimum Efficiency (\%)} \times \text{Input DC (V)}}{\text{Power (W)}}$

Model	Power	Peak power	Pure Sin Wave	Optimum Efficiency	Input DC	Output AC	Output USB (2,1) DC	max 150W	Universal	Weight	Height	Dimensions
CONVERGYS 150	150W	300W	—	90,5%	12V	230V	5V · 2 A	•	•	0,5 kg	N/A	8 × 16,5 × 24,7 / 0,45
CONVERGYS 300	300W	600W	—	85%	12V	230V	5V · 2 A	•	•	0,95 kg	N/A	21,3 × 20 × 6,8 / 0,95
PSW 601W RC-12	600W	1200W	•	90%	12V	230V	5V · 2 A	—	•	2,2 kg	26,5 × 17 × 7,5	31 × 22 × 12 / 2,3
PSW 1002W RC-12	1000W	2000W	•	90%	12V	230V	5V · 2 A	—	•	4,7 kg	37,5 × 21 × 10	44 × 27 × 16 / 4,5
PSW 1502W RC-12	1500W	3000W	•	90%	12V	230V	5V · 2 A	—	•	5 kg	37,5 × 21 × 10	44 × 27 × 16 / 4,6
PSW 2002W RC-12	2000W	4000W	•	90%	12V	230V	5V · 2 A	—	•	6,25 kg	38,5 × 25 × 10	43 × 32 × 16,5 / 5,7
MSW 82000	2000W	4000W	—	80%	24V	230V	5V · 2 A	—	•	5,8 kg	35 × 20 × 28	45,3 × 26,8 × 16,1 / 4,9
PSW 2002W RC-24	2000W	4000W	•	90%	24V	230V	5V · 2 A	—	•	6,25 kg	38,5 × 25 × 10	43 × 32 × 16,5 / 5,7

12 V CONVERGYS CONVERGYS

CONVERGYS 150
027022 50,00 €HT



CONVERGYS 300
027053 67,00 €HT
027046



12 V PSW PURE SINE WAVE

PSW
601W RC-12

067332 180,00 €HT
067349

PSW
1002W RC-12

067356 318,00 €HT
067363

PSW
1502W RC-12

067370 393,00 €HT
067387

PSW
2002W RC-12

067394 538,00 €HT
067400

24 V MSW MODIFIED SINE WAVE

MSW 82000

027237 365,00 €HT
027244

24 V PSW PURE SINE WAVE

PSW
2002W RC-24

067417 539,00 €HT
067424

INCLUDED FOR ALL



PORTABLE ENERGY

DC/AC

OPTIONS

Solar panel
for Power pack 520, 1300, 14.22, Energys DC/DC
monocrystalline
ETFE quality - 18V - 100 W max
OUTPUT
USB 1 : 5V/3A
USB 2 : 5V/3A ; 9V/2A ; 12V/1.5A
Type C : 5V/3A ; 9V/2A ; 12V/1.5A
Jack : 18V/5.6A max
079410 **244,00 €HT**



POWER PACK 520
518 Wh **500 W**
027961 **550,00 €HT**



POWER PACK 1300
1280 Wh **1000 W**
071988 **1 620,00 €HT**



POWER PACK 14.22
1408 Wh **2200 W**
085206 **1 630,00 €HT**



USAGE DURATION	POWER						
	50 W	100 W	250 W	500 W	1000 W	1500 W	2200 W
POWER PACK 520	8 h	4 h	1 h 40	50 min	—	—	—
POWER PACK 1300	20 h	10 h	4 h	2 h	1 h	—	—
POWER PACK 14.22	22 h	11 h	4 h 30	2 h 15	1 h 05	45 min	30 min
POWER PACK 14.15 FC	22 h	11 h	4 h 30	2 h 15	1 h 05	45 min	—

FULL PROTECTION

Short-circuit protection,
Over-current protection,
Over-voltage protection,
Under-voltage protection,
Over-load protection,
Temperature protection


MPPT integrated

Solar panel compatibility


OPTIONS

Power batt 14 External battery **NEW 02 2025**
for Power pack 14.15 FC
085213 **870,00 €HT**


1408 Wh - LiFePO4
- 42 x 30 x 25.5 cm / 12.8 kg



Solar panel for Power pack 14.15 FC
079403 **390,00 €HT**
monocrystalline - ETFE quality
48V - 220 W max
OUTPUT: **MC4** **NEW 04 2025**

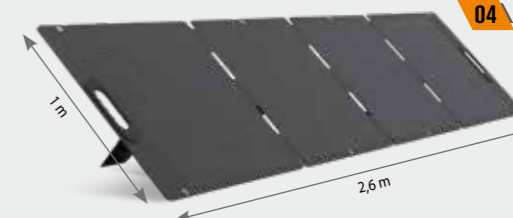

POWER PACK 14.15 FC
1408 Wh **1500 W**
085169 **1 730,00 €HT**



LITHIUM Battery	CAPACITY	TYPE	INPUT	RECHARGING TIME			AC OUTPUT		DC OUTPUT	LIGHT	BOOSTER			OPTION COMPATIBILITY		L x W x H cm / kg	L x W x H cm / kg		
				MAINS 0-100%	SOLAR PANEL 0-100% (depending on weather conditions)	DC CHARGING 0-100%	230V / 50 Hz (Pure Sine Wave)	Rating POWER OUT			Peak Power OUT	12V Petrol & Diesel (Lead / LFP)	1V/Cell	0V/Cell	SOLAR PANEL			EXTERNAL BATTERY	
POWER PACK 520	20 Ah 518 Wh	LiPo	JACK DC ø3.5 (Main / solar charging): 12-30V 80W PD USB-C (DC charging): 45W	6 h 30	8 h 30 - 11 h 30	11 h 30	(x2) Type C / E / F / G / I	500 W	750 W (3sec)	(x1) PD USB-C: 45W max (x1) QC USB-C: 18W max (x2) USB-A: 5V - 2.4A	(x2) JACK DC ø5.5: 12V - 10A (x1) Cigarette Lighter: 12V - 10A	(x1) LED	—	—	—	•	—	26.4 x 23.4 x 16.3 / 5.14	33.5 x 23 x 34.5 / 6.2
POWER PACK 1300	50 Ah 1280 Wh	LFP	JACK DC ø5.5 (Main / solar charging): 12-30V 200W	7 h	12 h - 14 h	—	(x3) Type C / E / F (euro plug)	1000 W	2000 W	(x3) USB-A: 5V - 2.4A (x1) QC USB-A: 18W max (x2) PD USB-C: 100W max	(x2) JACK DC ø5.5: 12V - 10A (x1) Cigarette Lighter: 12V - 10A	(x1) LED	•	500 A	1000 A	•	—	36 x 27 x 28 / 17.5	45 x 39 x 39 / 20.6
POWER PACK 14.22	55 Ah 1408 Wh	LFP	JACK DC ø5.5 (Main / solar charging): 12-30V 200W	7 h 30	13 h - 15 h	—	(x3) Type C / E / F (euro plug)	2200 W	4400 W	(x3) USB-A: 5V - 2.4A (x1) QC USB-A: 18W max (x2) PD USB-C: 100W max	(x2) JACK DC ø5.5: 12V - 10A (x1) Cigarette Lighter: 12V - 10A	(x1) LED	•	500 A	1000 A	•	—	36 x 27 x 28 / 17.1	—
POWER PACK 14.15 FC	55 Ah 1408 Wh	LFP	C14 EURO PLUG (AC charging): 230Vac 1500W ANDERSON (solar charging): 30-60V 400W JACK DC ø5.5 (DC charging): 12V 120W	1 h	6 h - 8 h	11 h	(x3) Type C / E / F (euro plug)	1500 W	3000 W	(x3) USB-A: 5V - 2.4A (x1) QC USB-A: 18W max (x2) PD USB-C: 100W max	(x2) JACK DC ø5.5: 12V - 10A (x1) Cigarette Lighter: 12V - 10A	(x1) LED	•	500 A	1000 A	•	•	36 x 27 x 28 / 19.3	43 x 36.5 x 33.5 / 22

RECOMMENDATION	Game	Phone	Car	TV	Monitor	Tablet	Drill	Saw	Blender	Power Tools	Light	Other
POWER PACK 520	•	•	•	•	•	•	•	•	•	•	•	•
POWER PACK 1300	•	•	•	•	•	•	•	•	•	•	•	•
POWER PACK 14.22	•	•	•	•	•	•	•	•	•	•	•	•
POWER PACK 14.15 FC	•	•	•	•	•	•	•	•	•	•	•	•

JUMPER CABLES

320 A > 1000 A

056206					
564015					
056404					
056602					
056190					
056312					
056329					
056336					
056343					
056558					
056541					
056619					

PRO BRASS CLAMPS

BRASS CLAMPS, NON-INSULATED - Pincas laiton, non isolées - Messingklemmen, nicht isoliert - Pinzas de latón, no aisladas - Morsetti in ottone non isolati



					TYPE
056206 52,00 €HT	320 A	3 m	—	16 mm ²	(CCA)
564015 56,00 €HT	500 A	3 m	—	25 mm ²	(CCA)
056404 110,00 €HT	700 A	4,5 m	—	35 mm ²	(CCA)
056602 235,00 €HT	1000 A	5,1 m	—	50 mm ²	(100% Cu)
056190 209,00 €HT	1000 A	4,5 m	INCLUDED	50 mm ²	(100% Cu)

MADE IN CHINA

MADE IN FRANCE

PRO INSULATED CLAMPS

INSULATED CLAMPS - Pincas isolées - Isolierte klemmen - Pinzas aisladas - Morsetti isolate



		ESSENCE BENZINE PETROL	DIESEL				TYPE	DIN 72553
056312 15,00 €HT	200 A	1,5l		3 m	—	10 mm ²	≈ 0 Cu	—
056329 18,00 €HT	320 A	2,5l		3 m	—	16 mm ²	≈ 0 Cu	•
056336 29,30 €HT	500 A	5,5l	3l	3,5 m	—	25 mm ²	≈ 0 Cu	•
056343 44,00 €HT	700 A	7l	4l	4,5 m	—	35 mm ²	≈ 0 Cu	•
056558 185,00 €HT	1000 A	7l	4l	4,5 m	INCLUDED	50 mm ²	(100% Cu)	—

MADE IN CHINA

MADE IN FRANCE

SUPER PRO INSULATED CLAMPS

INCLUDED

MADE IN FRANCE

				TYPE					TYPE
056541 154,00 €HT	700 A	4,5 m	35 mm ²	100% Cu		056619 265,00 €HT	1000 A	5 m	50 mm ² 100% Cu

EV CHARGING

Rechargement EV • Laden für Elektrofahrzeuge
• Carga de EV • Ricarica per veicoli elettrici

6 A > 32 A

		RECHARGE TIME (20 to 100%)*													
		230 V (1 ph)						400 V (3 ph)							
Power Grid	Example of battery capacity	6 A	8 A	10 A	13 A	16 A	20 A	6 A	8 A	10 A	13 A	16 A	20 A	32 A	
		1.4kW	1.8kW	2.3kW	2.9kW	3.7kW	4.6kW	4.1kW	5.5kW	6.9kW	8.9kW	11kW	14kW	22kW	
	10 kW	6 h	4 h30	3 h30	3 h	2 h	1 h30	1 h	2 h	1 h30	1 h	50 min	40 min	-	-
	20 kW	12 h	9 h	7 h	5 h30	4 h30	3 h30	2 h	4 h	3 h	2 h30	2 h	1 h30	-	-
	50 kW	29 h	22 h	18 h	13 h	11 h	9 h	5 h30	9 h	7 h30	6 h	4 h30	3 h	2 h30	1 h30
	60 kW	35 h	26 h	21 h	16 h	13 h	10 h30	6 h30	11 h30	9 h	7 h	5 h30	4 h	3 h30	2 h
	70 kW	40 h	30 h	24 h	19 h	15 h	12 h	7 h30	13 h30	10 h	8 h	6 h30	5 h	4 h	2 h30
	80 kW	46 h	34 h	27 h	22 h	17 h	14 h	8 h30	15 h30	11 h30	9 h	7 h	6 h	4 h30	3 h

*Indicated values

INCLUDED

	075320	080676
	✓	—
	—	✓
	✓	✓
	—	✓

more output options...

available on request

IP 65 ↓ 23 x 16 x 9 cm
↑ 46 x 20,5 x 38 cm / ▲ 6 kg



SUPER PRO SMART EV CHARGE

6 → 32A 1ph / 3ph

TIMER FUNCTION
Delay start 1h → 24h

075320 **1 038,00 €HT**
080676

EV CHARGING - PORTABLE

10/16 A 1 ph

028975 **388,00 €HT**

EV CHARGING - STANDARD CABLES

32 A 1 ph

079687 **220,00 €HT**

32 A 3 ph

079694 **300,00 €HT**

EV CHARGING - SPIRAL CABLE

32 A 1 ph

028982 **329,00 €HT**

	IP	U ₁	I ₁	P					
SUPER PRO SMART EV CHARGE	65	1 ph 3 ph + N	6/8/10/13/ 16/20/32 A	1,4 → 22kW	•	—	—	5 m	Type 2
EV CHARGING PORTABLE	66	1 ph	10 / 16 A	2,3 / 3,7kW	•	—	—	5 m	Type 2
EV CHARGING SPIRAL CABLE	66	1 ph	32 A	7,4 kW	—	•	—	5 m	Type 2
EV CHARGING STANDARD CABLES	55	1 ph	32 A	7,4 kW	—	•	—	5 m	Type 2
	55	3 ph	32 A	22 kW	—	•	—	5 m	Type 2

OPTION

↓ 21 x 43 x 57 cm
060432 **159,00 €HT**



IP67





EV BATTERY LIFT

1T MOBILE LIFTING TABLE WITH HYDROPNEUMATIC PUMP - Table élévatrice mobile 1 tonne avec pompe hydropneumatique - Mobilier 1-Tonnen-Hubtisch mit hydropneumatischer Pumpe

083912 **3 300,00 €HT**
Weight : 385 kg

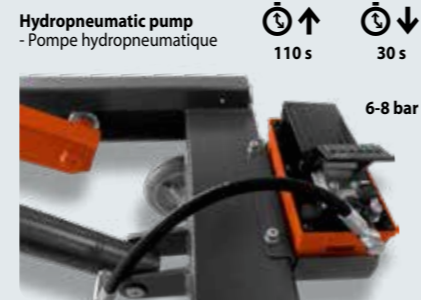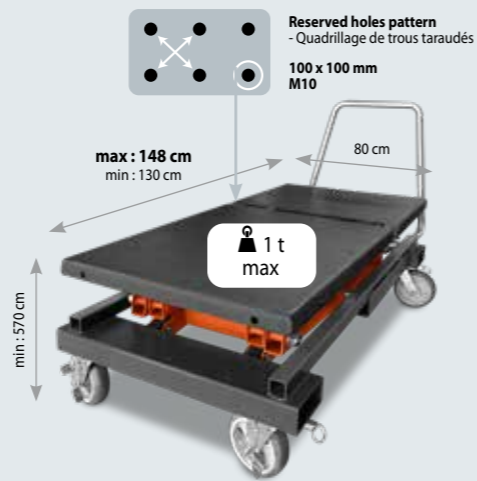

1.2T LIFTING TABLE FOR ELECTRIC VEHICLE BATTERIES - Table de levage 1.2T pour batteries de véhicule électrique - 1.2T Hubtisch für Elektrofahrzeugbatterien

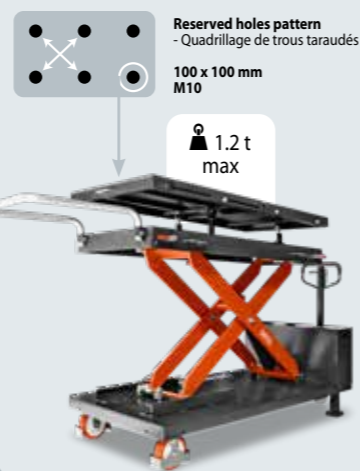

088030
Weight : 760 kg

Included
Hydraulic oil 5 L
Huile hydraulique 5 L
062160 **69,00 €HT**


EV BATTERY ACCESSORIES

EQUIPMENT FOR OPERATIONS ON ELECTRIC AND HYBRID VEHICLES - Équipements pour opérations sur véhicules électriques & hybrides - Ausrüstung für den Betrieb von Elektro- und Hybridfahrzeugen

FACE SHIELD WITH HEADBAND
- ÉCRAN FACIAL AVEC SERRE-TÊTE
068018 **55,00 €HT**



INSULATING GLOVES (T10)
- GANTS ISOLANTS (T10)
068025 **92,00 €HT**

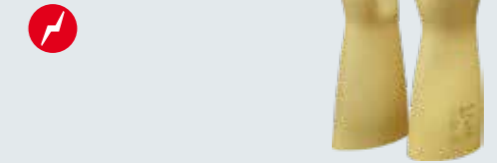

25 pieces insulated tools 1000V - Coffret de 25 outils isolés 1000V
- Box mit 25 isolierten Werkzeugen 1000V
066489 **425,00 €HT**

7/8/10/12/14/15/17/19/22 mm sockets - Douilles 7/8/10/12/14/15/17/19/22 mm	x 9	T-handle - Poignée en T	x 1
175 mm universal pliers in chrome vanadium - Pince universelle de 175 mm en chrome vanadium	x 1	Open ended wrenches 7/8/10/12/14/17 mm - Clés plates à fourches 7/8/10/12/14/17 mm	x 6
Cutting pliers 150 mm in chrome vanadium - Pince coupante 150 mm en chrome vanadium	x 1	Cable knife - Couteau pour câble	x 1
3/8" ratchet - Cluqiet en 3/8"	x 1	Philips PH1x100/PH2x100 mm screwdriver - Tournevis Philips PH1x100/PH2x100 mm	x 2
Extension 100 mm - Rallonge 100 mm	x 1	Flat screwdriver 5.5x125 / 4x100 mm - Tournevis plats 5.5x125/4x100 mm	x 2



Kit for marking the area of intervention
- Kit pour le balisage de la zone d'intervention
- Kennzeichnungsset für Hochvolt-Bereiche
064409 **525,00 €HT**

Red and white warning pole - Balise de signalisation rouge et blanche	x 4
Red and white bounding line - Chaîne de délimitation rouge et blanche	x 1
Sign board "Danger, working area EVH" - Pancarte de signalisation "Danger, zone de travail VEH"	x 2



TROUSERS - Pantalon - Hose



98% cotton, 2% antistatic	S (40/42) 046368 125,00 €HT
M (44/46) 046375 125,00 €HT	L (48/50) 046382 125,00 €HT
XL (52/54) 046399 125,00 €HT	XXL (56/58) 046412 125,00 €HT

JACKET - Veste - Jacke



98% cotton, 2% antistatic	S (40/42) 046313 140,00 €HT
M (44/46) 046320 140,00 €HT	L (48/50) 046337 140,00 €HT
XL (52/54) 046344 140,00 €HT	XXL (56/58) 046351 140,00 €HT


BATTERY LIFT

DIABLE JOBSITE XL
039568 **400,00 €HT**
↓ 18.3 kg ⊗ 66 x 47 x 20 cm / 19.5 kg



MULTITOOL TRUCK
max 200 kg


067158 **2 125,00 €HT**
↓ 90 kg
⊗ 123 x 79 x 39 cm / 95 kg

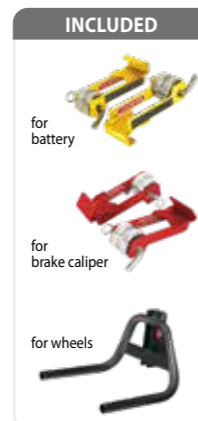

DINSE CONNECTORS • Connecteurs Texas • Stecker • Conectores

	I A max	mm ²	mm	mm	Compatibility	Ref.
CFM 25.14	200	10/25	14	9	CM 25.14, CF 25.14	x1 045507 9,00 €HT
CFM 50.21	300	35/50	21	13	CM 50.21, CF 50.21	x1 045606 11,20 €HT
CFM 70.21	400	50/70	21	13	CM 70.21	x1 047488 17,00 €HT
CM 25.14	200	10/25	14	9	CF 25.14	x20 045668 44,00 €HT
CM 50.21	300	35/50	21	13	CF 50.21	x10 045613 56,00 €HT
CM 70.21	400	50/70	21	13	CF 70.21	x5 045750 34,00 €HT
CM 95.24	500	70/95	24	13	CF 95.24	x5 047495 79,00 €HT
CF 25.14	200	10/25	14	9	CM 25.14	x30 045651 142,00 €HT
CF 50.21	300	35/50	21	13	CM 50.21	x10 045620 59,00 €HT
CF 70.24	400	50/70	24	13	CM 70.21	x5 045736 41,00 €HT
CF 95.24	500	70/95	24	13	CM 95.24	x5 072374 44,00 €HT

BATTERY TERMINAL CLEANING BRUSH



QUICK CONNECTORS



FUSES • Fusibles • Sicherungen • Fusibles • 保险丝

Quantity	Product	Price	Quantity	Product	Price	Quantity	Product	Price	Quantity	Product	Price	Quantity	Product	Price
x5	6.3A 054578	3,80 €HT	x10	10A 054530	3,80 €HT	x2	100A 054486	7,00 €HT	x2	100A 054394	4,50 €HT	x2	200A 054547	6,50 €HT
	10A 056527	3,80 €HT		15A 054493	3,80 €HT								250A 055568	7,00 €HT
				20A 054509	3,80 €HT								300A 054561	6,80 €HT
				25A 054516	3,80 €HT								M5 40A 054646	10,00 €HT
				30A 054523	3,80 €HT								M5 50A 054622	5,00 €HT
				40A 054554	3,80 €HT								M5 80A 054653	6,00 €HT
													M5 125A 054585	6,00 €HT
													M5 150A 054639	7,00 €HT
													M6 40A 071599	6,00 €HT


Anti-arc protection



SOLAR POWERED CHARGER WITH ACCESSORIES




Adjustable battery carrier



Acidimeter (PH Meter)



ACCESSORIES



CLAMPS - Pinces • Klemmen • Pinzas • 充电夹

	40 A	60 A	60 A	200 A	300 A	600 A	650 A	700 A	850 A	1000 A	300 A	600 A
I 100%	30 A	60 A	60 A	100 A	200 A	120 A	120 A	120 A	170 A	200 A	-	-
I peak	75 A	150 A	150 A	200 A	300 A	600 A	650 A	700 A	850 A	1000 A	-	-
max	× 30 mm	× 25 mm	× 25 mm	× 38 mm	× 45 mm	× 40 mm	× 35 mm	× 28 mm	× 44 mm	× 55 mm	× 38 mm	× 38 mm
max	2.5 mm ²	10 mm ²	16 mm ²	16 mm ²	25 mm ²	35 mm ²	25 mm ²	25 mm ²	35 mm ²	70 mm ²	50 mm ²	95 mm ²

CABLE LUGS • Cosses • Terminal Kabelschuhe • Kabelschuhe

16 mm ² M10 ×10	038219 60,00 €HT	25 mm ² M5 ×100	047525 46,30 €HT	10 mm ² M16 ×100	047501 17,00 €HT
25 mm ² M10 ×10	038226 70,00 €HT	35 mm ² M6 ×100	047532 55,00 €HT	16 mm ² M15 ×100	047518 25,00 €HT
35 mm ² M14 ×10	038233 85,00 €HT	50 mm ² M10 ×100	047549 120,00 €HT	70 mm ² M10 ×100	047556 23,00 €HT
50 mm ² M14 ×10	038240 105,00 €HT			95 mm ² M10 ×50	047570 235,00 €HT

CABLES EN 60245-6/H01N2-D (Rubber - Caoutchouc)


EN 60974-9	↔ L		A (60%)	A (35%)
16 mm ²	100 m	046252	121	131
	× m	046207 8,20 €HT		
25 mm ²	5 m	045408 53,00 €HT	165	185
	100 m	046603		
35 mm ²	× m	046306 12,20 €HT	211	243
	100 m	046702		
50 mm ²	× m	046405 15,50 €HT	275	323
	100 m	046801		
70 mm ²	× m	046757 20,30 €HT	351	419
	100 m	046832 29,20 €HT		
95 mm ²	× m	046863 40,40 €HT	433	527
	100 m			

HIGH FLEXIBILITY ELECTRICAL CABLES

	↔ L		A (60%)	A (35%)
10 mm ²	100 m	054882	88	92
	20 m	056107 87,20 €HT		
16 mm ²	100 m	054905	120	130
	20 m	056121 116,00 €HT		
25 mm ²	100 m	054929	164	184
	20 m	056145 180,00 €HT		
35 mm ²	100 m	054943	210	240
	20 m	056169 240,00 €HT		
50 mm ²	100 m	054967	273	320
	20 m	056183 341,00 €HT		
70 mm ²	50 m	056565	310	380

BATTERY TERMINAL • Cosses batterie • Polklemmen • Terminales batería • 电池端子

	⊙ 10 mm / 35 mm ²	⊙ 13 mm / 50 mm ²	⊙ 16 mm / 70 mm ²
1	054431 70,00 €HT	054332 76,00 €HT	054417 85,00 €HT
2	054448 70,00 €HT	054349 76,00 €HT	054363 82,00 €HT
3	054447 70,00 €HT	054332 76,00 €HT	054337 159,00 €HT
4	054448 70,00 €HT	054349 76,00 €HT	054337 159,00 €HT
5	054447 70,00 €HT	054332 76,00 €HT	054337 159,00 €HT
6	054448 70,00 €HT	054349 76,00 €HT	054337 159,00 €HT

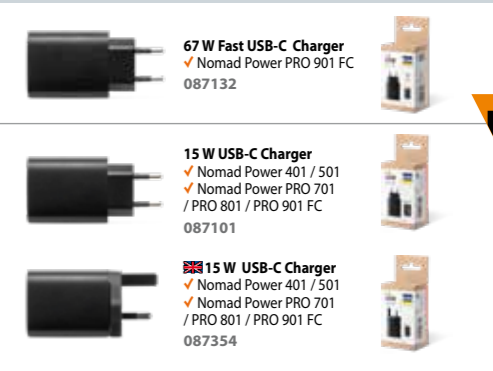

NEW



HAND LAMPS - Lampes baladeuses - Handleuchte

PORTABLE LAMP 400 L

400 lumens

COB LED
Li-ion
Charging time: 8h
operating time
High position: 2.5 h
Low position: 5 h
Top light (1 W): 6 h

↳ 23 x 6.5 x 4 cm / 480 g
↳ 13 x 7 x 23.5 cm

059153 **36.00 € HT**

PORTABLE LAMP PRO 600 L

250-600 lumens

COB LED, 80 CRI
3.7 V - 2200 mAh Li-ion
micro USB charging (3.5 h)
operating time
High position: 1.5 h
Low position: 4.5 h
Top light (100 lumens): 10 h

↳ 19 x 5.6 x 2.9 cm / 240 g
↳ 9 x 13 x 23.2 cm / 520 g
IP54

060883

UNDER BONNET LAMP - Lampe sous capot - Leuchte für Motorhaube

UNDER BONNET LAMP 600 L

500-1000 lumens

120 COB LED
3.7V - 4000 mAh Li-ion
charging time: 10/12 h
operating time
High position: 4 h
Low position: 8 h

↳ 26 x 10 x 10 cm
↳ 2.3 kg
↳ 23.5 x 12 x 69.5 cm

059962 **89.00 € HT**

UNDER BONNET LAMP 800 L

250-800 lumens

120 COB LED
3.7V - 4000 mAh Li-ion
charging time: 10/12 h
operating time
High position: 3 h
Low position: 6 h

↳ 2kg
↳ 60.7 x 15 x 11.3 cm

058002 **80.00 € HT**

INSPECTION LAMP - Lampe inspection - Inspektionslampen

INSPECTION LAMP MINI 350 L

0-350 lumens

COB LED
3.7V - 1100 mAh Li-ion
USB charging (3 h)
operating time
3 > 6.5 h

IP 20

075894 **49.00 € HT**

INSPECTION LAMP PRO 800 L

120-800 lumens

COB LED
3.7V - 2600 mAh Li-ion
USB charging (4 h)
operating time
2.5 > 9 h

IP 54

075900 **54.00 € HT**

FRONTAL INSPECTION LAMP 280 L

100-280 lumens

3 W COB LED
80 CRI+, 6500 K
3.7 V - 1500 mAh Li-po
micro USB charging
operating time
High position: 2 h
Low position: 6 h

IP 65 / ↳ 7.8 x 4.7 x 4.2 cm
↳ 40 x 8.8 x 5.5 cm / 200 g

060845 **38.00 € HT**

360° AMBIANT LAMP - Lampe ambiance 360°

AMBIANCE LAMP 360° PORTABLE 1000 L

60 > 1000 lumens

>80 CRI SMD LED
6500 K
3.7V - 5200 mAh Li-ion
USB charging (4.5 h) / USB power supply
operating time 2 > 27 h

↳ 26 x 7.5 x 7.5 cm / 660 g
↳ 7.8 x 8 x 35 cm
IP 54

059764 **88.00 € HT**

WORKLIGHT WITH TRIPOD - Projecteur sur trépied - Arbeitsleuchte mit Standfuß

TRIPOD LAMP 1800 L

1800 lumens

3x 55 COB LED
total 165 LED
1.8 m power cord

↳ 3.2 kg
↳ 95 x 14.5 x 14 cm

059146 **86.00 € HT**

TRIPOD LAMP 3000 L

3000 lumens

35 W COB LED
2 m power cord

IP 44
↳ 4.1 kg
↳ 103 x 21.5 x 10 cm

059979 **87.00 € HT**

TRIPOD LAMP 4000 L

4000 lumens

3x 20 COB LED,
total 60 LED
3 m power cord

↳ 6.4 kg
↳ 22 x 16 x 116 cm

059986 **127.00 € HT**

AUTOMOTIVE BATTERIES





Batteries de démarrage - Starterbatterien - Baterias de arranque
- Automotive accu's - Baterias de Automóvel - Mnatopiec
огонутув - Пусковые батареи - 汽车启动电池

Curves	LIQUID Calcium / Silver	Start & Stop / AGM / EFB / GEL / Optima	Unattended charge	100% charged	Maintenance	Battery desulphation	Fast Charge	Fast Charge ++
W	✓	-	-	-	-	-	-	-
W2	✓	-	✓	-	-	-	-	-
WU	✓	-	✓	-	✓	-	-	-
WUoU	✓	✓	✓	✓	✓	-	-	-
IWUoU	✓	✓	✓	✓	✓	✓	✓	-
I REGULATED IUoU FAST CHARGE	✓	✓	✓	✓	✓	(except Artic)	✓	✓
7 STEP GYSFLASH Pb	✓	✓	✓	✓	✓	✓	✓	✓


GYSFLASH Lithium

8 STEP Li-ion 8 STEP LiFePO₄ 9 STEP Li-ion 9 STEP LiFePO₄

LiFePO₄ / Li-ion / Li-Po / NMC / LCO / MCO / NCA...

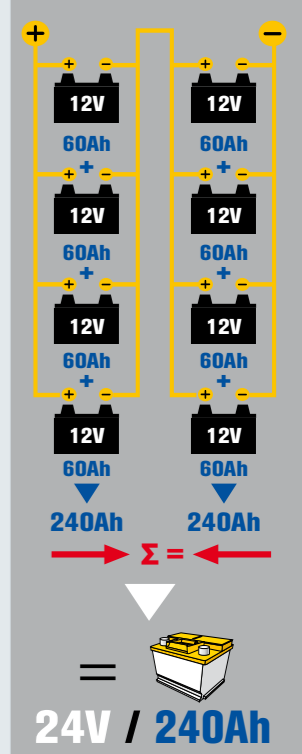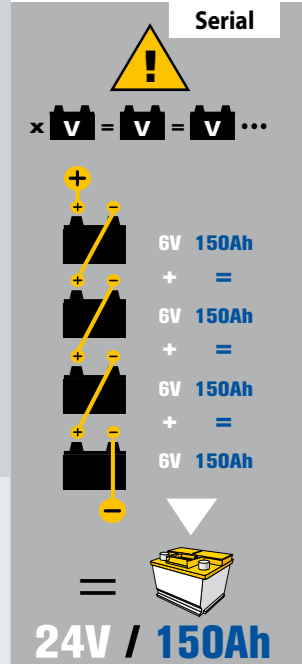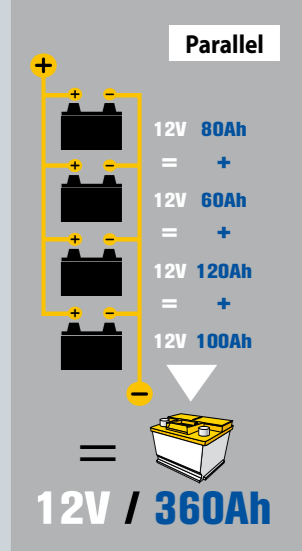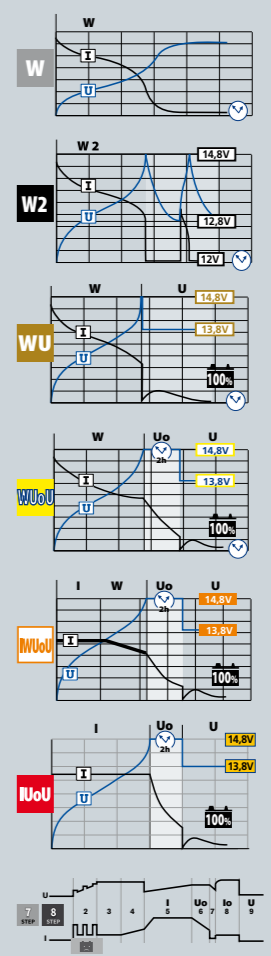

MARKETING

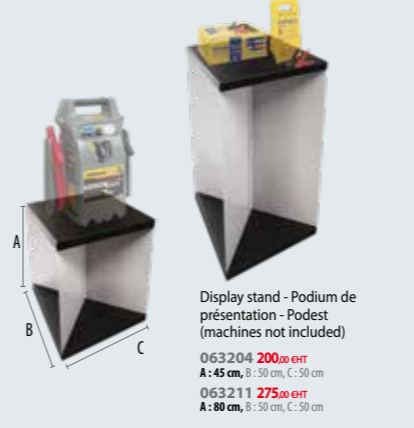

Type	FA1	FA2	SB1
complete - complet - komplett	062429 7 621.10 € HT	062443 8 983.00 € HT	061149 5 951.00 € HT
without display stand - sans linéaire - ohne Regal	062436 6 721.10 € HT	062450 8 083.00 € HT	062412 5 051.00 € HT



INVEST IN THE FUTURE

CHARGE

2025 A

GYS France

Headquarters

1 rue de la Croix des Landes
CS 54159
53941 Saint-Berthevin - Cedex
Laval - France
Tel +33 2 43 01 23 60
E-mail service.client@gys.fr



ZI, 134 bd des Loges
53941 Saint-Berthevin
Laval - France

Logistic center

2 Rue Jean Dausset
53810 Changé - France
Tel +33 2 43 01 54 33

GYS Germany

Professor-Wieler
Straße 11
52070 Aachen
Deutschland
Tel +49 241/189-23-710
Fax +49 241/189-23-719
E-mail aachen@gys.fr

GYS UK

Unit 3 - Great Central Way
Rugby - Warwickshire
CV21 3XH
United Kingdom
Tel +44 1926 338 609
Fax +44 1926 429 764
E-mail uk@gys.fr

GYS Italia

Via Porta Est, 7
30020 Marcon - VE
Italia
Tel +39 041 53 21 565
E-mail italia@gys.fr

GYS Ibérica

Avenida Pirineos 31
Nave 9
San Sebastian de los Reyes
28703 Madrid
España
Tel +34 917 409 790
E-mail iberica@gys.fr

GYS China

Lot N°15 - 6666 bd Songze
201706 Qingpu
Shanghai - China
Tel +86 6221 4461
Fax +86 5226 0067
www.gys-china.com.cn
E-mail
contact@gys-china.com.cn

LinkedIn
 YouTube
 WeChat
 Facebook
 Instagram



www.gys.fr

Distributed by

